

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD NOTES**

OF THE

DEPENDENT RESURVEY OF

A PORTION OF THE NORTH BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND THE

SUBDIVISION OF CERTAIN SECTIONS,

TOWNSHIP 43 NORTH, RANGE 108 WEST,

OF THE SIXTH PRINCIPAL MERIDIAN,

IN THE STATE OF WYOMING.

**EXECUTED BY**

LYNN A. FORBES

CADASTRAL SURVEYOR

Under Special Instructions dated June 27, 2000, approved June 27, 2000, which provided for the surveys included under Group Number 678, and assignment instructions dated June 27, 2000.

Survey commenced August 23, 2000

Survey completed August 13, 2002

# INDEX DIAGRAM

Township 43 North, Range 108 West

	5	4	2		
6	5 23	4	3	7 2	1
7	8	18 9	10	6 11	12
18	17	17 16 16	15	14	13
19	20	15 21 14	10 22	23	24
30 21	22 29 20	12 28 11	8 27	26	25
31	32	33	34	35	36

Subdivision of Section 5.....	Page 24
Subdivision of Section 11.....	Page 25
Subdivision of Section 21.....	Page 27
Subdivision of Section 28.....	Page 30
Subdivision of Section 29.....	Page 32

## T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

## CHAINS

The following field notes are those of the dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines, and the subdivision of certain sections, Township 43 North, Range 108 West, Sixth Principal Meridian, Wyoming.

Howard B. Carpenter and J. Frank Warner surveyed the exterior boundaries and a portion of the subdivisional lines in 1891. Fred W. Fink and J. Frank Warner retraced the north boundary in 1898, during the survey of T. 44 N., R. 108 W. They did change the record. They also established closing corners from the north. Mark D. King dependently resurveyed portions of the east, west and north boundaries, and subdivisional lines in 1923.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 678, Wyoming, dated June 27, 2000.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data was thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed with a Global Positioning System (GPS) TRIMBLE Model 4700 receiver and by chaining methods. The instruments were maintained in proper adjustment at all times. The direction of all lines refer to the true meridian. All directions, distances and geographic positions were determined by Global Position System Methods.

The geographic position of the corner of sections 27, 28, 33 and 34, based on NAD 83 and determined by Global Positioning System methods, is:

Latitude 43° 39' 11.87" N., Longitude 109° 48' 47.44" W.

The magnetic declination is 12½° E.

Dependent Resurvey, Portion of the North Boundary,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS

(Restoring the survey executed by  
Howard B. Carpenter and J. Frank Warner in 1891 and  
portions of the subsequent retracement executed by  
J. Frank Warner and Fred W. Fink in 1898,  
and by Mark D. King in 1923)

Beginning at the cor. of secs. 2 and 3 only, on the N. bdy. of  
the Tp., determined from the remains of the original bearing  
trees

A pine, 12 ins. diam., bears S. 46° E., 25 lks.  
dist., mkd. T43N R108W S2 BT on partially healed  
blaze. (Record: S. 50° E.)

A pine, 14 ins. diam., bears N. 56° W., 46 lks.  
dist., mkd. with an open blaze. (original marks  
defaced during the survey of T44N R108W)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the  
ground, in a mound of stone, 2 ft. base to top, with brass cap  
mkd.

T44N R108W	
S 35	
<hr style="width: 50%; margin: 0 auto;"/>	
S 3	S 2
T43N R108W	
2000	

from which a new bearing tree

A pine, 12 ins. diam., bears S. 60° W., 17.5 lks.  
dist., mkd. T43N R108W S3 BT.

Cor. is located 6 lks. N. of cor. of buck rail fence extending S.  
and W., and 20 lks. S. of trail road extending SE. and WNW.

S. 89° 25' W., on the N. bdy. of sec. 3.

Over mountainous terrain, through pine timber along buck rail  
fence.

0.65 The closing cor. of secs. 34 and 35, T. 44 N., R. 108 W.,  
monumented with a limestone, 12x8x6 ins., firmly set 4 ins. in  
the ground, dimly mkd. 2 notches on E. edge and 4 notches on W.  
edge., no other mks. visible.

Dependent Resurvey, Portion of the North Boundary,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>from which</p> <p>A pine, 14 ins. diam., bears N. 27° E., 11 lks. dist., mkd. T44N R108W S35 BT. (Record: N. 52° 13' E., 13 lks.)</p> <p>A pine, 14 ins. diam., bears N. 40° W., 70 lks. dist., with illegible scribing on partially healed blaze.</p>
39.93	<p>Point for the ¼ sec. cor. of sec. 3 only, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T44N R108W ----- 1/4 S 3 T43N R108W 2000</p> <p>Cor. is 67 lks. S. of buck rail fence extending E. and W.</p>
79.82	<p>The cor. of secs. 3 and 4 only, T. 43 N., R. 108 W., monumented with a granite stone, 14x12x12 ins., loosely set 4 ins. in the ground, plainly mkd. 3 notches on E. face and 3 notches on W. face, with a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T44N R108W S 34 ----- S 4   S 3 T43N   R108W 2000</p>
	<p>from which</p> <p>A pine, 10 ins. diam., bears S. 55° E., 30 lks. dist., mkd. T43N R108W S3 BT.</p>

Dependent Resurvey, Portion of the North Boundary,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Bury the original stone alongside the iron post and rebuild the mound of stone, 2 ft. base, 2 ft. high, S. of the cor.</p> <p>Cor. is located 1.5 chs. N. of buck rail fence extending irregularly E. and W.</p>
	<p>S. 89° 52' W., on the N. bdy. of sec. 4.</p> <p>Over mountainous terrain, through pine timber.</p>
0.93	<p>From this point, the closing cor. of secs. 33 and 34 only, T. 44 N., R. 108 W., bears NORTH, 0.05 chs. dist., monumented with a granite stone, 16x12x6 ins., firmly set, projecting 10 ins. above the ground, plainly mkd. CC on N. face, 3 notches on E. edge and 3 notches on W. edge, in a mound of stone, 3 ft. base. Did not monument.</p> <p>Cor. is located in remains of buck rail fence, extending ENE. and WSW.</p>
40.69	<p>Point for the ¼ sec. cor. of sec. 4 only, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T44N R108W</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1/4 S 4</p> <p style="text-align: center;">T43N R108W</p> <p style="text-align: center;">2000</p>
	<p>Set an aluminum sign post alongside the iron post.</p>
81.38	<p>The cor. of secs. 4, 5, 32 and 33, monumented with a limestone, 15x8x7 ins., firmly set 8 ins. in the ground, in a collar of stone, plainly mkd. 4 grooves on E. face and 2 grooves on W. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey, Portion of the North Boundary,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T44N R108W S 32   S 33 ----- S 5   S 4 T43N 2000</p> <p>Bury the original cor. stone alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.</p>
	<p>S. 89° 16' W., bet. secs. 5 and 32.</p> <p>Over mountainous terrain.</p>
39.57	<p>Point for the ¼ sec. cor. of sec. 5 only, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T44N R108W ----- 1/4 S 5 T43N R108W 2000</p>
	<p>Set an aluminum sign post alongside the iron post.</p>
78.98	<p>The cor. of secs. 5 and 6 only, T. 43 N., R. 108 W., monumented with a limestone, 12x12x5 ins., firmly set 6 ins. in the ground, plainly mkd. 5 notches on E. edge and 1 notch on W. edge, no other mks. visible.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T44N R108W S 32 ----- S 6   S 5 T43N R108W 2000</p>

Dependent Resurvey, Portion of the North Boundary,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

## CHAINS

from which the remains of the original bearing trees

A rotten stump, 12 ins. diam., bears S. 22° E.,  
5 lks. dist., with dead pine, 12 ins. diam., lying  
nearby, mkd. T43N R108W S5 BT on a partially healed  
blaze. (Record: S. 10° E., 6 lks.)

A dead pine, 14 ins. diam., bears N. 75° W., 50 lks.  
dist., with illegible scribing on open blaze.  
(Record: 53 lks.)

from which new bearing trees

A pine, 8 ins. diam., bears S. 26° E., 29 lks. dist.,  
mkd. T43N R108W S5 BT.

A pine, 12 ins. diam., bears S. 40° W., 15 lks.  
dist., mkd. T43N R108W S6 BT.

Bury the original cor. stone alongside the iron post.

From this point, the closing cor. of secs. 31 and 32, T. 44 N.,  
R. 108 W., bears N. 89° 28' W., 1.06 chs. dist., monumented with  
a limestone, 12x8x6 ins., firmly set, projecting 4 ins. above the  
ground, plainly mkd. 5 grooves on E. face and 1 groove on W.  
face, no other mks. visible, from which the remains of the  
original bearing tree

A rotten pine stump, 12 ins. diam., bears N. 14° E.,  
57 lks. dist., no mks. visible.

Did not remonument.

---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

---

(Restoring the dependent resurvey  
executed by Mark D. King in 1923)

---

From the ¼ sec. cor. of secs. 10 and 11, monumented with an iron  
post, 1 in. diam., firmly set, projecting 12 ins. above the  
ground, with brass cap mkd.

1/4  
S 10 | S 11  
1923

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>Cor. is located at intersection of buck rail fences extending E., W. and N.</p> <p>N. 0° 15' E., bet. secs. 10 and 11.</p> <p>Over mountainous terrain, along buck rail fence.</p>										
40.17	<p>The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T43N R108W</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 10</td><td>S 11</td></tr> <tr><td colspan="2" style="text-align: center;">1923</td></tr> </table>	T43N R108W		S 3	S 2			S 10	S 11	1923	
T43N R108W											
S 3	S 2										
S 10	S 11										
1923											
	<p>from which the 1923 bearing trees</p> <p style="padding-left: 40px;">A pine, 8 ins. diam., bears N. 22° E., 14 lks. dist., mkd. T43N R108W S2 BT.</p> <p style="padding-left: 40px;">A pine, 7 ins. diam., bears S. 24° E., 10 lks. dist., mkd. T43N R108W S11 BT.</p> <p style="padding-left: 40px;">A pine, 8 ins. diam., bears N. 68° W., 14 lks. dist., mkd. T43N R108W S3 BT.</p>										
	<p>Cor. is located in buck rail fence, extending N. and S.</p> <hr/>										
	<p>N. 0° 11' E., bet. secs. 2 and 3.</p> <p>Over mountainous terrain, along buck rail fence.</p>										
40.32	<p>The ¼ sec. cor. of secs. 2 and 3, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">1/4</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td colspan="2" style="text-align: center;">1923</td></tr> </table>	1/4		S 3	S 2			1923			
1/4											
S 3	S 2										
1923											
	<p>Cor. is located in buck rail fence extending N. and S.</p> <hr/>										
	<p>N. 3° 22' E., beginning new measurement.</p> <p>Over mountainous terrain, along buck rail fence.</p>										

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS						
44.31	<p>The cor. of secs. 2 and 3 only, on the N. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by Howard B. Carpenter and J. Frank Warner in 1891)</p> <hr/> <p>From the cor. of secs. 27, 28, 33 and 34, monumented with a granite stone, 16x14x10 ins., firmly set 8 ins. in the ground, plainly mkd. 3 grooves on E. face and 1 notch on S. face, in a mound of stone, 2 ft. base.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T43N R108W</td></tr> <tr><td>S 28   S 27</td></tr> <tr><td>-----</td></tr> <tr><td>S 33   S 34</td></tr> <tr><td>2000</td></tr> </table> <p>Deposit the original cor. stone in the mound of stone, alongside the iron post.</p> <p>Cor. is located in wire fence extending N. and S.</p> <p>N. 0° 18' E., bet. secs. 27 and 28.</p> <p>Over rolling terrain, along fence.</p>	T43N R108W	S 28   S 27	-----	S 33   S 34	2000
T43N R108W						
S 28   S 27						
-----						
S 33   S 34						
2000						
40.42	<p>Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T43N R108W</td></tr> <tr><td>1/4</td></tr> <tr><td>S 28   S 27</td></tr> <tr><td>2000</td></tr> </table> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 10 lks. E. of fence extending N. and S.</p>	T43N R108W	1/4	S 28   S 27	2000	
T43N R108W						
1/4						
S 28   S 27						
2000						
60.63	<p>Point for the N. 1/16 sec. cor. of secs. 27 and 28.</p>					

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T43N R108W N1/16 S 28   S 27 2000</p>
	Set a steel fence post alongside the iron post.
	Cor. is located 10 lks. E. of fence extending N. and S.
75.00	Intersection of fences extending N. (buck rail), S. (wire), and W. (buck rail).
80.84	Point for the cor. of secs. 21, 22, 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T43N R108W S 21   S 22 ----- S 28   S 27 2000</p>
	Set a steel fence post alongside the iron post.
	Cor. is located 25 lks. E. of buck rail fence extending N. and S.
	From this point, the cor. of secs. 22, 23, 26 and 27, bears N. 89° 42' E., 79.01 chs. dist., monumented with a sandstone, 16x14x12 ins., firmly set 8 ins. in the ground, dimly mkd. 2 notches on E. edge and 2 notches on S. edge, in a mound of stone, 3 ft. base.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T43N R108W S 22   S 23 ----- S 27   S 26 2000</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Bury the original cor. stone and set a steel fence post alongside the iron post.</p> <p>Set a steel fence post alongside the iron post.</p> <p>This control line was fully retraced and careful search was made for the intervening cor. which was not recovered.</p>
	<p>N. 0° 04' W., bet. secs. 21 and 22.</p> <p>Over rolling terrain.</p>
20.215	<p>Point for the S. 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W S1/16 S 21   S 22 2000</p> <p>Set a steel fence post alongside the iron post.</p>
40.43	<p>True point for the ¼ sec. cor. of secs. 21 and 22, at proportionate distance, falls in DuNoir Creek, 50 lks. wide, course S., where it is impracticable to establish a permanent monument.</p>
42.43	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 21 and 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">W C T43N R108W 1/4 S 21   S 22 ↓ 2000</p> <p>Set an aluminum sign post alongside the iron post.</p> <p>Witness cor. is located 95 lks. N. of left bank of the DuNoir Creek.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
80.86	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a granite stone, 10x8x6 ins., firmly set flush with the surface of the ground, plainly mkd. 3 grooves on E. face and 3 grooves on S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N</td><td>R108W</td></tr> <tr><td>S 16</td><td>S 15</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 21</td><td>S 22</td></tr> <tr><td colspan="2">2000</td></tr> </table> </div> <p>Bury the original cor. stone alongside the iron post.</p> <p>Cor. is located 30 lks. S. of DuNoir Creek, course NW.</p> <hr/>	T43N	R108W	S 16	S 15			S 21	S 22	2000	
T43N	R108W										
S 16	S 15										
S 21	S 22										
2000											
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 46' W., bet. secs. 28 and 33.</p> <p>Over rolling terrain.</p>										
39.22	<p>The ¼ sec. cor. of secs. 28 and 33, monumented with a granite stone, 14x12x8 ins., firmly set 8 ins. in the ground, plainly mkd. 1/4 on N. face, in a mound of stone, 1 ft. base.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N</td><td>R108W</td></tr> <tr><td>S 28</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 33</td><td></td></tr> <tr><td colspan="2">2000</td></tr> </table> </div> <p>Bury the original cor. stone and set a steel fence post alongside the iron post. Rebuild the mound of stone, 2 ft. base, 2 ft. high, N. of the cor.</p> <hr/>	T43N	R108W	S 28		1/4	—	S 33		2000	
T43N	R108W										
S 28											
1/4	—										
S 33											
2000											

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

<p>CHAINS</p> <p>40.15</p> <p>20.15</p> <p>15.00</p> <p>20.15</p>	<p>S. 88° 38' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>The cor. of secs. 28, 29, 32 and 33, remonumented by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N R108W</td></tr> <tr><td>29   28</td></tr> <tr><td>32   33</td></tr> <tr><td>1978</td></tr> <tr><td>NLS 523 LS</td></tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <hr/> <p>N. 0° 55' E. bet. secs. 28 and 29.</p> <p>Over rolling terrain.</p> <p>The S. 1/16 sec. cor. of secs. 28 and 29, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N R108W</td></tr> <tr><td>S 1/16</td></tr> <tr><td>S 29   S 28</td></tr> <tr><td>1977</td></tr> <tr><td>NLS 523 LS</td></tr> </table> </div> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>N. 0° 55' E., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>Cor. of buck rail fence, extending N. and W.; thence along fence.</p> <p>The ¼ sec. cor. of secs. 28 and 29, remonumented by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, with a mound of stone, 2 ft. base, 2 ft. high, W. of the cor., with brass cap mkd.</p>	T43N R108W	29   28	32   33	1978	NLS 523 LS	T43N R108W	S 1/16	S 29   S 28	1977	NLS 523 LS
T43N R108W											
29   28											
32   33											
1978											
NLS 523 LS											
T43N R108W											
S 1/16											
S 29   S 28											
1977											
NLS 523 LS											

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T43N R108W 1/4 S 29   S 28 1977 NLS 523 LS</p> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <p>Cor. is located 5 lks. W. of buck rail fence, extending N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 29' W., beginning new measurement.</p> <p>Over rolling terrain, along fence.</p>
20.13	<p>The N. 1/16 sec. cor. of secs. 28 and 29, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with a mound of stone, 2 ft. base, embedded in the ground, S. of the cor., with brass cap mkd.</p> <p style="text-align: center;">T43N R108W N1/16 S 29   S 28 1977 NLS 523 LS</p> <p>Cor. is located approximately S. 44° W., 33 lks. dist. from cor. of fences, extending E. and S.</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <p>Set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 29' W., beginning new measurement.</p> <p>Over mountainous terrain, through scattered pine timber.</p>
20.13	<p>The cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T43N R108W S 20   S 21 ----- S 29   S 28 1923</p> <p>from which the original bearing trees</p> <p style="padding-left: 40px;">A rotten pine stump, 12 ins. diam., bears N. 61° E., 7 lks. dist., no mks. visible.</p> <p style="padding-left: 40px;">A dead pine snag, 24 ins. diam., bears N. 38° E., 48 lks. dist., mkd. T43N R108W S21 BT on open blaze.</p> <p>from which the 1923 bearing trees</p> <p style="padding-left: 40px;">A pine, 12 ins. diam., bears N. 51° E., 24 lks. dist., with healed blaze.</p> <p style="padding-left: 40px;">A dead pine, 12 ins. diam., bears S. 45° E., 15 lks. dist., mkd. T43N R108W S28 BT, on open blaze.</p> <p style="padding-left: 40px;">A pine, 24 ins. diam., bears N. 8° W., 22 lks. dist., with healed blaze.</p>
19.80	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 89° 24' W., bet. secs. 21 and 28.</p> <p>Over mountainous terrain.</p> <p>Point for the E. 1/16 sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W S 21 E1/16----- S 28 2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in small patch of pine and aspen timber 1 ch. in diam.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.60	<p>The ¼ sec. cor. of secs. 21 and 28, monumented with a granite stone, 16x14x8 ins., firmly set 8 ins. in the ground, plainly mkd. 1/4 on N. face, in a mound of stone, 1 ft. base.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W S 21 1/4 ——— S 28 2000</p> <p>Bury the original cor. stone and set a steel fence post alongside the iron post. Raise a mound of stone, 2 ft. base, 2 ft. high, N. of the cor.</p> <p>Cor. is located at cor. of fences extending ESE. and S.</p> <p style="text-align: center;">—————</p> <p>S. 88° 35' W., beginning new measurement.</p> <p>Over mountainous terrain.</p>
39.82	<p>The cor. of secs. 20, 21, 28 and 29.</p> <hr/> <p style="text-align: center;">(Restoring the resurvey executed by Mark D. King in 1923)</p> <hr/> <p>N. 0° 01' W., bet. secs. 20 and 21.</p> <p>Over mountainous terrain, through pine timber.</p>
42.36	<p>The ¼ sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">1/4 S 20   S 21 1923</p> <p>from which the remains of the 1923 bearing trees</p> <p style="text-align: center;">A rotten pine stump, 12 ins. diam., bears S. 40° E., 8 lks. dist., with dead pine lying nearby, mkd. 1/4 S21 BT on open blaze.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>A pine stump, 10 ins. diam., bears N. 60° W., 8 lks. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 33' E., beginning new measurement.</p> <p>Over mountainous terrain, through pine timber.</p>										
40.02	<p>The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="1" style="border-collapse: collapse; margin: 0 auto;"> <tr> <td colspan="2" style="padding: 2px;">T43N R108W</td> </tr> <tr> <td style="padding: 2px;">S 17</td> <td style="padding: 2px;">S 16</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black; padding: 2px;">S 20</td> </tr> <tr> <td colspan="2" style="padding: 2px;">S 21</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1923</td> </tr> </table> </div> <p>from which the remains of the 1923 bearing trees</p> <p style="margin-left: 40px;">A stump hole, bears N. 17½° E., 51 lks. dist., with a pine, 14 ins. diam. lying nearby, mkd. T43N R108W S16 BT on an open blaze.</p> <p style="margin-left: 40px;">A stump hole, bears S. 4½° E., 46 lks. dist., with a pine, 14 ins. diam. lying nearby, mkd. T43N R108W S21 BT on an open blaze.</p> <p style="margin-left: 40px;">A stump hole, bears S. 50° W., 34 lks. dist., with a pine, 14 ins. diam. lying nearby, mkd. T43N R108W S20 BT on an open blaze.</p> <p style="margin-left: 40px;">A stump hole, bears N. 14° W., 34 lks. dist., with a pine, 14 ins. diam. lying nearby, mkd. T43N R108W S17 BT on an open blaze.</p> <p>Cor. is located S. 45° W., 28 lks. dist., from cor. of buck rail fences extending N. and E.</p> <hr style="width: 80%; margin: 10px auto;"/>	T43N R108W		S 17	S 16	S 20		S 21		1923	
T43N R108W											
S 17	S 16										
S 20											
S 21											
1923											
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 89° 56' W., bet. secs. 16 and 21.</p> <p>Over nearly level terrain.</p>										
6.25	DuNoir Creek, 50 lks. wide, course S.										
19.62	Point for the E. 1/16 sec. cor. of secs. 16 and 21.										

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R108W S 16 E1/16— S 21 2000</p>
	<p>Set an aluminum sign post alongside the iron post.</p>
25.00	<p>Intersection of fences extending NE. (wire), S. and W. (buck rail)</p>
39.24	<p>The ¼ sec. cor. of secs. 16 and 21, monumented with a limestone, 13x10x5 ins., firmly set 10 ins. in the ground, dimly mkd. 1/4 on N. face, in a mound of stone, 3 ft. base.</p>
	<p>At the corner point</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R108W S 16 1/4 — S 21 2000</p>
	<p>Bury the original cor. stone and set an aluminum sign post alongside the iron post. Rebuild the mound of stone, 3 ft. base, 2 ft. high, S. of the cor.</p>
	<p>Cor. is located 30 lks. N. of buck rail fence extending E. and W.</p>
	<p style="text-align: center;">_____</p> <p>N. 89° 54' W., beginning new measurement.</p>
	<p>Over mountainous terrain, along buck rail fence.</p>
39.73	<p>The cor. of secs. 16, 17, 20 and 21.</p>
	<p style="text-align: center;">_____</p> <p>N. 1° 02' W., bet. secs. 16 and 17.</p>
	<p>Over mountainous terrain, along buck rail fence, through pine timber.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS						
40.83	<p>The <math>\frac{1}{4}</math> sec. cor. of sec. 16 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1/4</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 16</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1923</td></tr> </table> </div> <p>Cor. is located in buck rail fence extending N. and S.</p> <hr style="width: 20%; margin: auto;"/> <p>N. <math>0^{\circ} 28' W.</math>, beginning new measurement.</p> <p>Over rolling terrain.</p>	1/4	S 16	1923		
1/4						
S 16						
1923						
1.24	<p>The <math>\frac{1}{4}</math> sec. cor. of sec. 17 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1/4</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 17</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1923</td></tr> </table> </div> <p>Cor. is located in buck rail fence extending N. and S.</p> <hr style="width: 20%; margin: auto;"/> <p>N. <math>0^{\circ} 11' E.</math>, beginning new measurement.</p> <p>Over mountainous terrain.</p>	1/4	S 17	1923		
1/4						
S 17						
1923						
39.06	<p>The cor. of secs. 9 and 16 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T43N R108W</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 9</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 17</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 16</td></tr> <tr><td>1923</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in buck rail fence extending N. and S.</p> <hr style="width: 80%; margin: auto;"/> <p>N. <math>0^{\circ} 04' E.</math>, on the W. bdy. of sec. 9.</p> <p>Over rolling terrain.</p>	T43N R108W	S 9	S 17	S 16	1923
T43N R108W						
S 9						
S 17						
S 16						
1923						

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS										
1.51	<p>The closing cor. of secs. 8 and 17, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R108W</p> <table style="margin: auto;"> <tr> <td style="padding-right: 5px;">S 8</td> <td style="border-left: 1px solid black; padding-left: 5px;"> </td> <td></td> </tr> <tr> <td style="padding-right: 5px;">CC</td> <td style="border-left: 1px solid black; padding-left: 5px;"> </td> <td style="padding-left: 5px;">S 9</td> </tr> <tr> <td style="padding-right: 5px;">S 17</td> <td style="border-left: 1px solid black; padding-left: 5px;"> </td> <td></td> </tr> </table> <p>1923</p> </div> <p>from which a bearing tree of unknown origin</p> <p style="padding-left: 40px;">An aspen, 6 ins. diam., bears N. 26° E., 30 lks. dist., with a bearing tree tag.</p> <p>from which the 1923 bearing trees</p> <p style="padding-left: 40px;">An aspen, 12 ins. diam., bears S. 62° W., 47 lks. dist., with a bearing tree tag and healed blaze. (Record: N. 51½ W.)</p> <p style="padding-left: 40px;">An aspen, 6 ins. diam., bears N. 63° E., 19 lks. dist., with a bearing tree tag and healed blaze.</p> <p>Cor. is located in buck rail fence extending N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 01' W., beginning new measurement.</p> <p>Over rolling terrain, along fence.</p>	S 8			CC		S 9	S 17		
S 8										
CC		S 9								
S 17										
38.77	<p>The ¼ sec. cor. of sec. 9 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr> <td style="padding-right: 5px;"> </td> <td style="padding-left: 5px;">1/4</td> </tr> <tr> <td style="padding-right: 5px;"> </td> <td style="padding-left: 5px;">S 9</td> </tr> <tr> <td style="padding-right: 5px;"> </td> <td style="padding-left: 5px;">1923</td> </tr> </table> </div> <p>Cor. is located in buck rail fence extending N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 06' W., beginning new measurement.</p> <p>Over rolling terrain along fence.</p>		1/4		S 9		1923			
	1/4									
	S 9									
	1923									
1.35	<p>The ¼ sec. cor. of sec. 8 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p>									

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS														
38.85	<div style="text-align: center;"> <table border="1"> <tr><td>1/4</td></tr> <tr><td>S 8</td></tr> <tr><td>1923</td></tr> </table> </div> <p>Cor. is located at intersection of buck rail fence extending S. and W., and wooden fence extending E.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 09' W., beginning new measurement.</p> <p>Over nearly level terrain, across hay meadow in valley floor.</p> <p>The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T43N R108W</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 8</td><td>S 9</td></tr> <tr><td colspan="2">1923</td></tr> </table> </div>	1/4	S 8	1923	T43N R108W		S 5	S 4	<hr/>		S 8	S 9	1923	
1/4														
S 8														
1923														
T43N R108W														
S 5	S 4													
<hr/>														
S 8	S 9													
1923														
37.73	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 86° 57' W., bet. secs. 29 and 32.</p> <p>Over rolling terrain.</p> <p>The ¼ sec. cor. of secs. 29 and 32, remonumented by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, with an iron post, 2½ ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>S 29</td></tr> <tr><td>1/4</td></tr> <tr><td>S 32</td></tr> <tr><td>1977</td></tr> <tr><td>NLS 523 LS</td></tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89° 26' W., beginning new measurement.</p> <p>Over rolling terrain.</p>	S 29	1/4	S 32	1977	NLS 523 LS								
S 29														
1/4														
S 32														
1977														
NLS 523 LS														

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
39.97	<p>The cor. of secs. 29, 30, 31 and 32, remonumented by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with a mound of stone, 3 ft. base, 3 ft. high, S. of the cor., with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N</td><td>R108W</td></tr> <tr><td>S 30</td><td>S 29</td></tr> <tr><td>S 31</td><td>S 32</td></tr> <tr><td colspan="2">1977</td></tr> <tr><td colspan="2">NLS 523 LS</td></tr> </table> </div> <p>Cor. is located at cor. of buck rail fence extending N. and W.</p> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p>	T43N	R108W	S 30	S 29	S 31	S 32	1977		NLS 523 LS	
T43N	R108W										
S 30	S 29										
S 31	S 32										
1977											
NLS 523 LS											
	<p>N. 89° 08' W., bet. secs. 30 and 31.</p> <p>Over rolling terrain, along fence.</p>										
39.34	<p>Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T43N</td><td>R108W</td></tr> <tr><td>S 30</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 31</td><td></td></tr> <tr><td colspan="2">2000</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 45 lks. N. of buck rail fence extending E. and W.</p>	T43N	R108W	S 30		1/4	—	S 31		2000	
T43N	R108W										
S 30											
1/4	—										
S 31											
2000											
75.49	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., remonumented by William H. Smith, Wyoming Registered Land Surveyor No. 470, with an iron post, 2½ ins. diam., firmly set, projecting 12 ins. above the ground, in a mound of stone, 2 ft. base, with brass cap mkd.</p>										

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<div style="text-align: center;"> <p>T43N R109W R108W S 25   S 30 ----- S 36   S 31 1971</p> </div> <p>from which the original bearing trees</p> <p>A pine stump, 6 ins. diam., bears N. 20° E., 22 lks. dist., no mks. visible.</p> <p>A rotten pine stump, 14 ins. diam., bears S. 85° W., 77 lks. dist., with rotten tree alongside, no mks. or blaze visible.</p> <p>A rotten pine stump, 6 ins. diam., bears N. 42° W., 24 lks. dist., with rotten tree alongside, mkd. T43N R109W S25 BT on partially healed blaze.</p> <p>Cor. is located N. 54° E., 5 lks. dist. from intersection of fences extending E., S. and W.</p> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <hr/> <p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 1° 17' W., bet. secs. 29 and 30.</p> <p>Over rolling terrain, along fence.</p>
19.55	<p>The S. 1/16 sec. cor. of secs. 29 and 30, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, 2½ ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R108W S1/16 S 30   S 29 1977 NLS 523 LS</p> </div> <p>Cor. is located S. 50° W., 60 lks. dist. from intersection of fences extending E., S. and NNW.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>N. 1° 17' W., beginning new measurement.</p> <p>Over mountainous terrain.</p> <p>5.00 Ascend steep S. slope.</p> <p>19.26 Top of ascent.</p> <p>19.56 The ¼ sec. cor. of secs. 29 and 30, reestablished by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W 1/4 S 30   S 29 1977 NLS 523 LS</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr/> <p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>N. 89° 56' W., bet. secs. 5 and 8.</p> <p>Over rolling terrain, along fence.</p> <p>19.99 The E. 1/16 sec. cor. of secs. 5 and 8, established by David L. Branham, Wyoming Registered Land Surveyor No. 560, monumented with an aluminum post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 2 ft. base, with a carsonite post alongside, with aluminum cap mkd.</p> <p style="text-align: center;">T43N R108W S 5 E1/16— S 8 1979</p> <p>Cor. is located at cor. of fences extending S. and W.</p>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
19.99	<p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 55' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>The ¼ sec. cor. of secs. 5 and 8, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with a steel sign post alongside, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>S 5</p> <p>1/4 ———</p> <p>S 8</p> <p>1923</p> </div> <p>from which bearing trees established by David L. Branham, Wyoming Registered Land Surveyor No. 560, in 1977.</p> <p style="margin-left: 40px;">A pine, 8 ins. diam., bears S. 9° E., 63 lks. dist., mkd. 1/4 S8 BT on open blaze.</p> <p style="margin-left: 40px;">A pine, 10 ins. diam., bears N. 42° W., 26 lks. dist., mkd. 1/4 S5 BT on open blaze.</p> <p style="margin-left: 40px;">The remains of one of the 1923 aspen bearing trees was found lying nearby, mkd. 1/4 S8 BT on partially healed blaze.</p> <p>This position is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located at cor. of fences extending N. and E.</p>
26.05	<hr/> <div style="text-align: center; margin: 10px 0;"> <p>Subdivision of Section 5, T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> </div> <hr/> <p>From the ¼ sec. cor. of secs. 5 and 8.</p> <p>N. 1° 19' E., on the N. and S. center line of sec. 5.</p> <p>Over mountainous terrain, along fence.</p> <p>Point selected for a witness point on the N. and S. center line of sec. 5.</p>

Subdivision of Section 5,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W P T43N R108W C   S 5 C 2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>Witness point is located 28 lks. E. of fence extending N. and S.</p> <p>26.55 Trail road, bears E. and W.</p> <p>82.69 The ¼ sec. cor. of sec. 5 only.</p> <hr/> <p style="text-align: center;">Subdivivision of Section 11 T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the ¼ sec. cor. of secs. 11 and 14, monumented with and iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">11 1/4— 14 1923</p> <p>from which an original bearing tree</p> <p style="padding-left: 40px;">A pine, 10 ins. diam., bears N. 66° W., 16 lks. dist., mkd, S11 1/4 BT on open blaze.</p> <p>from which the 1923 bearing</p> <p style="padding-left: 40px;">A pine, 16 ins. diam., bears N. 61° E., 6 lks. dist., with visible scribes on healed blaze. (Record: N. 40° E.)</p> <p style="padding-left: 40px;">A pine stump, bears S. 38° E., 15 lks. dist., tree is fallen, some mks. visible. (Record: S. 30° E.)</p> <p>Cor is located in the cor. of a buck rail fence, extending N. and S.</p>
--------	--

Subdivision of Section 11,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 2° 17' E., on the N. and S. center line of sec. 11.</p> <p>Over mountainous terrain.</p> <p>7.35 Six Mile Creek, 20 lks. wide, course WSW.</p> <p>38.90 Point for the center 1/4 sec. cor. of sec. 11, at the intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 2½ ins. diam., 28 ins. long, 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W</p> <p style="text-align: center;">C1/4 S 11</p> <p style="text-align: center;">2002</p> <p>Cor. is located S. 80° E., 53 lks. dist., from cor. of buck rail fence, extending S. and W.</p> <p>79.49 The 1/4 sec. cor. of secs. 2 and 11, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, N. of the cor., with brass cap mkd.</p> <p style="text-align: center;">S 2 1/4 ——— S 11 1923</p> <p>from which</p> <p style="padding-left: 40px;">A dead pine, 10 ins. diam., bears S. 34° E., 13 lks. dist., mkd. 1/4 S11 BT on open blaze. (Record: S. 8° E., 42 lks.)</p> <p style="padding-left: 40px;">A pine, 14 ins. diam., bears N. 22° W., mkd. 1/4 S2 BT. (Record: N. 5° W., 29 lks.)</p> <hr/> <p>From the 1/4 sec. cor. of secs. 11 and 12, determined by distance-distance intersect from the remains of the original bearing trees. It was determined that the bearings were switched in the original notes. This method of restoration was determined to be the most applicable to located the position of the original cor.</p>
--------	--

Subdivision of Section 11,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	At the corner point
	Set a stainless steel post, 2½ ins. diam., 28 ins. long, 26 ins. in the ground, with brass cap mkd.
	T43N R108W
	1/4
	S 11   S 12
	2002
	from which the 1923 bearing trees
	A dead pine, 16 ins. diam., lying down, bears
	N. 23¾° E., 31 lks. dist., mkd. 1/4 S12 BT on open
	blaze. (Record: S. 60° E., 31 lks.)
	A pine, 21 ins. diam., bears N. 62° W., 57 lks.
	dist., mkd. 1/4 on healed blaze. (Record: S. 10° W.,
	57 lks.)
	from which a new bearing tree
	A fir, 11 ins. diam., bears N. 74¾° E., 56 lks.
	dist., mkd. 1/4 S12 BT
	Cor. is located on steep NW. slope.
	N. 89° 18' W., on the E. and W. center line of sec. 11.
	Over mountainous terrain.
38.07	The center 1/4 sec. cor. of sec. 11, at intersection with the N. and S. center line of sec. 11.
38.60	Thence along buck rail fence.
76.61	The 1/4 sec. cor. of secs. 10 and 11.
	Subdivision of Section 21,
	T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming
	From the ¼ sec. cor. of secs. 21 and 28.
	N. 0° 11' E., on the N. and S. center line of sec. 21.
	Over mountainous terrain, through scattered pine and aspen timber.

Subdivision of Section 21,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
20.55	<p>Point for the center S. 1/16 sec. cor. of sec. 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W C S1/16   S 21 C 2000</p> <p>Set a steel fence post alongside the iron post.</p>
41.10	<p>Point for the center ¼ sec. cor. of sec. 21, at intersection with the E. and W. center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W  C 1/4 S 21  2000</p> <p>Set a steel fence post alongside the iron post.</p>
81.30	<p>The ¼ sec. cor. of secs. 16 and 21.</p> <hr/> <p>From the true point for the ¼ sec. cor. of secs. 21 and 22.</p> <p>N. 89° 37' W., on the E. and W. center line of sec. 21.</p> <p>Over mountainous terrain.</p>
19.71	<p>Point for the center E. 1/16 sec. cor. of sec. 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W E 1/16 C———C S 21 2000</p>

Subdivision of Section 21,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a steel fence post alongside the iron post.</p>
39.42	The center $\frac{1}{4}$ sec. cor. of sec. 21.
79.40	The $\frac{1}{4}$ sec. cor. of secs. 20 and 21.
	<hr/> <p>From the center E. <math>\frac{1}{16}</math> sec. cor. of sec. 21.</p> <p>N. <math>0^{\circ} 03' E.</math>, on the N. and S. center line of the NE<math>\frac{1}{4}</math> of sec. 21.</p> <p>Over mountainous terrain.</p>
40.32	The E. $\frac{1}{16}$ sec. cor. of secs. 16 and 21.
	<hr/> <p>From the E. <math>\frac{1}{16}</math> sec. cor. of secs. 21 and 28.</p> <p>N. <math>0^{\circ} 05' E.</math>, on the N. and S. center line of the SE<math>\frac{1}{4}</math> of sec. 21.</p> <p>Over mountainous terrain.</p>
20.38	<p>Point for the SE. <math>\frac{1}{16}</math> sec. cor. of sec. 21, at intersection with the E. and W. center line of the SE<math>\frac{1}{4}</math>.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W</p> <p style="text-align: center;">SE <math>\frac{1}{16}</math> S 21</p> <p style="text-align: center;">2000</p>
	<p>Set a steel fence post alongside the iron post.</p>
40.77	The center E. $\frac{1}{16}$ of sec. 21.
	<hr/> <p>From the S. <math>\frac{1}{16}</math> sec. cor. of secs. 21 and 22.</p> <p>S. <math>89^{\circ} 53' W.</math>, on the E. and W. center line of the SE<math>\frac{1}{4}</math> of sec. 21.</p> <p>Over mountainous terrain.</p>
19.75	The SE. $\frac{1}{16}$ of sec. 21.

Subdivision of Section 21,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.50	<p>The center S. 1/16 sec. cor. of sec. 21.</p> <hr/> <p style="text-align: center;">Subdivision of Section 28, T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the ¼ sec. cor. of secs. 28 and 33.</p> <p>NORTH, on the N. and S. center line of sec. 28.</p> <p>Over rolling terrain.</p>
39.96	<p>Point for the center ¼ sec. cor. of sec. 28, at intersection with the E. and W. center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W</p> <p style="text-align: center;">C 1/4 S 28</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside the iron post.</p>
60.28	<p>Point for the center N. 1/16 sec. cor. of sec. 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W</p> <p style="text-align: center;">C</p> <p style="text-align: center;">N1/16   S 28</p> <p style="text-align: center;">C</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 76 lks. E. of cor. of fences extending N. and W.</p>
80.60	<p>The ¼ sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the ¼ sec. cor. of secs. 27 and 28.</p> <p>S. 89° 06' W., on the E. and W. center line of sec. 28.</p>

Subdivision of Section 28,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over rolling terrain.
19.71	Point for the center E. 1/16 sec. cor. of sec. 28.  Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.  <div style="text-align: center;">           T43N R108W            E1/16            C————C            S 28            2000         </div>
	Set a steel fence post alongside the iron post.
39.42	The center ¼ sec. cor. of sec. 28.
78.92	The ¼ sec. cor. of secs. 28 and 29.
	<hr/> From the center E. 1/16 sec. cor. of sec. 28.  N. 0° 08' E., on the N. and S. center line of the NE¼ of sec. 28.  Over rolling terrain.
20.27	Point for the NE. 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the NE¼.  Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.  <div style="text-align: center;">           T43N R108W             NE1/16 S 28             2000         </div>
	Set a steel fence post alongside the iron post.
40.53	The E. 1/16 sec. cor. of secs. 21 and 28.
	<hr/> From the N. 1/16 sec. cor. of secs. 27 and 28.  S. 89° 16' W., on the E. and W. center line of the NE¼ of sec. 28.

Subdivision of Section 28,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Over rolling terrain.</p> <p>19.75 The NE. 1/16 sec. cor. of sec. 28.</p> <p>39.51 The center N. 1/16 sec. cor. of sec. 28.</p> <hr/> <p>From the center N. 1/16 sec. cor. of sec 28.</p> <p>S. 88° 50' W., on the E. and W. center line of the NW¼ of sec. 28.</p> <p>Over rolling terrain.</p> <p>0.76 Cor. of fences, extending N. and W.; thence along fence.</p> <p>39.67 The N. 1/16 sec. cor. of secs. 28 and 29.</p> <hr/> <p style="text-align: center;">Subdivision of Section 29, T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the ¼ sec. cor. of secs. 29 and 32.</p> <p>N. 1° 05' W., on the N. and S. center line of sec. 29.</p> <p>Over rolling terrain.</p> <p>19.45 Point for the center S. 1/16 sec. cor. of sec. 29.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a small mound of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W C S1/16   S 29 C 2000</p> <p>38.90 The center ¼ sec. cor. of sec. 29, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an aluminum post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T43N R108W C 1/4 S 29 1977 NLS 523 LS</p>
--------	---

Subdivision of Section 29,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/>
	<p>From the <math>\frac{1}{4}</math> sec. cor. of secs. 28 and 29.</p>
	<p>N. <math>89^{\circ} 08' W.</math>, on the E. and W. center line of sec. 29.</p>
	<p>Over rolling terrain.</p>
19.525	<p>The center E. <math>\frac{1}{16}</math> sec. cor. of sec. 29, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, <math>2\frac{1}{2}</math> ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R108W E 1/16 C———C S 29 1977 NLS 523 LS</p>
	<p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/>
	<p>N. <math>89^{\circ} 08' W.</math>, beginning new measurement.</p>
	<p>Over rolling terrain.</p>
19.525	<p>The center <math>\frac{1}{4}</math> sec. cor. of sec. 29.</p>
39.58	<p>The center W. <math>\frac{1}{16}</math> sec. cor. of sec. 29, established by Norman L. Smith, Wyoming Registered Land Surveyor No. 523, monumented with an iron post, <math>2\frac{1}{2}</math> ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R108W W 1/16 C———C S 29 1977 NLS 523 LS</p>
	<p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/>

Subdivision of Section 29,  
T. 43 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 89° 08' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>20.055 The ¼ sec. cor. of secs. 29 and 30.</p> <hr/> <p>From the S. 1/16 sec. cor. of secs. 28 and 29.</p> <p>N. 88° 03' W., on the E. and W. center line of the SE¼ of sec. 29.</p> <p>Over rolling terrain.</p> <p>38.39 The center S. 1/16 sec. cor. of sec. 29.</p> <hr/> <p>N. 89° 18' W., on the E. and W. center line of sec. 29.</p> <p>Over rolling terrain.</p> <p>40.04 The S. 1/16 sec. cor. of secs. 29 and 30.</p> <hr/>
	<p>GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in the northwest portion of Fremont County, approximately 15 miles northwest of Dubois, Wyoming. The terrain varies from nearly level in the valley floor to mountainous in the timbered areas. The average elevation is about 8,000 feet above sea level. The soil varies from sandy loam to rocky. Vegetation consists of native grasses and sagebrush with timber consisting of pine and aspen.</p> <p>Drainage of the area is by DuNoir Creek which runs southerly through the middle of the area.</p> <p>Access is provided by U. S. Highway No. 26, Forest Service Road 513, a private road following Dunoir Creek and by numerous other roads and trails in the area. The area is inhabited by numerous homes and ranches in the valley floor. There was no evidence of mineral activity at the time of the survey.</p>



## CERTIFICATE OF SURVEY

I, Lynn A. Forbes, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 27th day of June, 2000, I have dependently resurveyed a portion of the north boundary, a portion of the subdivisional lines, and the subdivided certain sections, Township 43 North, Range 108 West, of the Sixth Principal Meridian, Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

DEC 05 2003

---

 (Date)




---

 (Cadastral Surveyor)

## CERTIFICATE OF APPROVAL


 BUREAU OF LAND MANAGEMENT  
 Cheyenne, Wyoming

The foregoing field notes of dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines, and the subdivision of certain sections, Township 43 North, Range 108 West, of the Sixth Principal Meridian, Wyoming, executed by Lynn A. Forbes, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 05 2003

---

 (Date)

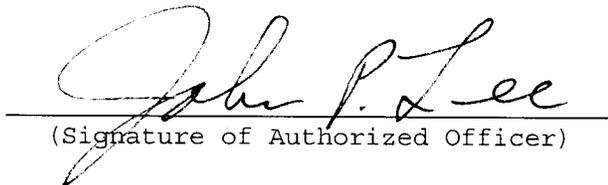


---

 (Signature of Authorized Officer)