


TOWNSHIP 18 NORTH, RANGE 95 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

CORRECTIVE DEPENDENT RESURVEY

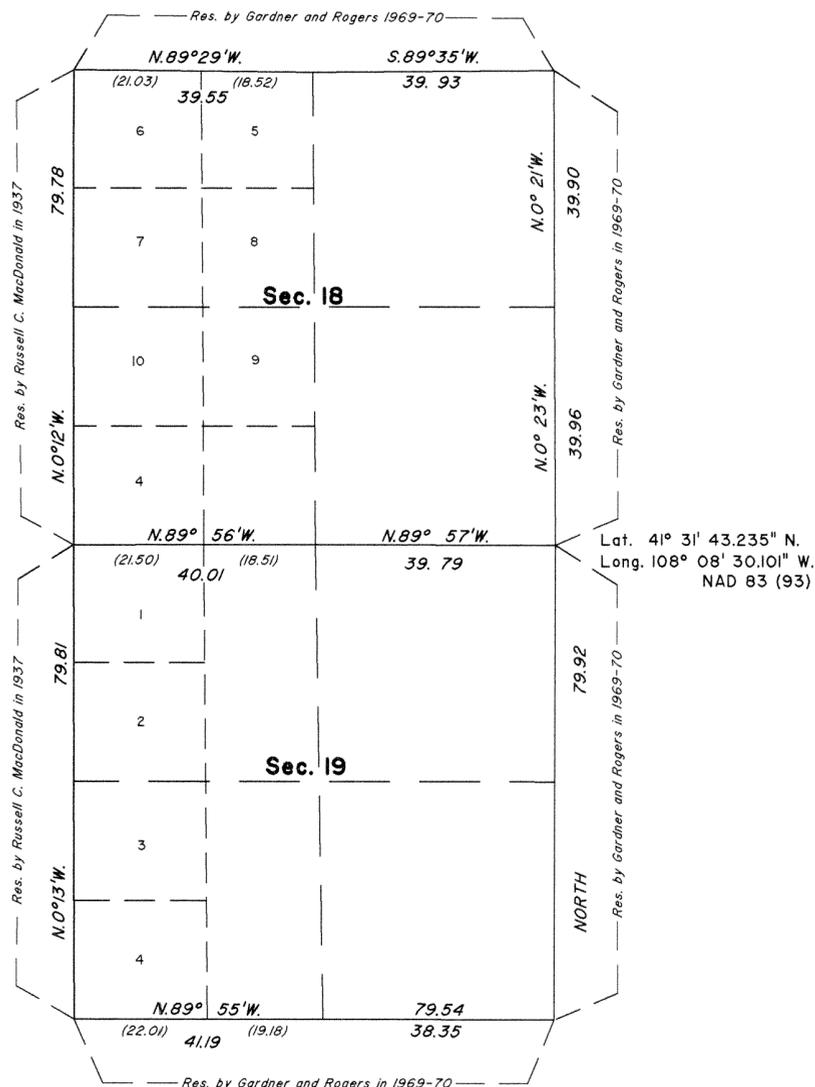

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the corrective dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, Township 18 North, Range 95 West, Sixth Principal Meridian, Wyoming.

Charles J. Reed surveyed the west boundary in 1875. Mortimer N. Grant surveyed the subdivisional lines in 1882. Russell C. MacDonald dependently resurveyed the west boundary in 1937. Wayne M. Gardner and Frank W. Rogers dependently resurveyed a portion of the subdivisional lines in 1969-70.

The position of the 1/4 sec. cor. of secs. 18 and 19, was purported as not conforming to the official record by Vic Wire of D. R. Griffin and Associates, Rock Springs, Wyoming. A field investigation substantiated the purported findings, and recovered the original 1882 stone monument which was overlooked during the 1969-70 dependent resurvey. This corrective dependent resurvey as shown hereon corrects the 1969-70 dependent resurvey.


Lottings and areas are as shown on the plats approved September 18, 1883, and July 11, 1973.

Measurements were made using Global Positioning System (GPS) TRIMBLE Model 4700 receivers and by chaining methods. The instruments were maintained in proper adjustment at all times. The direction of all lines refer to the true meridian. The directions, distances and geographic positions were determined by GPS observations.

I, Lynn A. Forbes, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions dated July 10, 2002, and Assignment Instructions dated July 10, 2002, for Group Number 704, Wyoming, I have corrected the dependent resurvey of a portion of the subdivisional lines Township 18 North, Range 95 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Field assistants were Sonja S. Sparks, Land Surveyor (Student Trainee), John K. Russell, and Eric J. Willcox, Surveying Technicians. Survey executed July 11, 2002, and has been made in strict conformity with the special instructions, the Manual of Surveying Instructions for the Survey for the Public Lands of the United States, 1973, and in the specific manner described hereon.

Lynn A. Forbes
Cadastral Surveyor

March 12, 2004
Date

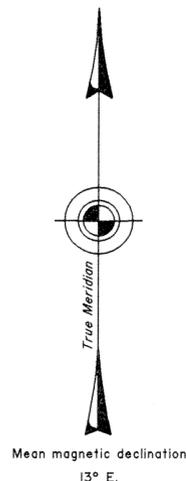

The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 9 ins. above the ground, with a mound of stone, 2 ft. base 1 1/2 ft. high, W. of the cor., with brass cap mkd.

T18N	
R96W	R95W
S 13	S 18
S 24	S 19
1937	

Cor. is located in fence on E. side of dirt road, both extending N. and S.

The 1/4 cor. of secs. 18 and 19, monumented with a broken sandstone, 8x6x2 ins., firmly set 6 ins. in the ground, dimly mkd. 1/4 on N. face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T18N	R95W
S 18	
1/4	
S 19	
2002	

Bury the original cor. stone and set a steel fence post alongside the stainless steel post.

From this point, the erroneous position for the 1/4 sec. cor. of secs. 18 and 19, as reestablished during the 1969-70 dependent resurvey, bears N. 89° 36' W. 1.36 chs. dist., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T18N R95W 1/4 S18 S19 1970, with a steel fence post alongside. Add the mks., AM on the brass cap and bury the iron post in place, 6 ins. below the surface of the ground, and remove the steel fence post.

The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, in a fence extending N. and S., with a steel fence post alongside, with brass cap mkd.

T18N	R95W
S 18	S 17
S 19	S 20
1969	

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming March 12, 2004

This plat representing the entire record of this survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director
John P. Lee
Chief Cadastral Surveyor for Wyoming

