

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

FOURTEENTH STANDARD PARALLEL NORTH, THROUGH RANGE 74 WEST,

THE SOUTH BOUNDARY

AND

THE SUBDIVISIONAL LINES,

TOWNSHIP 56 NORTH, RANGE 74 WEST,

OF THE SIXTH PRINCIPAL MERIDIAN,

IN THE STATE OF WYOMING.

EXECUTED BY

JOEL T. EBNER

CADASTRAL SURVEYOR

Under Special Instructions dated FEBRUARY 26, 2001, approved FEBRUARY 26, 2001, which provided for the surveys included under Group Number 686, and assignment instructions dated FEBRUARY 26, 2001.

Survey commenced AUGUST 6, 2001

Survey completed JUNE 19, 2002

INDEX DIAGRAM

Township 56 North, Range 74 West

<i>FOURTEENTH</i>	<i>STANDARD</i>	<i>PARALLEL</i>	<i>NORTH</i>
10	8	7	6 5 4 3 2
6 72	73 5 72	57 4 57	47 3 47
			35 2 35
			26 1 25
7 69	70 8 69	55 9 55	46 10 45
			34 11 34
			24 12 23
18 66	67 17 65	54 16 53	44 15 43
			33 14 32
			22 13 22
19 63	64 20 62	53 21 52	42 22 42
			31 23 30
			21 24 20
30 61	62 29 60	51 28 50	40 27 40
			29 26 29
			19 25 18
31 16	59 32 15	49 33 14	38 34 13
			28 35 12
			17 36 11

T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains</p>	<p>The following field notes are those of the dependent resurvey of the Fourteenth Standard Parallel North, through Range 74 West, the south boundary and the subdivisional lines, Township 56 North, Range 74 West, of the Sixth Principal Meridian, Wyoming.</p> <p>Mortimer N. Grant surveyed the Fourteenth Standard Parallel North (north boundary), the remaining exterior boundaries and the subdivisional lines in 1883. Charles Holcomb retraced the west boundary and a portion of the north boundary in 1883. Wiliam H. Clark performed a retracement and restoration of the Fourteenth Standard Parallel North in 1917. Mark M. Kelley dependently resurveyed the south boundary in 1917. Mark D. King dependently resurveyed the east boundary in 1922. Richard A. Kohler dependently resurveyed the west boundary in 2002. Joel T. Ebner dependently resurveyed the east boundary during the resurvey of T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>Numerous local surveys have been conducted in the area and acceptance of these surveys is detailed herein.</p> <p>The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 686, Wyoming, dated February 26, 2001.</p> <p>Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data were thoroughly verified and only true line field notes are given herein, which refer to the completed survey.</p> <p>The survey was executed with TRIMBLE Model 4700 Global Positioning System (GPS) receivers and by chaining methods. The instruments were maintained in proper adjustment at all times. The directions of all lines refer to the true meridian as determined by GPS observations. GPS control network and supporting data are contained in the official group file.</p> <p>The geographic position of the southeast corner of township based on NAD 83 (1993) and determined by Global Positioning Methods is:</p> <p>Latitude 44° 46' 55.10" N., Longitude 105° 41' 53.61" W.</p>
----------------------	--

T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains</p>	<p>The mean magnetic declination is $13\frac{1}{2}^{\circ}$ E.</p> <hr/> <p>Dependent Resurvey of the Fourteenth Standard Parallel North, Through Range 74 West, Sixth Principal Meridian, Wyoming</p> <hr/> <p>(Restoring the retracement and restoration executed by William H. Clark in 1917)</p> <hr/> <p>Beginning at the angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 31, T. 57 N., R. 73 W., monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T57N R73W AP ----- 1917</p> <p>S. $89^{\circ} 22'$ W., on the S. bdy. of sec. 36, T. 57 N., R. 74 W.</p> <p>Over gently rolling terrain.</p> <p>3.63 The closing cor. of Tps. 56 N., Rs. 73 and 74 W., identical with Cor. No. 2, Tract 57, T. 56 N., R. 73 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 5 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T57N R74W AP ----- T56N 1917</p> <p>with another iron post, 3 ins. diam., firmly set alongside, projecting 5 ins. above the ground, in a collar of stone, with brass cap mkd.</p>
----------------------	--

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains																															
4.92	<div style="text-align: center;"> <table border="0"> <tr><td>T57N</td><td>R74W</td></tr> <tr><td>S</td><td>36</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S</td><td>1</td></tr> <tr><td>R74W</td><td>R73W</td></tr> <tr><td colspan="2">T56N</td></tr> <tr><td colspan="2">CC</td></tr> <tr><td colspan="2">1922</td></tr> </table> </div> <p>Cor. No. 3, Tract 45, T. 57 N., R. 74 W., identical with Cor. No. 2, Tract 62, T. 57 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T57N</td><td>R74W</td></tr> <tr><td>TR</td><td>62</td></tr> <tr><td>2</td><td>3</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S</td><td>1</td></tr> <tr><td colspan="2">T56N</td></tr> <tr><td colspan="2">1917</td></tr> </table> </div> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 31' W., beginning new measurement.</p> <p>Over gently rolling terrain.</p>	T57N	R74W	S	36	<hr/>		S	1	R74W	R73W	T56N		CC		1922		T57N	R74W	TR	62	2	3	<hr/>		S	1	T56N		1917	
T57N	R74W																														
S	36																														
<hr/>																															
S	1																														
R74W	R73W																														
T56N																															
CC																															
1922																															
T57N	R74W																														
TR	62																														
2	3																														
<hr/>																															
S	1																														
T56N																															
1917																															
19.98	<p>Point for Cor. No. 2, Tract 56, T. 57 N., R. 74 W., identical with Cor. No. 3, Tract 62, T. 57 N., R. 74 W., at proportionate distance, falls in cultivated field, there is no remaining evidence of the 1917 cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T57N</td><td>R74W</td></tr> <tr><td>TR</td><td>56</td></tr> <tr><td>2</td><td>3</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S</td><td>1</td></tr> <tr><td colspan="2">T56N R74W</td></tr> <tr><td colspan="2">2001</td></tr> </table> </div>	T57N	R74W	TR	56	2	3	<hr/>		S	1	T56N R74W		2001																	
T57N	R74W																														
TR	56																														
2	3																														
<hr/>																															
S	1																														
T56N R74W																															
2001																															
34.68	<p>Bitter Creek, course NNE.</p>																														

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
35.69	<p>The angle point marking the restored position of the original standard cor. of Tps. 57 N., Rs. 73 and 74 W., monumented with an iron post, 2 ins. diam., firmly set, 6 ins. below the surface of the ground, in trail road extending NNE. and SSW., with brass cap mkd.</p> <div style="text-align: center;"> <p>T57N R74W AP</p> <hr style="width: 10%; margin: 0 auto;"/> <p>T56N 1917</p> </div> <hr style="border: 0.5px solid black; margin-top: 20px;"/> <p>S. 89° 42' W., on the S. bdy. of sec. 36, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
2.99	Point for the 1/4 sec. cor. of sec. 1 only, T. 56 N., R. 74 W., hereinafter described.
34.36	<p>From this point, the closing cor. of secs. 35 and 36, T. 57 N., R. 74 W., bears NORTH, 10 lks. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 13 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, N. of the cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>T57N R74W S 35 S 36 C C</p> <hr style="width: 10%; margin: 0 auto;"/> <p>T56N 1917</p> </div>
40.45	<p>The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 36, T. 57 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with a mound of stone, 3 ft. base, 1 ft. high, N. of the cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>T57N R74W AP</p> <hr style="width: 10%; margin: 0 auto;"/> <p>1917</p> </div> <hr style="border: 0.5px solid black; margin-top: 20px;"/>

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
	<p>S. 89° 06' W., beginning new measurement, on the S. bdy. of sec. 35, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
3.47	Point for the closing cor. of secs. 1 and 2, T. 56 N., R. 74 W., hereinafter described.
23.77	Point for the E. 1/16 sec. cor. of sec. 2 only, T. 56 N., R. 74 W., hereinafter described.
23.84	<p>Point for Cor. No. 3, Tract 56, T. 57 N., R. 74 W., at proportionate distance, falls on steep W. slope; found the 1917 iron post lying loose nearby.</p> <p>Re-set the 1917 iron post, 36 ins. long, 1 in. diam., 32 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-left: 100px;"> <p>T57N R74W S 35 TR 56 3 T56N 1917</p> </div>
39.85	<p>The angle point marking the restored position of the original standard cor. of secs. 35 and 36, T. 57 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, N. of the cor., with brass cap mkd.</p> <div style="text-align: center; margin-left: 100px;"> <p>T57N R74W AP ----- 1917</p> </div>
	<p>S. 88° 02' W., on the S. bdy. of sec. 35, T. 57 N., R. 74 W.</p> <p>Over gently rolling terrain.</p>
4.22	Point for the 1/4 sec. cor. of sec. 2 only, T. 56 N., R. 74 W., hereinafter described.
34.21	From this point, the closing cor. of secs. 34 and 35, T. 57 N., R. 74 W., bears SOUTH, 4 lks. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
	<div style="text-align: center;"> T57N R74W S 34 S 35 C C <hr style="width: 100%;"/> T56N 1917 </div>
38.99	<p>The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 35, T. 57 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with a boulder 8x4x2 ft. alongside, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> T57N R74W AP <hr style="width: 100%;"/> 1917 </div> <hr style="width: 50%; margin: 20px auto;"/> <p>S. 88° 00' W., beginning new measurement, on the S. bdy. of sec. 34, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
5.84	<p>Point for the closing cor. of secs. 2 and 3, T. 56 N., R. 74 W., hereinafter described.</p>
39.09	<p>The angle point marking the restored position of the original standard cor. of secs. 34 and 35, T. 57 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, N. of the cor., with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> T57N R74W AP <hr style="width: 100%;"/> 1917 </div> <hr style="width: 50%; margin: 20px auto;"/> <p>S. 88° 01' W., on the S. bdy. of sec. 34, T. 57 N., R. 74 W.</p> <p>Over gently rolling terrain.</p>
7.42	<p>Point for the 1/4 sec. cor. of sec. 3 only, T. 56 N., R. 74 W., hereinafter described.</p>

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
36.64	<p>From this point, the closing cor. of secs. 33 and 34, T. 57 N., R. 74 W., bears SOUTH, 2 lks. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, in a collar of stone, with brass cap mkd.</p>
	$\begin{array}{c} \text{T57N} \\ \text{R74W} \\ \text{S } 33 \mid \text{S } 34 \\ \text{C} \mid \text{C} \\ \hline \text{T56N} \\ 1917 \end{array}$
39.03	<p>The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 34, T. 57 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with a mound of stone, 3 ft. base, 1 ft. high, N. of the cor., with brass cap mkd.</p>
	$\begin{array}{c} \text{T57N R74W} \\ \text{AP} \\ \hline 1917 \end{array}$
	<hr/> <p>S. 88° 00' W., beginning new measurement, on the S. bdy. of sec. 33, T. 57 N., R. 74 W.</p>
	<p>Over rolling terrain.</p>
9.06	<p>Point for the closing cor. of secs. 3 and 4, T. 56 N., R. 74 W., hereinafter described.</p>
29.29	<p>Point for the E. 1/16 sec. cor. of sec. 4 only, T. 56 N., R. 74 W., hereinafter described.</p>
39.00	<p>The angle point marking the restored position of the original standard cor. of secs. 33 and 34, T. 57 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 17 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p>
	$\begin{array}{c} \text{T57N R74W} \\ \text{AP} \\ \hline 1917 \end{array}$ <hr/>

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains																						
	S. 87° 59' W., on the S. bdy. of sec. 33, T. 57 N., R. 74 W.																					
	Over gently rolling terrain.																					
10.52	Point for the 1/4 sec. cor. of sec. 4 only, T. 56 N., R. 74 W., hereinafter described.																					
38.48	From this point, the closing cor. of secs. 32 and 33, T. 57 N., R. 74 W., bears NORTH, 1 lk. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 9 ins. above the ground, at cor. of abandoned fences extending N., S. and W., with brass cap mkd.																					
	<table style="margin: auto;"> <tr><td></td><td>T57N</td><td></td></tr> <tr><td></td><td>R74W</td><td></td></tr> <tr><td>S 32</td><td> </td><td>S 33</td></tr> <tr><td>C</td><td> </td><td>C</td></tr> <tr><td colspan="3" style="border-top: 1px solid black;"></td></tr> <tr><td></td><td>T56N</td><td></td></tr> <tr><td></td><td>1917</td><td></td></tr> </table>		T57N			R74W		S 32		S 33	C		C					T56N			1917	
	T57N																					
	R74W																					
S 32		S 33																				
C		C																				
	T56N																					
	1917																					
39.01	The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 33, T. 57 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, with brass cap mkd.																					
	<table style="margin: auto;"> <tr><td>T57N</td><td>R74W</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">AP</td></tr> <tr><td colspan="2">1917</td></tr> </table> <hr style="width: 50%; margin: 10px auto;"/>	T57N	R74W	AP		1917																
T57N	R74W																					
AP																						
1917																						
	S. 88° 04' W., beginning new measurement, on the S. bdy. of sec. 32, T. 57 N., R. 74 W.																					
	Over rolling terrain.																					
11.97	Point for the closing cor. of secs. 4 and 5, T. 56 N., R. 74 W., hereinafter described.																					
39.08	The angle point marking the restored position of the original standard cor. of secs. 32 and 33, T. 57 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, in abandoned fence extending E. and W, with brass cap mkd.																					

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
	<div style="text-align: center;"> T57N R74W <hr style="width: 10%; margin: auto;"/> AP <hr style="width: 10%; margin: auto;"/> 1917 </div>
	<p>S. 87° 56' W., on the S. bdy. of sec. 32, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
13.62	<p>Point for the 1/4 sec. cor. of sec. 5 only, T. 56 N., R. 74 W., hereinafter described.</p>
39.00	<p>The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 32, T. 57 N., R. 74 W., monumented with an iron post, firmly set flush with the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> T57N R74W <hr style="width: 10%; margin: auto;"/> AP <hr style="width: 10%; margin: auto;"/> 1917 </div>
	<p>S. 87° 57' W., beginning new measurement, on the S. bdy. of sec. 32, T. 57 N., R. 74 W.</p> <p>Over gently rolling terrain.</p>
1.59	<p>From this point, the witness cor. to the closing cor. of secs. 31 and 32, T. 57 N., R. 74 W., bears NORTH, 1.05 chs. dist., remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, with aluminum cap mkd.</p>
	<div style="text-align: center;"> RUMPH SURVEYS T57N R74W S 31 S 32 <hr style="width: 10%; margin: auto;"/> C C <hr style="width: 10%; margin: auto;"/> WC PLS 538 1987 GILLETTE WYOMING </div>
15.35	<p>Point for the closing cor. of secs. 5 and 6, T. 56 N., R. 74 W., hereinafter described.</p>

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
38.99	<p>The angle point marking the restored position of the original standard cor. of secs. 31 and 32, T. 57 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T57N R74W AP ----- 1917</p> </div> <hr/> <p>S. 88° 00' W., on the S. bdy. of sec. 31, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
17.22	Point for the 1/4 sec. cor. of sec. 6 only, T. 56 N., R. 74 W., hereinafter described.
37.65	Point for the W. 1/16 sec. cor. of sec. 6 only, T. 56 N., R. 74 W., hereinafter described.
38.96	<p>The angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 31, T. 57 N., R. 74 W., monumented with an iron post, firmly set, projecting 7 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T57N R74W AP ----- 1917</p> </div> <hr/> <p>S. 89° 54' W., beginning new measurement, on the S. bdy. of sec. 31, T. 57 N., R. 74 W.</p> <p>Over rolling terrain.</p>
3.68	From this point, the closing cor. of Tps. 57 N., Rs. 74 and 75 W., bears NORTH, 2 lks. dist., monumented with an iron post, 3 ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap mkd.

Dependent Resurvey of the Fourteenth Standard Parallel North,
Through Range 74 West, Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T57N R75W R74W C C <u>S 36 S 31</u> S 1 T56N R75W 1917</p>
16.88	<p>The closing cor. of Tps. 56 N., Rs. 74 and 75 W., monumented with a stainless steel post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.</p>
	<p style="text-align: center;">Dependent Resurvey of the South Boundary, T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming</p>
	<p style="text-align: center;">(Restoring the Dependent Resurvey executed by Mark D. Kelley in 1917)</p>
	<p>From the cor. of Tps. 56 N., Rs. 73 and 74 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 4 ins. above the ground with brass cap mkd.</p> <p style="text-align: center;">T56N R73W <u>S 36 S 31</u> S 1 T55N R74W 1917</p> <p>Cor. is located 8 lks. N. of fence extending E. and W. and 64 lks. S. of road, scoria surfaced, extending E. and W.</p> <p>N. 89° 20' W., on the S. bdy. of sec. 36.</p> <p>Over rolling terrain.</p>
40.66	<p>The 1/4 sec. cor. of sec. 36 only, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, at intersection of fences extending E., S. and W., with brass cap mkd.</p>

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">S 36 1/4 ——— 1917</p> <hr style="width: 50%; margin: auto;"/>
	<p>S. 89° 14' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
40.09	<p>The cor. of secs. 35 and 36 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, at intersection of fences extending N., E. and W., with brass cap mkd.</p> <p style="text-align: center;">T56N R74W <u>S 35 S 36</u> T55N 1917</p> <hr style="width: 50%; margin: auto;"/>
	<p>S. 89° 16' W., on the S. bdy. of sec. 35.</p> <p>Over rolling terrain.</p>
9.90	<p>From this point, the closing cor. of secs. 1 and 2, bears NORTH, 4 lks. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 17 ins. above the ground, at intersection of fences extending E., S. and W., with brass cap mkd.</p> <p style="text-align: center;">T56N R74W <u>S 2 S 1</u> CC T55N 1917</p>
39.90	<p>The 1/4 sec. cor. of sec. 35 only, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, at intersection of fences extending N., E. and W., with brass cap mkd.</p>

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">S 35 1/4 ——— 1917</p> <hr/>
	<p>S. 89° 10' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
1.92	SA Creek, course NW.
39.94	<p>The cor. of secs. 34 and 35 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above the ground, in fence extending E. and W., with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W <u>S 34 S 35</u> T55N 1917</p> <hr/>
	<p>S. 89° 12' W., on the S. bdy. of sec. 34.</p> <p>Over rolling terrain.</p>
10.13	<p>The closing cor. of secs. 2 and 3, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, in fence extending E. and W., with a mound of stone, 3 ft. base, 1 ft., high, S. of the cor., with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W <u>S 3 S 2</u> CC T55N 1917</p>
40.47	<p>Point for the 1/4 sec. cor. of sec. 34 only, at proportionate distance, there is no remaining evidence of the 1917 cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W 1/4 S 34 <hr style="width: 10%; margin: auto;"/> T55N R74W 2001
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located in fence extending E. and W., and 9 lks. E. of Lynde Creek, course NNW.</p>
80.94	<p>The cor. of secs. 33 and 34 only, identical with Cor. No. 1, Tract 73, T. 55 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, at cor. of fences extending S. and W., with brass cap mkd.</p> <div style="text-align: center;"> T56N R74W S 33 S 34 <hr style="width: 10%; margin: auto;"/> T55N 1917 </div>
	<p>S. 89° 09' W., on the S. bdy. of sec. 33.</p> <p>Over rolling terrain.</p>
8.90	<p>The closing cor. of secs. 3 and 4, monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, in fence extending E. and W., with brass cap mkd.</p> <div style="text-align: center;"> T56N R74W <hr style="width: 10%; margin: auto;"/> S 4 S 3 CC T55N 1917 </div>
40.44	<p>The 1/4 sec. cor. of sec. 33 only, identical with Cor. No. 6, Tract 73, T. 55 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, at cor. of fences extending E. and WSW., with brass cap mkd.</p>

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
40.42	<div style="text-align: center;"> <p>S 33 1/4 _____ 1917</p> <hr/> <p>S. 89° 12' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>The cor. of secs. 32 and 33 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, at cor. of fences extending E. and N., with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W <u>S 32 S 33</u> T55N 1917</p> </div> </div>
20.375	<div style="text-align: center;"> <p>S. 89° 08' W., on the S. bdy. of sec. 32.</p> <p>Over gently rolling terrain.</p> <p>Point for Cor. No. 1, Tract 67, T. 55 N., R. 74 W., at proportionate distance, falls in cultivated field; there is no remaining evidence of the 1917 cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W <u>S 32</u> 1 S 5 TR 67 T55N R74W 2001</p> </div> </div>
40.765	<div style="text-align: center;"> <p>Point for the 1/4 sec. cor. of sec. 32 only, at proportionate distance, falls in cultivated field; found the 1917 iron post badly bent, lying loose 6 ins. below the surface of the ground, nearby.</p> </div>

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains									
	<p>Set a driveable FENO® iron rod, 14 ins. long, 5/8 in. diam., 12 ins. below the surface of the ground, with aluminum cap inscribed BLM CADASTRAL SURVEY and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td>T56N R74W</td></tr> <tr><td>1/4 S 32</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>T55N R74W</td></tr> <tr><td>2001</td></tr> </table> </div> <p>Removed 1917 monument from the field.</p>	T56N R74W	1/4 S 32	<hr style="width: 50%; margin: 0 auto;"/>		T55N R74W	2001		
T56N R74W									
1/4 S 32									
<hr style="width: 50%; margin: 0 auto;"/>									
T55N R74W									
2001									
61.13	<p>Cor. No. 4, Tract 67, T. 55 N., R. 74 W., identical with Cor. No. 1, Tract 68, T. 55 N., R. 74 W., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, in fence extending N. and S., with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td>T55N</td></tr> <tr><td>R74W</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>1 4</td></tr> <tr><td>TR 68 TR 67</td></tr> <tr><td>S 5</td></tr> <tr><td>1917</td></tr> </table> </div> <hr style="width: 50%; margin: 10px auto;"/> <p>S. 89° 06' W., beginning new measurement.</p> <p>Over gently rolling terrain.</p>	T55N	R74W	<hr style="width: 50%; margin: 0 auto;"/>		1 4	TR 68 TR 67	S 5	1917
T55N									
R74W									
<hr style="width: 50%; margin: 0 auto;"/>									
1 4									
TR 68 TR 67									
S 5									
1917									
9.80	<p>Greenough Road, bears SSE. and NNW.</p>								
20.41	<p>The cor. of secs. 31 and 32 only, identical with Cor. No. 4, Tract 68, T. 55 N., R. 74 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td>T56N</td></tr> <tr><td>R74W</td></tr> <tr><td>S 31 S 32</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>T55N</td></tr> <tr><td>1917</td></tr> </table> </div> <hr style="width: 50%; margin: 10px auto;"/> <p>S. 89° 08' W., on the S. bdy. of sec. 31.</p>	T56N	R74W	S 31 S 32	<hr style="width: 50%; margin: 0 auto;"/>		T55N	1917	
T56N									
R74W									
S 31 S 32									
<hr style="width: 50%; margin: 0 auto;"/>									
T55N									
1917									

Dependent Resurvey of the South Boundary,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	<p>Over rolling terrain.</p>																					
6.69	<p>The closing cor. of secs. 5 and 6, monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="3">T56N</td></tr> <tr><td colspan="3">R74W</td></tr> <tr><td colspan="3"><hr style="width: 100%;"/></td></tr> <tr><td style="text-align: center;">S</td><td style="text-align: center; border-left: 1px solid black; border-right: 1px solid black;">6</td><td style="text-align: center;">S 5</td></tr> <tr><td colspan="3" style="text-align: center;">CC</td></tr> <tr><td colspan="3">T55N</td></tr> <tr><td colspan="3">1917</td></tr> </table> </div>	T56N			R74W			<hr style="width: 100%;"/>			S	6	S 5	CC			T55N			1917		
T56N																						
R74W																						
<hr style="width: 100%;"/>																						
S	6	S 5																				
CC																						
T55N																						
1917																						
38.10	<p>Werner Road, bears SSE. and NNW.</p>																					
40.75	<p>The 1/4 sec. cor. of sec. 31 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">S 31</td></tr> <tr><td style="text-align: center;">1/4</td><td style="text-align: center;"><hr style="width: 50%;"/></td></tr> <tr><td colspan="2" style="text-align: center;">1917</td></tr> </table> <hr style="width: 60%; margin: 10px auto;"/> </div> <p>S. 89° 07' W., beginning new measurement.</p> <p>Over rolling terrain.</p>	S 31		1/4	<hr style="width: 50%;"/>	1917																
S 31																						
1/4	<hr style="width: 50%;"/>																					
1917																						
39.15	<p>The closing cor. of Tps. 55 and 56 N., Rs. 74 and 75 W., monumented with an iron post, 3 ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.</p> <hr style="width: 100%;"/> <div style="text-align: center; margin: 10px 0;"> <p>Dependent Resurvey of the Subdivisional Lines, T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming</p> <hr style="width: 100%;"/> <p>(Restoring the survey executed by Mortimer N. Grant in 1883)</p> <hr style="width: 60%; margin: 10px auto;"/> </div> <p>From the cor. of secs. 35 and 36 only, on the S. bdy. of the Tp.</p> <p>N. 0° 43' E., bet. secs. 35 and 36.</p>																					

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	Over rolling terrain.
40.40	<p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 35 S 36 2001</p> <p>Cor. is located 15 lks. E. of fence extending N. and S.</p>
60.60	Road, scoria surfaced, bears SSE. and NNW.
80.80	<p>The cor. of secs. 25, 26, 35 and 36, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, as filed in the Campbell County Clerk's Office, with an aluminum post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, in a collar of stone, with a steel fence post alongside, in projection of fence from the N., with aluminum cap mkd.</p> <p style="text-align: center;">RUMPH SURVEYS T56N R74W S 26 S 25 S 35 S 36 PLS 538 GILLETTE WYOMING 1990</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>Cor. is located 91 lks. S. of intersection of fences extending N., E. and WSW.</p> <hr/> <p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., as described in the field notes of the dependent resurvey, T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>S. 89° 53' W., bet. secs. 25 and 36.</p> <p>Over rolling terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
39.74	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 25 1/4 ——— S 36 2001</p> </div> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, N. of the cor.</p> <p>Cor. is located 11 lks. S. of fence extending irregularly E. and W.</p>
79.48	<p>The cor. of secs. 25, 26, 35 and 36.</p> <hr/> <p>N. 0° 59' W., bet. secs. 25 and 26.</p> <p>Over rolling terrain.</p>
40.405	<p>Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 26 S 25 2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 56 lks. W., of fence extending N. and S.</p>
80.81	<p>The cor. of secs. 23, 24, 25 and 26, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, as filed in the Campbell County Clerk's Office, with an aluminum post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, in fence extending E. and W., with aluminum cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>RUMPH SURVEYS T56N R74W S 23 S 24 <hr/>S 26 S 25 PLS 538 GILLETTE WYOMING 1990</p>
	<p>This position is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located 10 lks. E. of cor. of fences extending E. and irregularly N., and 1.02 chs. W. of intersection of fences extending E., S. and W.</p> <hr/> <p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., as described in the field notes of the dependent resurvey, T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>S. 89° 44' W., bet. secs. 24 and 25.</p> <p>Over rolling terrain.</p>
8.20	Bitter Creek, course NW.
9.40	Bitter Creek, course S.
10.60	Bitter Creek, course NNW.
40.33	<p>Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 24 1/4 ——— S 25 2001</p> <p>Set a steel fence post alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	Cor. is located 1.42 chs. S. of fence extending E. and W.
80.66	The cor. of secs. 23, 24, 25 and 26.
	N. 0° 09' E., bet. secs. 23 and 24.
	Over rolling terrain.
19.942	Point for the S. 1/16 sec. cor. of secs. 23 and 24.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W S1/16 S 23 S 24 2001
	Set a steel fence post alongside the stainless steel post.
	Cor. is located 98 lks. W. of fence extending N. and S.
39.885	Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W 1/4 S 23 S 24 2001
	Set a steel fence post alongside the stainless steel post.
	Cor. is located 1 ch. W. of fence extending N. and S.
79.77	Point for the cor. of secs. 13, 14, 23 and 24, at proportionate distance, there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S 14 S 13 S 23 S 24 2001
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located N. $69\frac{1}{4}^\circ$ W., 1.13 chs. dist., from intersection of fences extending E., W. and S.</p> <hr/> <p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., as described in the field notes of the dependent resurvey, T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>S. $89^\circ 30'$ W., bet. secs. 13 and 24.</p> <p>Over rolling terrain.</p>
40.185	<p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	T56N R74W S 13 1/4 ——— S 24 2001
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 40 lks. N. of fence extending E. and W.</p>
56.80	Bitter Creek, Course NNE.
80.37	The cor. of secs. 13, 14, 23 and 24.
	<hr/> <p>N. $0^\circ 09'$ E., bet. secs. 13 and 14.</p> <p>Over gently rolling terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
39.885	<p>Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate distance, falls in cultivated field; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 14 S 13 2001</p>
79.77	<p>The cor. of secs. 11, 12, 13 and 14, monumented by Lawrence C. Kay, Wyoming Registered Land Surveyor No. 489, with a steel reinforcement rod, 30 ins. long, ¾ in. diam., firmly set, projecting 11 ins. above the ground, at intersection of abandoned fences extending E., S. and W., with aluminum cap mkd. UINTAH ENG & LS T56N R74W S11 S12 S13 S14 1999 WYO 489, with a steel reinforcement rod, 24 ins. long, ⅝ in. diam., firmly set flush with the ground alongside, with aluminum cap mkd. RLS 387, as filed in the Campbell County Clerk's Office. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 11 S 12 S 14 S 13 2001</p> <p>Deposit the steel reinforcement rods inside and set a steel fence post alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., as described in the field notes of the dependent resurvey, T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>S. 89° 44' W., bet. secs. 12 and 13.</p> <p>Over rolling terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
40.195	<p>Point for the 1/4 sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post 28, ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 12 1/4 ——— S 13 2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 26 lks. N. of fence extending E. and W.</p>
41.30	Bitter Creek, Course NNE.
80.39	The cor. of secs. 11, 12, 13 and 14.
	<hr/> <p>N. 1° 45' E., bet. secs. 11 and 12.</p> <p>Over gently rolling terrain.</p>
40.50	<p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 11 S 12 2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 86 lks. S. of fence extending E. and W.</p>
60.75	<p>Point for the N. 1/16 sec. cor. of secs. 11 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
81.00	<p style="text-align: center;">T56N R74W N1/16 S 11 S 12 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 1, 2, 11 and 12, remonumented by Lawrence C. Kay, Wyoming Registered Land Surveyor No. 489, with a steel reinforcement rod, 30 ins. long, 3/4 in. diam., firmly set, projecting 13 ins. above the ground, at cor. of abandoned fences extending N. and E., with aluminum cap mkd. UINTAH ENG & LS T56N R74W S1 S2 S11 S12 1999 WYO 489, with a steel reinforcement rod, 21 ins. long, 5/8 in. diam., firmly set flush with the ground alongside, as filed in the Campbell County Clerk's Office. This position is accepted as a careful and faithful perpetuation the of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 2 S 1 ----- S 11 S 12 2001</p> <p>Deposit the steel reinforcement rods inside and set a steel fence post alongside the stainless steel post.</p>
19.60	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., identical with Cor. No. 3, Tract 55, T. 56 N., R. 73 W., monumented with an iron post, 2 ins. diam., as described in the field notes of the dependent resurvey, T. 56 N., R. 73 W., executed concurrently under this same group.</p> <p>N. 89° 40' W., bet. secs. 1 and 12.</p> <p>Over rolling terrain.</p> <p>Point for the E. 1/16 sec. cor. of secs. 1 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T56N R74W S 1 E1/16 ——— S 12 2001</p>
39.20	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W S 1 1/4 ——— S 12 2001</p>
	<p>Set a steel fence post alongside the stainless steel post.</p>
63.20	<p>Bitter Creek, Course NNE.</p>
78.40	<p>The cor. of secs. 1, 2, 11 and 12.</p>
	<hr/> <p>NORTH, bet. secs. 1 and 2.</p> <p>Over gently rolling terrain.</p>
21.26	<p>Point for the S. 1/16 sec. cor. of secs. 1 and 2.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W S1/16 S 2 S 1 2001</p>
	<p>Set a steel fence post alongside the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
42.52	<p>Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 2 S 1 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p>
85.94	<p>Point for the closing cor. of secs. 1 and 2, at intersection with the Fourteenth Standard Parallel North, determined longitudinally at record bearing from the cor. of secs. 1, 2, 11, and 12; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T57N R74W S 35 ----- S 2 S 1 T56N R74W CC 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p>
	<p>The point for the 1/4 sec. cor. of sec. 1 only, T. 56 N., R. 74 W., is at midpoint on the N. bdy. of sec. 1.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T57N R74W ----- 1/4 S 1 T56N R74W 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From this point, the angle point marking the restored position of the original standard cor. of Tps. 57 N., Rs. 73 and 74 W., bears N. 89° 42' E., 2.99 chs. dist.</p> <hr/> <p>From the cor. of secs. 34 and 35 only, on the S. bdy. of the Tp. N. 0° 18' W., bet. secs. 34 and 35. Over rolling terrain.</p>
27.90	SA Creek, course WSW.
40.165	<p>Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 34 S 35 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
80.33	<p>Point for the cor. of secs. 26, 27, 34 and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 27 S 26 <hr/>S 34 S 35 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From this point, a position established by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, bears N. 82° 11' W., 5 lks. dist., monumented with a steel reinforcement rod, ¾ in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. TSL T56N R74W S26 S27 S34 S35 2001 PLS 5298. This position was established by proportionate measurement from an erroneous position of controlling cor. W. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p>
	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>S. 88° 54' W., bet. secs. 26 and 35.</p> <p>Over rolling terrain.</p>
19.55	<p>Road, scoria surfaced, bears ESE. and WNW.</p>
40.63	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W</p> <p>S 26</p> <p>1/4 ———</p> <p>S 35</p> <p>2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
81.26	<p>The cor. of secs. 26, 27, 34 and 35.</p>
40.175	<p>N. 1° 26' E., bet. secs. 26 and 27.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 27 S 26 2002</p> <p>Cor. is located 2 lks. N. of fence extending E. and W.</p>
80.35	<p>The cor. of secs. 22, 23, 26 and 27, monumented by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, with a steel reinforcement rod, 30 ins. long, ¾ in. diam., firmly set, projecting 7 ins. above the ground, at intersection of fences extending E. and W., with abandoned fence extending N., with aluminum cap mkd. TSL T56N R74W S22 S23 S26 S27 2001 PLS 5298. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 22 S 23 S 27 S 26 2001</p> <p>Deposit the steel reinforcement rod inside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>S. 88° 31' W., bet. secs. 23 and 26.</p> <p>Over rolling terrain.</p>
38.92	<p>Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S 23 1/4 ——— S 26 2001
	Set a steel fence post alongside the stainless steel post.
51.90	Road, scoria surfaced, bears ESE. and WNW.
77.84	The cor. of secs. 22, 23, 26 and 27.
	N. 1° 11' W., bet. secs. 22 and 23. Over rolling terrain.
30.90	Road, scoria surfaced, bears SE. and NW.
40.71	Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T56N R74W 1/4 S 22 S 23 2001
	Set a steel fence post alongside the stainless steel post.
61.065	Point for the N. 1/16 sec. cor. of secs. 22 and 23.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T56N R74W N1/16 S 22 S 23 2001
	Set a steel fence post alongside the stainless steel post.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains											
81.42	<p>The cor. of secs. 14, 15, 22 and 23, monumented by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, with a steel reinforcement rod, 30 ins. long, 3/4 in. diam., firmly set, projecting 7 ins. above the ground, at projected cor. of abandoned fences extending N. and E., with aluminum cap mkd. TSL T56N R74W S14 S15 S22 S23 2001 PLS 5298, with a steel fence post alongside. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td>S 15</td><td> S 14</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 22</td><td> S 23</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">2001</td></tr> </table> </div> <p>Deposit the steel reinforcement rod inside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>S. 89° 43' W., bet. secs. 14 and 23.</p> <p>Over rolling terrain.</p>	T56N	R74W	S 15	S 14			S 22	S 23	2001	
T56N	R74W										
S 15	S 14										
S 22	S 23										
2001											
39.84	<p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td></td><td>S 14</td></tr> <tr><td>1/4</td><td>———</td></tr> <tr><td></td><td>S 23</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">2001</td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p>	T56N	R74W		S 14	1/4	———		S 23	2001	
T56N	R74W										
	S 14										
1/4	———										
	S 23										
2001											

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
79.68	<p>Cor. is located 24 lks. S. of fence extending E. and W.</p> <p>The cor. of secs. 14, 15, 22 and 23.</p> <hr/> <p>N. 0° 01' W., bet. secs. 14 and 15.</p> <p>Over rolling terrain.</p>
40.72	<p>Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 15 S 14 2001</p> </div> <p>Set a steel fence post alongside the stainless steel post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>Cor. is located N. 50½° W., 2.21 chs. dist., from cor. of fences extending N. and W.</p>
81.44	<p>Point for the cor. of secs. 10, 11, 14 and 15, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 10 S 11 <hr/>S 15 S 14 2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located S. 31½° W., 2.72 chs. dist., from projected intersection of fences extending N. and S. with fence from the E.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>N. 89° 05' W., bet. secs. 11 and 14.</p> <p>Over gently rolling terrain.</p>
39.955	<p>Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W</p> <p>S 11</p> <p>1/4 ———</p> <p>S 14</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
79.91	<p>The cor. of secs. 10, 11, 14 and 15.</p> <hr/> <p>N. 0° 49' E., bet. secs. 10 and 11.</p> <p>Over rolling terrain.</p>
40.725	<p>Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W</p> <p>1/4</p> <p>S 10 S 11</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post</p> <p>Cor. is located S. 48° W., 1.90 chs. dist., from intersection of fences extending irregularly N., E. and S.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains 81.45</p>	<p>Point for the cor. of secs. 2, 3, 10 and 11, at proportionate distance, falls in cultivated field; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td colspan="2">T56N R74W</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S 3</td><td style="padding: 0 5px;">S 2</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S 10</td><td style="padding: 0 5px;">S 11</td></tr> <tr><td colspan="2" style="text-align: center;">2001</td></tr> </table> </div>	T56N R74W		S 3	S 2	S 10	S 11	2001			
T56N R74W											
S 3	S 2										
S 10	S 11										
2001											
<p>40.61</p>	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 88° 45' W., bet. secs. 2 and 11.</p> <p>Over gently rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate distance, falls in cultivated field; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 15 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td colspan="2">T56N R74W</td></tr> <tr><td colspan="2" style="text-align: center;">S 2</td></tr> <tr><td style="text-align: center;">1/4</td><td style="border-top: 1px solid black; border-bottom: 1px solid black; width: 20px;"></td></tr> <tr><td colspan="2" style="text-align: center;">S 11</td></tr> <tr><td colspan="2" style="text-align: center;">2001</td></tr> </table> </div>	T56N R74W		S 2		1/4		S 11		2001	
T56N R74W											
S 2											
1/4											
S 11											
2001											
<p>81.22</p>	<p>The cor. of secs. 2, 3, 10 and 11.</p> <hr/> <p>NORTH, bet. secs. 2 and 3.</p> <p>Over rolling terrain.</p>										
<p>20.36</p>	<p>Point for the S. 1/16 sec. cor. of secs. 2 and 3.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T56N R74W S1/16 S 3 S 2 2001</p>
40.72	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W 1/4 S 3 S 2 2001</p>
61.08	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the N. 1/16 sec. cor. of secs. 2 and 3, falls in road, scoria surfaced, bears SSE. and NNW.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W N1/16 S 3 S 2 2001</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground for a reference monument, bears S. 17¾° W., 57.0 lks. dist., with brass cap mkd. RM T56N R74W S3 37.6 FT TO COR 2001 and an arrow point to the cor.</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground for a reference monument, bears N. 66½° W., 63.8 lks. dist., with brass cap mkd. RM T56N R74W S3 42.1 FT TO COR 2001 and an arrow point to the cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains 82.05</p>	<p>Point for the closing cor. of secs. 2 and 3, at intersection with the Fourteenth Standard Parallel North, determined longitudinally at record bearing from the cor. of secs. 2, 3, 10, and 11; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 5px;">T57N</td><td style="padding: 0 5px;">R74W</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 0 5px;">S 34</td></tr> <tr><td style="padding: 0 5px;">S 3</td><td style="padding: 0 5px;">S 2</td></tr> <tr><td style="padding: 0 5px;">T56N</td><td style="padding: 0 5px;">R74W</td></tr> <tr><td colspan="2" style="padding: 0 5px;">CC</td></tr> <tr><td colspan="2" style="padding: 0 5px;">2001</td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 2 only, T. 56 N., R. 74 W., is at midpoint on the N. bdy. of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 5px;">T57N</td><td style="padding: 0 5px;">R74W</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 0 5px;">1/4 S 2</td></tr> <tr><td style="padding: 0 5px;">T56N</td><td style="padding: 0 5px;">R74W</td></tr> <tr><td colspan="2" style="padding: 0 5px;">2001</td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, the angle point marking the restored position of the original standard cor. of secs. 35 and 36, T. 57 N., R. 74 W., bears N. 88° 02' E., 4.22 chs. dist.</p> <hr/> <p>The point for the E. 1/16 sec. cor. of sec. 2 only, T. 56 N., R. 74 W., is at midpoint bet. the closing cor. of secs. 1 and 2 and the 1/4 sec. cor. of sec. 2 only, on the N. bdy. of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	T57N	R74W	S 34		S 3	S 2	T56N	R74W	CC		2001		T57N	R74W	1/4 S 2		T56N	R74W	2001	
T57N	R74W																				
S 34																					
S 3	S 2																				
T56N	R74W																				
CC																					
2001																					
T57N	R74W																				
1/4 S 2																					
T56N	R74W																				
2001																					

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T57N R74W ----- E1/16 S 2 T56N R74W 2001</p>
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, Cor. No. 3, Tract 56, T. 57 N., R. 74 W., bears S. 89° 06' W., 7 lks. dist.</p>
	<p>From the cor. of secs. 33 and 34 only, identical with Cor. No. 1, Tract 73, T. 55 N., R. 74 W., on the S. bdy. of the Tp.</p> <p>N. 0° 10' W., bet. secs. 33 and 34.</p> <p>Over gently rolling terrain.</p>
19.97	<p>Point for the S. 1/16 sec. cor. of secs. 33 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W S1/16 S 33 S 34 2001</p>
39.94	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the 1/4 sec. cor. of secs. 33 and 34, determined longitudinally by proportionate measurement and latitudinally by fence extending E. and W.; there is no remaining evidence of the original monument.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W 1/4 S 33 S 34 2002</p>
	<p>Set a steel fence post alongside the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains</p>	<p>From this point, a position established by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, bears WEST, 13 lks. dist., monumented with a steel reinforcement rod, 24 ins. long, $\frac{5}{8}$ in. diam., firmly set, projecting 4 ins. above the ground, in fence extending E. and W., with aluminum cap mkd. LAND SURVEYING INC T56N R74W 1/4 S33 S34 2001 PLS 5655. This position was established at an incorrect proportionate position longitudinally and is not accepted as a careful and faithful reestablishment of the original cor. position. Mr. Brady granted permission to move his monument to the correct proportionate position, where it was deposited alongside the stainless steel post.</p> <hr/> <p>N. $0^{\circ} 10'$ W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>35.90 SA Creek, course WNW.</p> <p>40.08 Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T56N R74W</td> </tr> <tr> <td>S 28</td> <td>S 27</td> </tr> <tr> <td>S 33</td> <td>S 34</td> </tr> <tr> <td colspan="2">2002</td> </tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, a position established by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, bears N. $89^{\circ} 29'$ W., 25 lks. dist., monumented with a steel reinforcement rod, 24 ins. long, $\frac{5}{8}$ in. diam., firmly set, projecting 2 ins. above the ground, with aluminum cap mkd. LAND SURVEYING INC T56N R74W S27 S28 S33 S34 2001 PLS 5655. This position was established at an incorrect proportionate position and is not accepted as a careful and faithful reestablishment of the original cor. position. Mr. Brady granted permission to move his monument to the correct proportionate position, where it was deposited alongside the stainless steel post.</p>	T56N R74W		S 28	S 27	S 33	S 34	2002	
T56N R74W									
S 28	S 27								
S 33	S 34								
2002									

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From this same point, a position established by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, bears N. 69° 30' W., 14 lks. dist., monumented with a steel reinforcement rod, ¾ in. diam., firmly set, projecting 6 ins. above the ground, with aluminum cap mkd. TSL T56N R74W S27 S28 S33 S34 2001 PLS 5298. This position was established by proportionate measurement from an erroneous position of controlling cor. W. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr/> <p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>S. 88° 59' W., bet. secs. 27 and 34.</p> <p>Over gently rolling terrain.</p>
40.375	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T56N R74W S 27 1/4 ——— S 34 2002 </div> <p>Set a steel fence post alongside the stainless steel post.</p>
80.50	Wash, drains S.
80.75	The cor. of secs. 27, 28, 33 and 34.
	<hr/> <p>N. 0° 05' E., bet. secs. 27 and 28.</p> <p>Over rolling terrain.</p>
20.04	<p>Point for the S. 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S1/16 S 28 S 27 2002
	Set a steel fence post alongside the stainless steel post.
40.08	Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T56N R74W 1/4 S 28 S 27 2002
	Set a steel fence post alongside the stainless steel post.
60.12	Point for the N. 1/16 sec. cor. of secs. 27 and 28.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W N1/16 S 28 S 27 2002
	Set a steel fence post alongside the stainless steel post.
65.70	Wash, drains NNW.
80.16	The cor. of secs. 21, 22, 27 and 28, monumented by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, with a steel reinforcement rod, 30 ins. long, ¾ in. diam., firmly set, projecting 7 ins. above the ground, at intersection of fence extending E. and W., with abandoned fence extending N. and S., with aluminum cap mkd. TSL T56N R74W S21 S22 S27 S28 2001 PLS 5298. This position is accepted as the best available evidence of the original cor. position.
	At the corner point

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains											
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td>S 21</td><td> S 22</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 28</td><td> S 27</td></tr> <tr><td colspan="2" style="text-align: center;">2001</td></tr> </table> </div> <p>Deposit the steel reinforcement rod inside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>S. 88° 54' W., bet. secs. 22 and 27.</p> <p>Over rolling terrain.</p>	T56N	R74W	S 21	S 22			S 28	S 27	2001	
T56N	R74W										
S 21	S 22										
S 28	S 27										
2001											
41.32	<p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td colspan="2" style="text-align: center;">S 22</td></tr> <tr><td>1/4</td><td>———</td></tr> <tr><td colspan="2" style="text-align: center;">S 27</td></tr> <tr><td colspan="2" style="text-align: center;">2001</td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p>	T56N	R74W	S 22		1/4	———	S 27		2001	
T56N	R74W										
S 22											
1/4	———										
S 27											
2001											
82.64	<p>The cor. of secs. 21, 22, 27 and 28.</p> <hr/> <p>N. 0° 52' E., bet. secs. 21 and 22.</p> <p>Over rolling terrain.</p>										
39.24	<p>Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
58.86	<p style="text-align: center;">T56N R74W 1/4 S 21 S 22 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the N. 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
78.48	<p style="text-align: center;">T56N R74W N1/16 S 21 S 22 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 15, 16, 21 and 22, monumented by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, with a steel reinforcement rod, 30 ins. long, ¾ in. diam., firmly set, projecting 5 ins. above the ground, at cor. of abandoned fences extending S. and W., with aluminum cap mkd. TSL T56N R74W S15 S16 S21 S22 2001 PLS 5298, with a steel fence post alongside. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W S 16 S 15 S 21 S 22 2002</p> <p>Deposit the steel reinforcement rod inside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 86° 45' W., bet. secs. 15 and 22.</p> <p>Over rolling and broken terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
19.965	<p>Point for the E. 1/16 sec. cor. of secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 15 E1/16 ——— S 22 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
36.20	Road, scoria surfaced, bears NNE. and SSW.
39.93	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 15 1/4 ——— S 22 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
79.86	<p>The cor. of secs. 15, 16, 21 and 22.</p> <hr/> <p>N. 0° 28' W., bet. secs. 15 and 16.</p> <p>Over rolling and broken terrain.</p>
42.095	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
84.19	<p style="text-align: center;">T56N R74W 1/4 S 16 S 15 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 9, 10, 15 and 16, monumented by Willis B. "Jack" Comer, Wyoming Registered Land Surveyor No. 366, with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 9 S 10 S 16 S 15 LS 366 1967</p> <p>This position is accepted as the best available evidence of the original cor. position.</p>
39.93	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 89° 01' W., bet. secs. 10 and 15.</p> <p>Over rolling terrain.</p> <p>The 1/4 sec. cor. of secs. 10 and 15, monumented with a mound of stone, 3 ft. base, 1 ft. high, no mkd. stone found. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 10 1/4 ——— S 15 2001</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
40.46	<p>Set a steel fence post alongside the stainless steel post and rebuild the mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <hr/> <p>S. 88° 27' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>The cor. of secs. 9, 10, 15 and 16.</p> <hr/>
40.37	<p>N. 0° 04' E., bet. secs. 9 and 10.</p> <p>Over rolling and broken terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 9 S 10 2002</p> </div>
80.74	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 15 lks. N. of wash, drains NW.</p> <p>The cor. of secs. 3, 4, 9 and 10, monumented by person(s) unknown, with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 3 S 4 S 9 S 10</p> </div> <p>This position is accepted as the best available evidence of the original cor. position.</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	S. 88° 15' W., bet. secs. 3 and 10. Over rolling terrain.
20.365	Point for the E. 1/16 sec. cor. of secs. 3 and 10. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T56N R74W S 3 E1/16 ——— S 10 2001 </div>
	Set a steel fence post alongside the stainless steel post.
40.73	Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original cor. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T56N R74W S 3 1/4 ——— S 10 2001 </div>
	Set a steel fence post alongside the stainless steel post.
81.46	The cor. of secs. 3, 4, 9 and 10.
	N. 0° 05' E., bet. secs. 3 and 4. Over rolling terrain.
40.38	Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T56N R74W 1/4 S 4 S 3 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
60.57	<p>Point for the N. 1/16 sec. cor. of secs. 3 and 4.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W N1/16 S 4 S 3 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
81.71	<p>The closing cor. of secs. 3 and 4, at intersection with the Fourteenth Standard Parallel North, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, in a collar of stone, with a steel fence post alongside, as filed in the Campbell County Clerk's Office, with aluminum cap mkd.</p> <p style="text-align: center;">RUMPH SURVEYS LS 538 T57N 33 -----R74W T56N 4 3 CC 1987 GILLETTE WYOMING</p> <p>This position is accepted as the best available evidence of the original cor. position.</p>
	<hr/> <p>The point for the 1/4 sec. cor. of sec. 3 only, T. 56 N., R. 74 W., is at midpoint on the N. bdy. of sec. 3.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T57N R74W 1/4 S 3 T56N R74W 2002</p>
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, the angle point marking the restored position of the original standard cor. of secs. 34 and 35, T. 57 N., R. 74 W., bears N. 88° 01' E., 7.42 chs. dist.</p>
	<p>From the cor. of secs. 32 and 33 only, on the S. bdy. of the Tp.</p> <p>N. 0° 52' E., bet. secs. 32 and 33.</p> <p>Over gently rolling terrain.</p>
39.97	<p>The 1/4 sec. cor. of secs. 32 and 33, monumented by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, at intersection of fences extending N., E. and S., with aluminum cap mkd. LAND SURVEYING INC T56N R74W 1/4 S32 S33 2001 PLS 5655. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W 1/4 S 32 S 33 2002</p>
	<p>Deposit the steel reinforcement rod inside the stainless steel post.</p> <p>Cor. is located 51 lks. S. of cor. of fences extending S. and W.</p>
	<p>N. 1° 12' W., beginning new measurement.</p> <p>Over rolling terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains 40.28</p>	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T56N</td> <td style="padding: 0 5px;">R74W</td> <td></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 29</td> <td style="padding: 0 5px;">S 28</td> <td></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 32</td> <td style="padding: 0 5px;">S 33</td> <td></td> </tr> <tr> <td colspan="3" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, a position established by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, bears N. 88° 38' E., 12 lks. dist., monumented with a steel reinforcement rod, 24 ins. long, 5⁄8 in. diam., firmly set, projecting 2 ins. above the ground, with aluminum cap mkd. LAND SURVEYING INC T56N R74W S28 S29 S32 S33 2001 PLS 5655. This position was established at an incorrect proportionate position and is not accepted as a careful and faithful reestablishment of the original cor. position. Mr. Brady granted permission to move his monument to the correct proportionate position, where it was deposited alongside the stainless steel post.</p> <p>From this same point, a position established by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, bears N. 56° 39' W., 24 lks. dist., monumented with a steel reinforcement rod, ¾ in. diam., firmly set, projecting 11 ins. above the ground, with aluminum cap mkd. TSL T56N R74W S28 S29 S32 S33 2001 PLS 5298. This position was established by proportionate measurement from an erroneous position of controlling cor. W. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr style="border: 0.5px solid black;"/> <p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 19' W., bet. secs. 28 and 33.</p> <p>Over gently rolling terrain.</p>	T56N	R74W		S 29	S 28		S 32	S 33		2002		
T56N	R74W												
S 29	S 28												
S 32	S 33												
2002													
<p>40.42</p>	<p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p>												

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 28 1/4 ——— S 33 2002</p> <p>Set a steel fence post alongside the stainless steel post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p>
80.84	<p>The cor. of secs. 28, 29, 32 and 33.</p> <hr/> <p>N. 0° 08' E., bet. secs. 28 and 29.</p> <p>Over rolling terrain.</p>
40.265	<p>Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, supported by a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 29 S 28 2002</p>
80.53	<p>The cor. of secs. 20, 21, 28 and 29, monumented by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with aluminum cap mkd. LAND SURVEYING INC T56N R74W S20 S21 S28 S29 2001 PLS 5655. This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<div style="text-align: center;"> T56N R74W S 20 S 21 <hr style="width: 100%;"/> S 29 S 28 2002 </div>
	<p>Deposit the steel reinforcement rod inside and set a steel fence post alongside the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>From this point, a position established by Calvin O. Heinly, Wyoming Registered Land Surveyor No. 5298, bears N. 64° 02' W., 17 lks. dist., monumented with a steel reinforcement rod, ¾ in. diam., firmly set, projecting 7 ins. above the ground, with aluminum cap mkd. TSL T56N R74W S20 S21 S28 S29 2001 PLS 5298. This position was established by proportionate measurement from an erroneous position of controlling cor. S. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 89° 35' W., bet. secs. 21 and 28.</p> <p>Over gently rolling terrain.</p>
37.80	SA Creek, course NW.
40.37	<p>Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> T56N R74W S 21 1/4 ——— S 28 2002 </div>
	<p>Set a steel fence post alongside the stainless steel post.</p>
41.40	SA Creek, course ESE.
44.00	SA Creek, course NNE.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains 80.74</p>	<p>The cor. of secs. 20, 21, 28 and 29.</p> <hr/>
	<p>N. 0° 24' E., bet. secs. 20 and 21.</p> <p>Over rolling terrain.</p>
<p>40.265</p>	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 20 S 21 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
<p>57.00</p>	<p>SA Creek, course NW.</p>
<p>80.53</p>	<p>Point for the cor. of secs. 16, 17, 20 and 21, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 17 S 16 S 20 S 21 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/>
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 88° 58' W., bet. secs. 16 and 21.</p> <p>Over rolling terrain.</p>
<p>20.34</p>	<p>Point for the E. 1/16 sec. cor. of secs. 16 and 21.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 16 E1/16 ——— S 21 2002</p>
40.68	<p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 16 1/4 ——— S 21 2002</p>
81.36	<p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 16, 17, 20 and 21.</p> <hr/>
40.265	<p>N. 0° 12' W., bet. secs. 16 and 17.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 17 S 16 2002</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains											
80.53	<p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 8, 9, 16 and 17, monumented by Willis B. "Jack" Comer, Wyoming Registered Land Surveyor No. 366, with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="padding: 0 10px;">T56N</td><td style="padding: 0 10px;">R74W</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S 8</td><td style="padding: 0 5px;">S 9</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S 17</td><td style="padding: 0 5px;">S 16</td></tr> <tr><td colspan="2" style="padding: 0 10px;">LS 366 1967</td></tr> </table> </div> <p>This position is accepted as the best available evidence of the original cor. position.</p> <hr/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 88° 27' W., bet. secs. 9 and 16.</p> <p>Over rolling terrain.</p>	T56N	R74W	S 8	S 9	S 17	S 16	LS 366 1967			
T56N	R74W										
S 8	S 9										
S 17	S 16										
LS 366 1967											
14.00	Road, scoria surfaced, bears SSE. and NNW.										
40.48	<p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance, falls on N. edge of trail road, bears ESE. and WNW.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="padding: 0 10px;">T56N</td><td style="padding: 0 10px;">R74W</td></tr> <tr><td style="padding: 0 5px;">S 9</td><td style="padding: 0 5px;">—</td></tr> <tr><td style="padding: 0 5px;">1/4</td><td style="padding: 0 5px;">—</td></tr> <tr><td style="padding: 0 5px;">S 16</td><td style="padding: 0 5px;">—</td></tr> <tr><td colspan="2" style="padding: 0 10px;">2002</td></tr> </table> </div>	T56N	R74W	S 9	—	1/4	—	S 16	—	2002	
T56N	R74W										
S 9	—										
1/4	—										
S 16	—										
2002											
80.96	<p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 8, 9, 16 and 17.</p> <hr/> <p>N. 0° 09' E., bet. secs. 8 and 9.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	Over rolling terrain.
40.055	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 8 S 9 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
60.082	<p>Point for the N. 1/16 sec. cor. of secs. 8 and 9.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W N1/16 S 8 S 9 2002</p> <p>from which</p> <p style="text-align: center;">A pine, 8 ins. diam., bears S. 16¾° E., 26 lks. dist., mkd. N1/16 S9 BT.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
60.60	Ravine, drains W.
80.11	The cor. of secs. 4, 5, 8 and 9, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, in a collar of stone, with a steel fence post alongside, as filed in the Campbell County Clerk's Office, with aluminum cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">RUMPH SURVEYS T56N R74W S 5 S 4 <hr/>S 8 S 9 PLS 538 GILLETTE WYOMING 1988</p> <p>This position is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located 42 lks. N. of buried pipeline, bears ENE. and WSW.</p>
40.42	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 88° 00' W., bet. secs. 4 and 9.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
80.84	<p style="text-align: center;">T56N R74W S 4 1/4 ——— S 9 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 4, 5, 8 and 9.</p>
40.15	<p>NORTH, bet. secs. 4 and 5.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 5 S 4 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
81.70	<p>Point for the closing cor. of secs. 4 and 5, at intersection with the Fourteenth Standard Parallel North, determined longitudinally at record bearing from the cor. of secs. 4, 5, 8 and 9; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T57N R74W S 32 ----- S 5 S 4 T56N R74W CC 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, a position established by Duane A. Wamre, Wyoming Registered Land Surveyor No. 5149, bears S. 87° 51' W., 56 lks. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with aluminum cap mkd. KADRMAS LEE & JACKSON. This position was established by proportionate measurement from erroneous controlling cors. E. and W. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p>
	<p>The point for the 1/4 sec. cor. of sec. 4 only, T. 56 N., R. 74 W., is at midpoint on the N. bdy. of sec. 4.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T57N R74W <hr style="width: 10%; margin: auto;"/> 1/4 S 4 T56N R74W 2002
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, the angle point marking the restored position of the original standard cor. of secs. 33 and 34, T. 57 N., R. 74 W., bears N. 87° 59' E., 10.52 chs. dist.</p> <hr/> <p>The point for the E. 1/16 sec. cor. of sec. 4 only, T. 56 N., R. 74 W., is at midpoint bet. the closing cor. of secs. 3 and 4 and the 1/4 sec. cor. of sec. 4 only, on the N. bdy. of sec. 4.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	T57N R74W <hr style="width: 10%; margin: auto;"/> E1/16 S 4 T56N R74W 2002
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, the angle point marking the restored position of the original standard cor. of secs. 33 and 34, T. 57 N., R. 74 W., bears S. 88° 00' W., 9.71 chs. dist.</p> <hr/> <p>From the cor. of secs. 31 and 32 only, identical with Cor. No. 4, Tract 68, T. 55 N., R. 74 W., on the S. bdy. of the Tp.</p> <p>N. 0° 04' E., bet. secs. 31 and 32.</p> <p>Over gently rolling terrain.</p>
29.60	Greenough Road, bears SSE. and WNW.
39.595	Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W 1/4 S 31 S 32 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
79.19	<p>The cor. of secs. 29, 30, 31 and 32, monumented by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, with an aluminum post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, as filed in the Campbell County Clerk's Office, with aluminum cap mkd.</p> <p style="text-align: center;">LAND SURVEYING INC T56N R74W S 30 S 29 ----- S 31 S 32 2001 PLS 5655</p> <p>This position is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located S. 45° W., 12 lks. dist., from cor. of fences extending S. and W.</p>
40.605	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>S. 88° 23' W., bet. secs. 29 and 32.</p> <p>Over gently rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S 29 1/4 ——— S 32 2002
	Set a steel fence post alongside the stainless steel post.
	Cor. is located in or near abandoned fence extending E. and W.
81.21	The cor. of secs. 29, 30, 31 and 32.
	S. 89° 58' W., bet. secs. 30 and 31.
	Over gently rolling terrain.
23.80	Greenough Road, bears N. and S.
40.81	The 1/4 sec. cor. of secs. 30 and 31, monumented by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, with an aluminum post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, at intersection of fences extending E., W. and N., as filed in the Campbell County Clerk's Office, with aluminum cap mkd.
	LAND SURVEYING INC T56N R74W S 30 1/4 ——— S 31 2001 PLS 5655
	This position is accepted as the best available evidence of the original cor. position.
	—————
	S. 89° 42' W., beginning new measurement.
	Over gently rolling terrain, along fence.
39.08	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>NORTH, bet. secs. 29 and 30.</p> <p>Over gently rolling terrain.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W 1/4 S 30 S 29 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p>
80.26	<p>Point for the cor. of secs. 19, 20, 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W S 19 S 20 S 30 S 29 2002</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 88° 12' W., bet. secs. 20 and 29.</p> <p>Over rolling terrain.</p>
20.345	<p>Point for the E. 1/16 sec. cor. of secs. 20 and 29.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S 20 E1/16 ——— S 29 2002
	Set a steel fence post alongside the stainless steel post.
40.69	Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W S 20 1/4 ——— S 29 2002
	Set a steel fence post alongside the stainless steel post.
61.035	Point for the W. 1/16 sec. cor. of secs. 20 and 29.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W S 20 W1/16 ——— S 29 2002
	Set a steel fence post alongside the stainless steel post.
81.38	The cor. of secs. 19, 20, 29 and 30.
	S. 89° 15' W., bet. secs. 19 and 30.
	Over gently rolling terrain.
40.52	Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 19 1/4 ——— S 30 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 22 lks. S. of road, scoria surfaced, bears ESE. and WNW.</p>
59.10	Greenough Road, bears SSE. and NNW.
79.66	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.
	<hr/> <p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0° 12' E., bet. secs. 19 and 20.</p> <p>Over rolling and broken terrain.</p>
20.065	<p>Point for the S. 1/16 sec. cor. of secs. 19 and 20.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S1/16 S 19 S 20 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W 1/4 S 19 S 20 2002
	Set a steel fence post alongside the stainless steel post.
60.195	Point for the N. 1/16 sec. cor. of secs. 19 and 20.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W N1/16 S 19 S 20 2002
	Set a steel fence post alongside the stainless steel post.
80.26	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W S 18 S 17 S 19 S 20 2002
	Set a steel fence post alongside the stainless steel post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
	From the cor. of secs. 16, 17, 20 and 21.
	S. 88° 01' W., bet. secs. 17 and 20.
	Over rolling terrain.
40.82	Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 17 1/4 ——— S 20 2002</p>
	Set a steel fence post alongside the stainless steel post.
48.70	SA Creek, course NW.
81.64	The cor. of secs. 17, 18, 19 and 20.
	<hr/> <p>S. 89° 04' W., bet. secs. 18 and 19.</p> <p>Over rolling and broken terrain.</p>
20.38	Point for the E. 1/16 sec. cor of secs. 18 and 19.
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 18 E1/16 ——— S 19 2002</p>
	Set a steel fence post alongside the stainless steel post.
39.30	Road, gravel surfaced, bears N. and S
40.30	Wash, drains N.
40.76	Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
79.94	<p style="text-align: center;">T56N R74W S 18 1/4 ——— S 19 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with a stainless steel post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.</p>
20.065	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 0° 02' W., bet. secs. 17 and 18.</p> <p>Over rolling and broken terrain.</p> <p>Point for the S. 1/16 sec. cor. of secs. 17 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
40.13	<p style="text-align: center;">T56N R74W S1/16 S 18 S 17 2002</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. diam., bears S. 86° W., 8 lks. dist., mkd. S1/16 S18 BT.</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p style="text-align: center;">T56N R74W 1/4 S 18 S 17 2002</p>
43.30	<p>Set a steel fence post alongside the stainless steel post. SA Creek, course SSW.</p>
59.495	<p>Point selected for the witness cor. to the N. 1/16 sec. cor. of sec. 17 and 18. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WC T56N R74W N1/16 ↑ S 18 S 17 2002</p>
60.195	<p>Set a steel fence post alongside the stainless steel post. True point for the N. 1/16 sec. cor. of secs. 17 and 18, falls on sandstone formation, rising approximately 30 ft. above ground, where it is impracticable to establish a permanent monument.</p>
80.26	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance; there is no remaining evidence of the original cor. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T56N R74W S 7 S 8 ----- S 18 S 17 2002</p>
	<p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 8, 9, 16 and 17.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>S. 87° 49' W., bet. secs. 8 and 17.</p> <p>Over rolling terrain.</p>
40.705	<p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R74W</p> <p>S 8</p> <p>1/4 ———</p> <p>S 17</p> <p>2002</p> </div> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. diam., bears N. 69½° E., 62 lks. dist., mkd. 1/4 S8 BT.</p> <p style="padding-left: 40px;">A pine, 9 ins. diam., bears S. 2° W., 80 lks. dist., mkd. 1/4 S17 BT.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
81.41	<p>The cor. of secs. 7, 8, 17 and 18.</p> <hr/> <p>S. 88° 53' W., bet. secs. 7 and 18.</p> <p>Over gently rolling terrain.</p>
20.28	<p>Enter finger of reservoir, edge bears N. and S.</p>
20.38	<p>True point for the E. 1/16 sec. cor. of secs. 7 and 18, falls in finger of a reservoir where it is impracticable to establish a permanent monument.</p>
20.60	<p>Leave finger of reservoir, edge bears NNE. and SSW.</p>
21.20	<p>Point selected for the witness cor. to the E. 1/16 sec. cor. of sec. of secs. 7 and 18.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC T56N R74W S 7 E1/16 —————> S 18 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
26.10	Enter reservoir, edge bears NE. and SW.
32.10	Leave reservoir, edge bears NNE. and SSW.
40.76	<p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R74W S 7 1/4 ————— S 18 2002</p> <p>Set a steel fence post alongside the stainless steel post.</p>
52.60	SA Creek, course N.
79.71	<p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with a stainless steel post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.</p> <hr/> <p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0° 04' E., bet. secs. 7 and 8.</p> <p>Over rolling terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains									
40.13	<p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td>1/4</td><td></td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td>2002</td><td></td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 18 lks. S. of new fence extending ENE. and WSW.</p>	T56N	R74W	1/4		S 7	S 8	2002	
T56N	R74W								
1/4									
S 7	S 8								
2002									
80.26	<p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td>T56N</td><td>R74W</td></tr> <tr><td>S 6</td><td>S 5</td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td>2002</td><td></td></tr> </table> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, a position established by Donald F. Brady, Wyoming Registered Land Surveyor No. 5655, bears S. 2° 20' E., 3.94 chs. dist., monumented with a steel reinforcement rod, 24 ins. long, ¾ in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. LAND SURVEYING INC T56N R74W S5 S6 S7 S8 2001 PLS 5655. This position was established utilizing an abandoned fence extending E. and W. for latitudinal control which was determined to be unacceptable and is therefore not accepted as a careful and faithful reestablishment of the original cor. position. Mr. Brady granted permission to move his monument to the correct proportionate position, where it was deposited alongside the stainless steel post.</p>	T56N	R74W	S 6	S 5	S 7	S 8	2002	
T56N	R74W								
S 6	S 5								
S 7	S 8								
2002									

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	<p>From this same point, a position established by Duane A. Wamre, Wyoming Registered Land Surveyor No. 5149, bears S. 20° 28' E., 63 lks. dist., monumented with a steel reinforcement rod, $\frac{5}{8}$ in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. KADRMAS LEE & JACKSON. This position was established by single proportionate measurement methods rather than the correct method of double proportionate measurement and therefore is not accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr/> <p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 87° 55' W., bet. secs. 5 and 8.</p> <p>Over rolling and broken terrain.</p>
40.745	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T56N R74W S 5 1/4 ——— S 8 2002 </div> <p>Set a steel fence post alongside the stainless steel post.</p>
81.49	<p>The cor. of secs. 5, 6, 7 and 8.</p> <hr/> <p>S. 88° 41' W., bet. secs. 6 and 7.</p> <p>Over rolling and broken terrain.</p>
20.44	<p>Point for the E. 1/16 sec. cor. of secs. 6 and 7.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W S 6 E1/16 ——— S 7 2002
	Set a steel fence post alongside the stainless steel post.
40.88	Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R74W S 6 1/4 ——— S 7 2002
	Set a steel fence post alongside the stainless steel post.
	Cor. is located on steep N. slope, 29 lks. S. of draw, drains WSW.
79.64	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with a stainless steel post, 2½ ins. diam., as described in the 2002 field notes of the dependent resurvey, T. 56 N., R. 75 W.
	From the cor. of secs. 5, 6, 7 and 8.
	NORTH, bet. secs. 5 and 6.
	Over rolling and broken terrain.
40.13	Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains	
	T56N R74W 1/4 S 6 S 5 2002
	<p>Set a steel fence post alongside the stainless steel post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>From this point, a position established by Duane A. Wamre, Wyoming Registered Land Surveyor No. 5149, bears S. 5° 17' W., 30 lks. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, in a collar of stone, with aluminum cap mkd. KADRMAS LEE & JACKSON. This position was established by proportionate measurement from erroneous positions for controlling corners N. and S. and is not accepted as a careful and faithful reestablishment of the original cor. position.</p>
54.70	Road, scoria surfaced, bears SE. and NW.
60.195	Point for the N. 1/16 sec. cor. of secs. 5 and 6.
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T56N R74W N1/16 S 6 S 5 2002 </p>
	Set a steel fence post alongside the stainless steel post.
65.50	Enter reservoir, edge bears ESE. and WNW.
71.80	Leave reservoir, edge bears ENE. and WSW.
75.20	Fence, bears E. and W., enter gas processing plant.
80.77	Fence, bears ESE. and WNW., leave gas processing plant.
81.79	Point for the closing cor. of secs. 5 and 6, at intersection with the Fourteenth Standard Parallel North, determined longitudinally at record bearing from the cor. of secs. 5, 6, 7 and 8; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T57N	R74W
S 31	

S 6	S 5
T56N	R74W
CC	
2002	

Set a steel fence post alongside the stainless steel post.

From this point, a position established by Duane A. Wamre, Wyoming Registered Land Surveyor No. 5149, bears S. 89° 24' W., 28 lks. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set flush with the surface of the ground, with aluminum cap mkd. KADRMAS LEE & JACKSON. This position was established by proportionate measurement from erroneous controlling corners east and west and is not accepted as a careful and faithful reestablishment of the original cor. position.

The point for the 1/4 sec. cor. of sec. 5 only, T. 56 N., R. 74 W., is at midpoint on the N. bdy. of sec. 5.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T57N	R74W

1/4 S	5
T56N	R74W
2002	

Set a steel fence post alongside the stainless steel post.

From this point, the angle point marking the restored position of the original standard cor. of secs. 32 and 33, T. 57 N., R. 74 W., bears N. 87° 56' E., 13.62 chs. dist.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

Chains

From this same point, a position established by Duane A. Wamre, Wyoming Registered Land Surveyor No. 5149, bears S. 88° 39' W., 42 lks. dist., monumented with a steel reinforcement rod, $\frac{5}{8}$ in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. KADRMAS LEE & JACKSON. This position was established by proportionate measurement from erroneous controlling corners east and west and is not accepted as a careful and faithful reestablishment of the original cor. position.

The point for the 1/4 sec. cor. of sec. 6 only, T. 56 N., R. 74 W., is at proportionate distance on the N. bdy. of sec. 6.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T57N R74W

1/4 S 6
T56N R74W
2002

Set a steel fence post alongside the stainless steel post.

Cor. is located in wash, drains N.

From this point, the angle point marking the restored position of the original standard cor. of secs. 31 and 32, T. 57 N., R. 74 W., bears N. 88° 00' E., 17.22 chs. dist.

The point for the W. 1/16 sec. cor. of sec. 6 only, T. 56 N., R. 74 W., is at proportionate distance bet. the closing cor. of Tps. 57 N., Rs. 74 and 75 W. and the 1/4 sec. cor. of sec. 6 only, on the N. bdy. of sec. 6.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T57N R74W

W1/16 S 6
T56N R74W
2002

Set a steel fence post alongside the stainless steel post.

Dependent Resurvey of the Subdivisional Lines,
T. 56 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>Chains</p>	<p>From this point, the angle point marking the restored position of the original standard 1/4 sec. cor. of sec. 31, T. 57 N., R. 74 W., bears S. 88° 00' W., 1.31 chs. dist.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in the northwestern portion of Campbell County, approximately 45 miles north-northwest of Gillette, Wyoming. The terrain varies from gently rolling to rolling and broken, with the elevation ranging from about 3,800 feet to about 4,250 feet above sea level. The soil is primarily sandy loam. The vegetation consists of sagebrush and native and domestic grasses and there are patches of timber (pine and juniper) scattered throughout the northern portion of the township.</p> <p>Drainage is provided by SA and Bitter Creeks which flow intermittently in a northerly direction. The majority of the township is utilized in large ranching operations with only one inhabited home in the area surveyed. There has been extensive oil exploration in the past and the area is currently undergoing gas exploration and development resulting in many wells being drilled and pipelines laid.</p> <p>Access is provided by Greenough Road, supplemented by numerous roads that service the oil and gas fields and provide good access into the township.</p>
----------------------	---

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

FIELD ASSISTANTS


NAMES	CAPACITY
Terry W. Kessel	Surveying Technician
David L. Meserve	Surveying Technician
Trudy A. Wadley	Surveying Aid

CERTIFICATE OF SURVEY

I, Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of February, 2001, I have dependently resurveyed the Fourteenth Standard Parallel North, through Range 74 West, the south boundary and the subdivisional lines, Township 56 North, Range 74 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 24 2004

(Date)

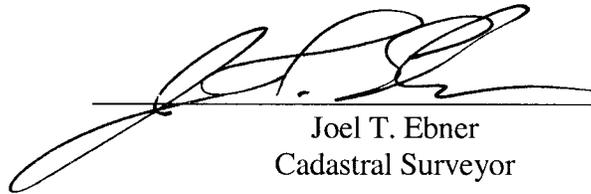

Joel T. Ebner
Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of the Fourteenth Standard Parallel North, through Range 74 West, the south boundary and the subdivisional lines, Township 56 North, Range 74 West, of the Sixth Principal Meridian, in the State of Wyoming, executed by Joel T. Ebner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

SEP 24 2004

(Date)

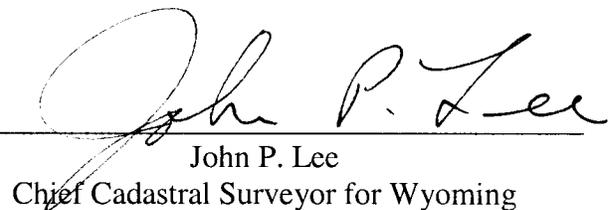

John P. Lee
Chief Cadastral Surveyor for Wyoming