


7626

ORIGINAL

TOWNSHIP 52 NORTH, RANGE 64 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.
CORRECTIVE DEPENDENT RESURVEY

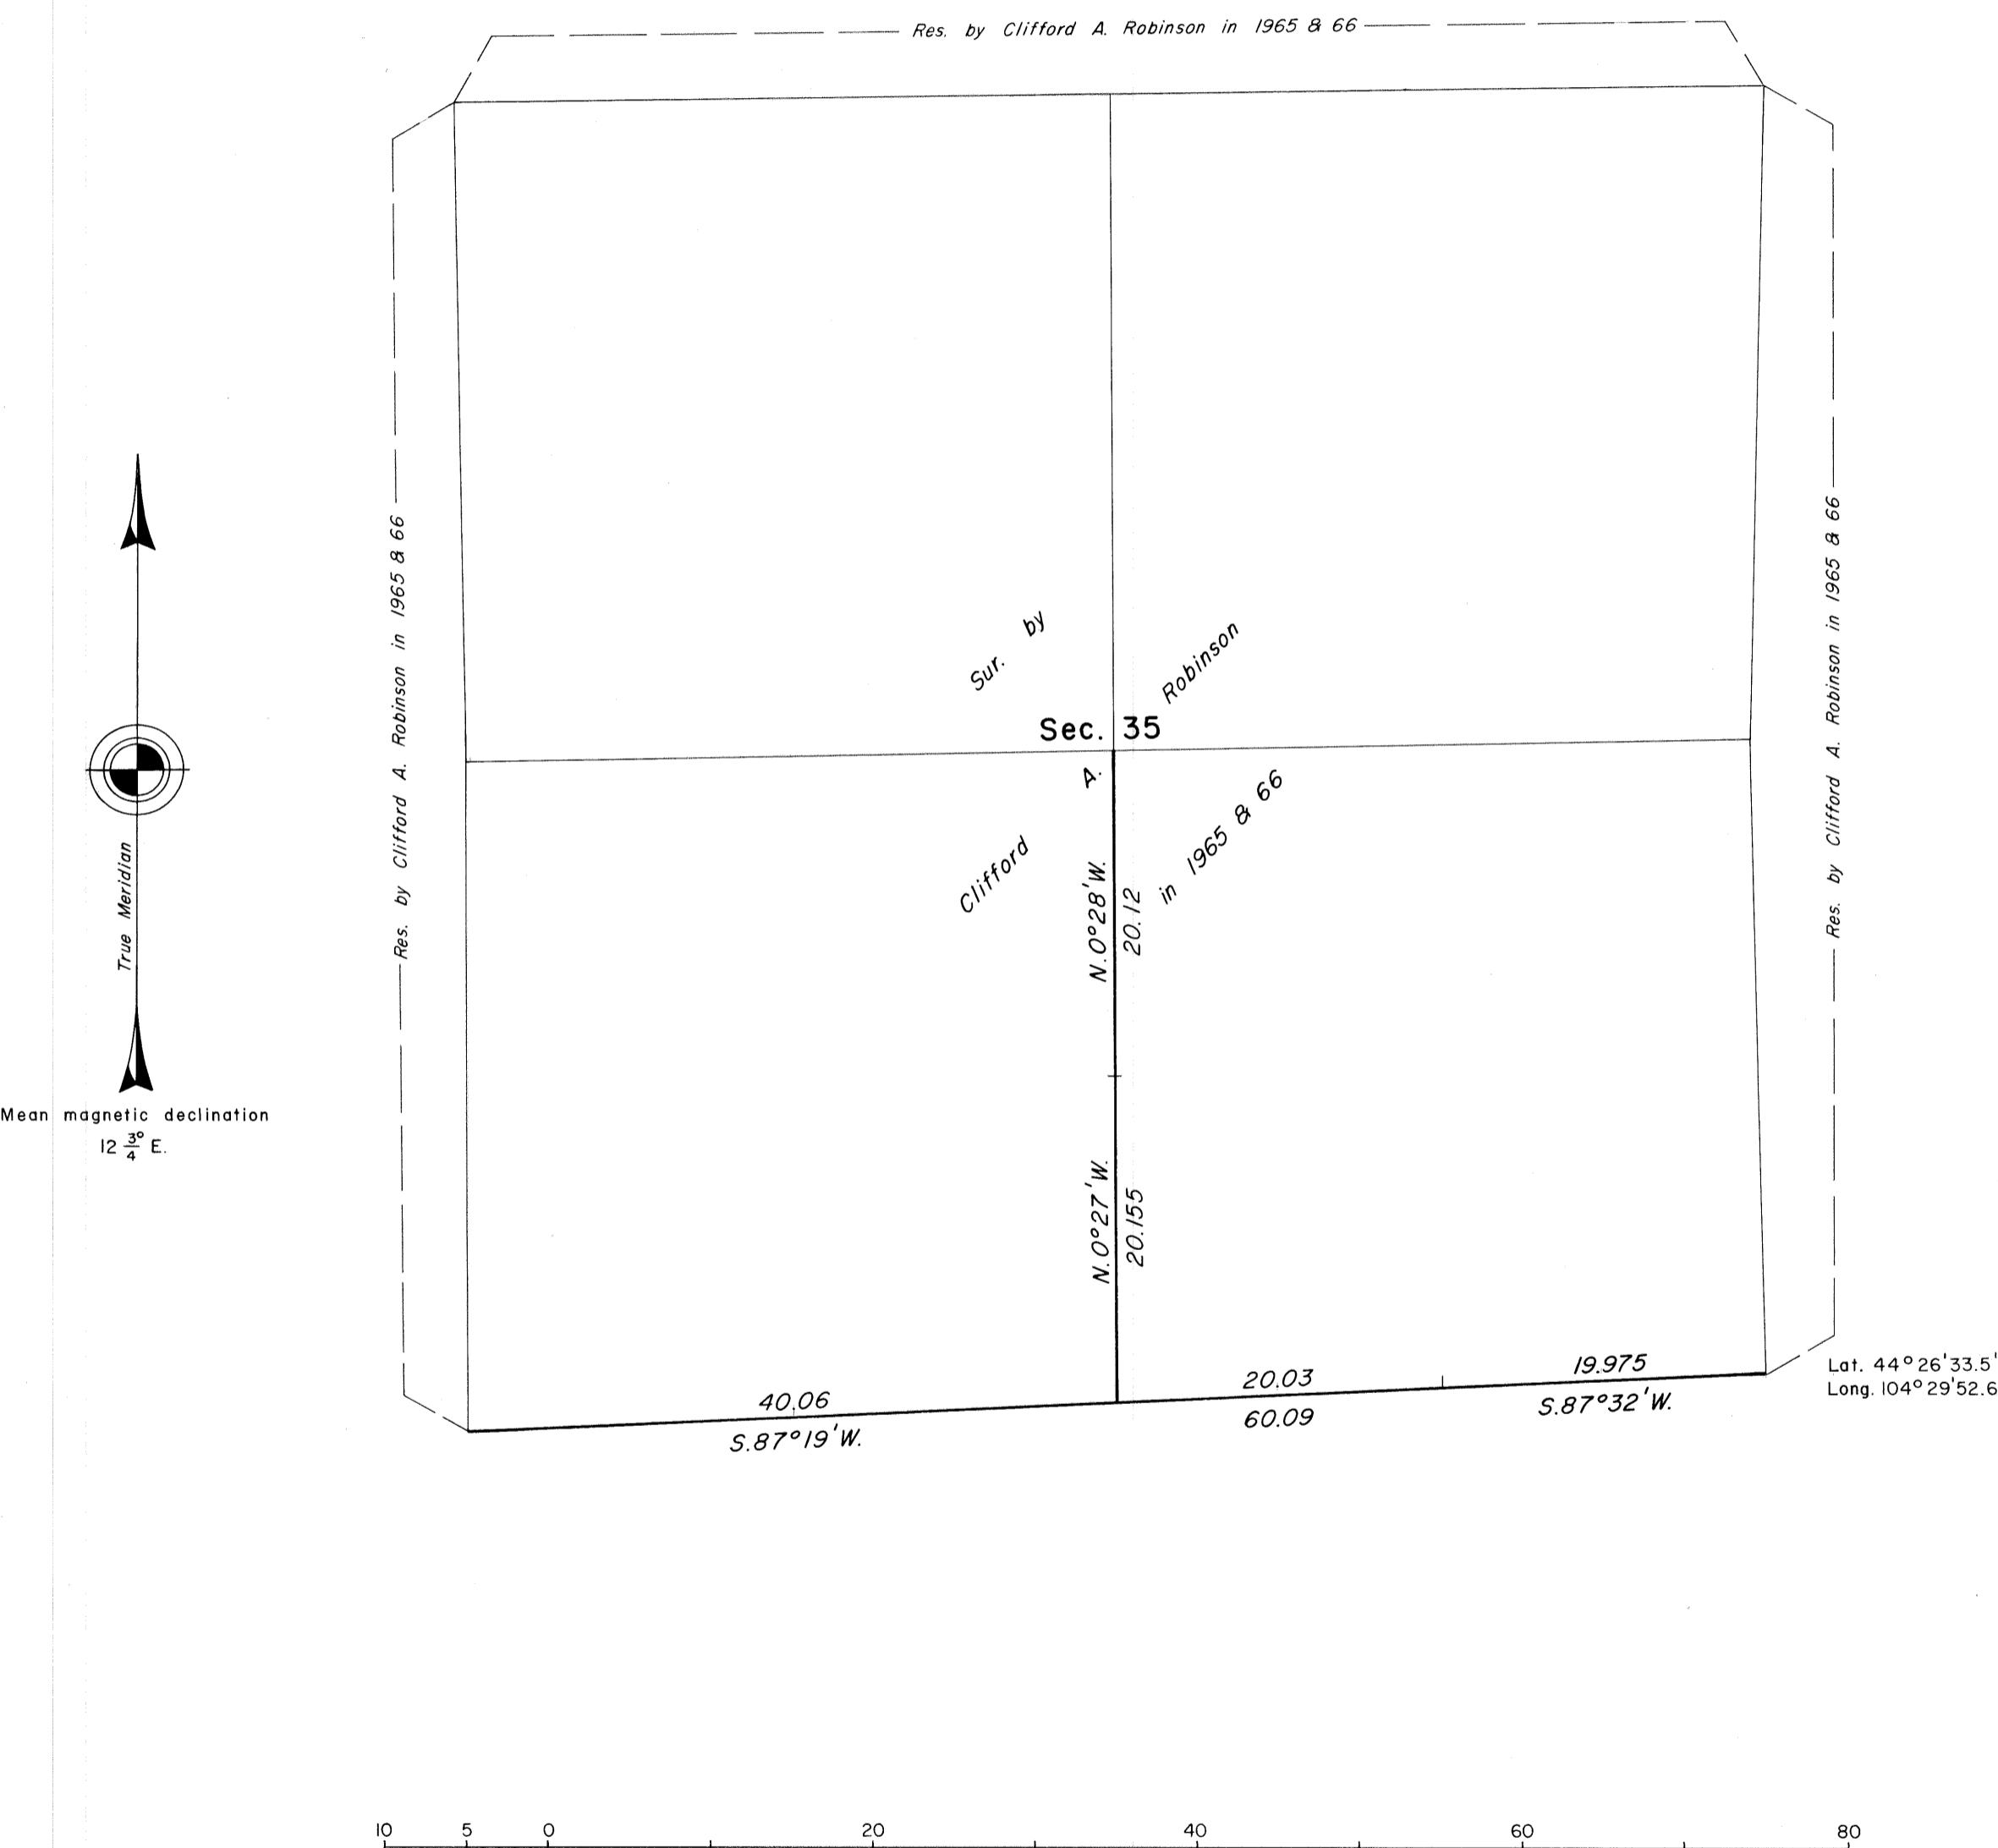

A history of surveys is contained in the field notes.

This plat represents the corrective dependent resurvey of a portion of the south boundary, and a portion of the north and south center line of section 35, designed to restore the $\frac{1}{4}$ section corner in its true original location according to the best available evidence, T. 52 N., R. 64 W., Sixth Principal Meridian, Wyoming.

The lottings and areas are as shown on the plat approved October 4, 1882.

Survey executed by William H. Herbst,
Supervisory Cadastral Surveyor, beginning
November 16, 1981, and completed November 18,
1981, pursuant to Special Instructions dated
November 10, 1981, for Group No. 432, Wyoming.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming February 3, 1983

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Richard L. Dakes

Chief Cadastral Surveyor

10 5 0 20 in 40 Chains 60 80

W.H.B.

919 B

TOWNSHIP 52 NORTH, RANGE 64 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

CORRECTIVE DEPENDENT RESURVEY

SURVEY INFORMATION AND CERTIFICATE

The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with a steel fence post alongside, with brass cap mkd.

T52N R64W
S 7 S 8
S 18 S 17
1966

7 8
18 17

39 1/4
19.57

Point for the N. 1/16 sec. cor. of secs. 17 and 18.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T52N R64W
N 1/16
S 18 S 17
1995

from which

A pine, 9 ins. diam., bears N. 35° W., 16 lks. dist., mkd. N 1/16 S 18 BT.

Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

From this point, an iron post, 2 1/2 ins. diam., as described in the field notes of the 1966 dependent resurvey, bears N. 0° 34' E., 2.33 chs. dist. I mark the brass cap AM in large letters, and efface the mks. on the 1966 bearing tree.

N 1/16

N. 0° 34' W.
19.57

1/4
18 17

The 1/4 sec. cor. of secs. 17 and 18, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd.

T52N R64W
1/4
S 18 S 17
1966

from which

A pine, 12 ins. diam., bears S. 83° E., 32 lks. dist., with illegible scribing on partially healed blaze.

This plat represents the entire record of the corrective dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence.

The position of the N. 1/16 sec. cor. of secs. 17 and 18, was purported as not conforming to the official record by letter dated October 20, 1995 from James D. Walker, NJS Engineering, Spearfish, South Dakota. A field investigation substantiated the purported findings. A corrective dependent resurvey is described in detail herein.

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated October 31, 1995, for Group No. 613, and assignment instructions dated November 3, 1995.

Louis F. Stahle surveyed the subdivisional lines in 1881. Clifford A. Robinson dependently resurveyed a portion of the subdivisional lines in 1965-66.

The lottings and areas are as shown on the plat approved October 4, 1882.

Survey executed by Lynn A. Forbes, Cadastral Surveyor, beginning November 27, 1995 and completed November 27, 1995.

The direction of the lines refer to the true meridian as determined by the dependent resurvey plat of 1965-66 and carried forward by sustained angulation. Measurements were made using a WILD theodolite, Model T-1000, a WILD electronic distance meter, Model DI-2000 and by chaining methods. The instruments were maintained in proper adjustment at all times.

The geographic position (NAD 27) of the 1/4 corner of sections 17 and 18, as scaled from U.S. Geological Survey Quadrangle Map "THE ROCKS, WYOMING", 1984 is as follows:

Latitude: 44°29'34"N. Longitude: 104°34'43"W.

Field assistants were James D. Claflin Cadastral Surveyor, and Ryan R. Lorenzen, Surveying Technician.

The area embraced by this survey is situated approximately 30 miles northwest of Sundance Wyoming. Access is provided by U.S. Highway 14, county roads and trails through the area. Vegetation consists of pine and oak forests.

I, Lynn A. Forbes, Cadastral Surveyor, certify that the corrective dependent resurvey of a portion of the subdivisional lines was executed by me and under my direction as described above and as shown on this plat.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming April 23, 1996


This plat, of field notes and survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee
Chief Cadastral Surveyor for Wyoming

April 23, 1996
(Date)


Lynn A. Forbes
Cadastral Surveyor




W.H.B.


OFFICIALLY FILED: June 10, 1996

TOWNSHIP 52 NORTH, RANGE 64 WEST OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.
DEPENDENT RESURVEY

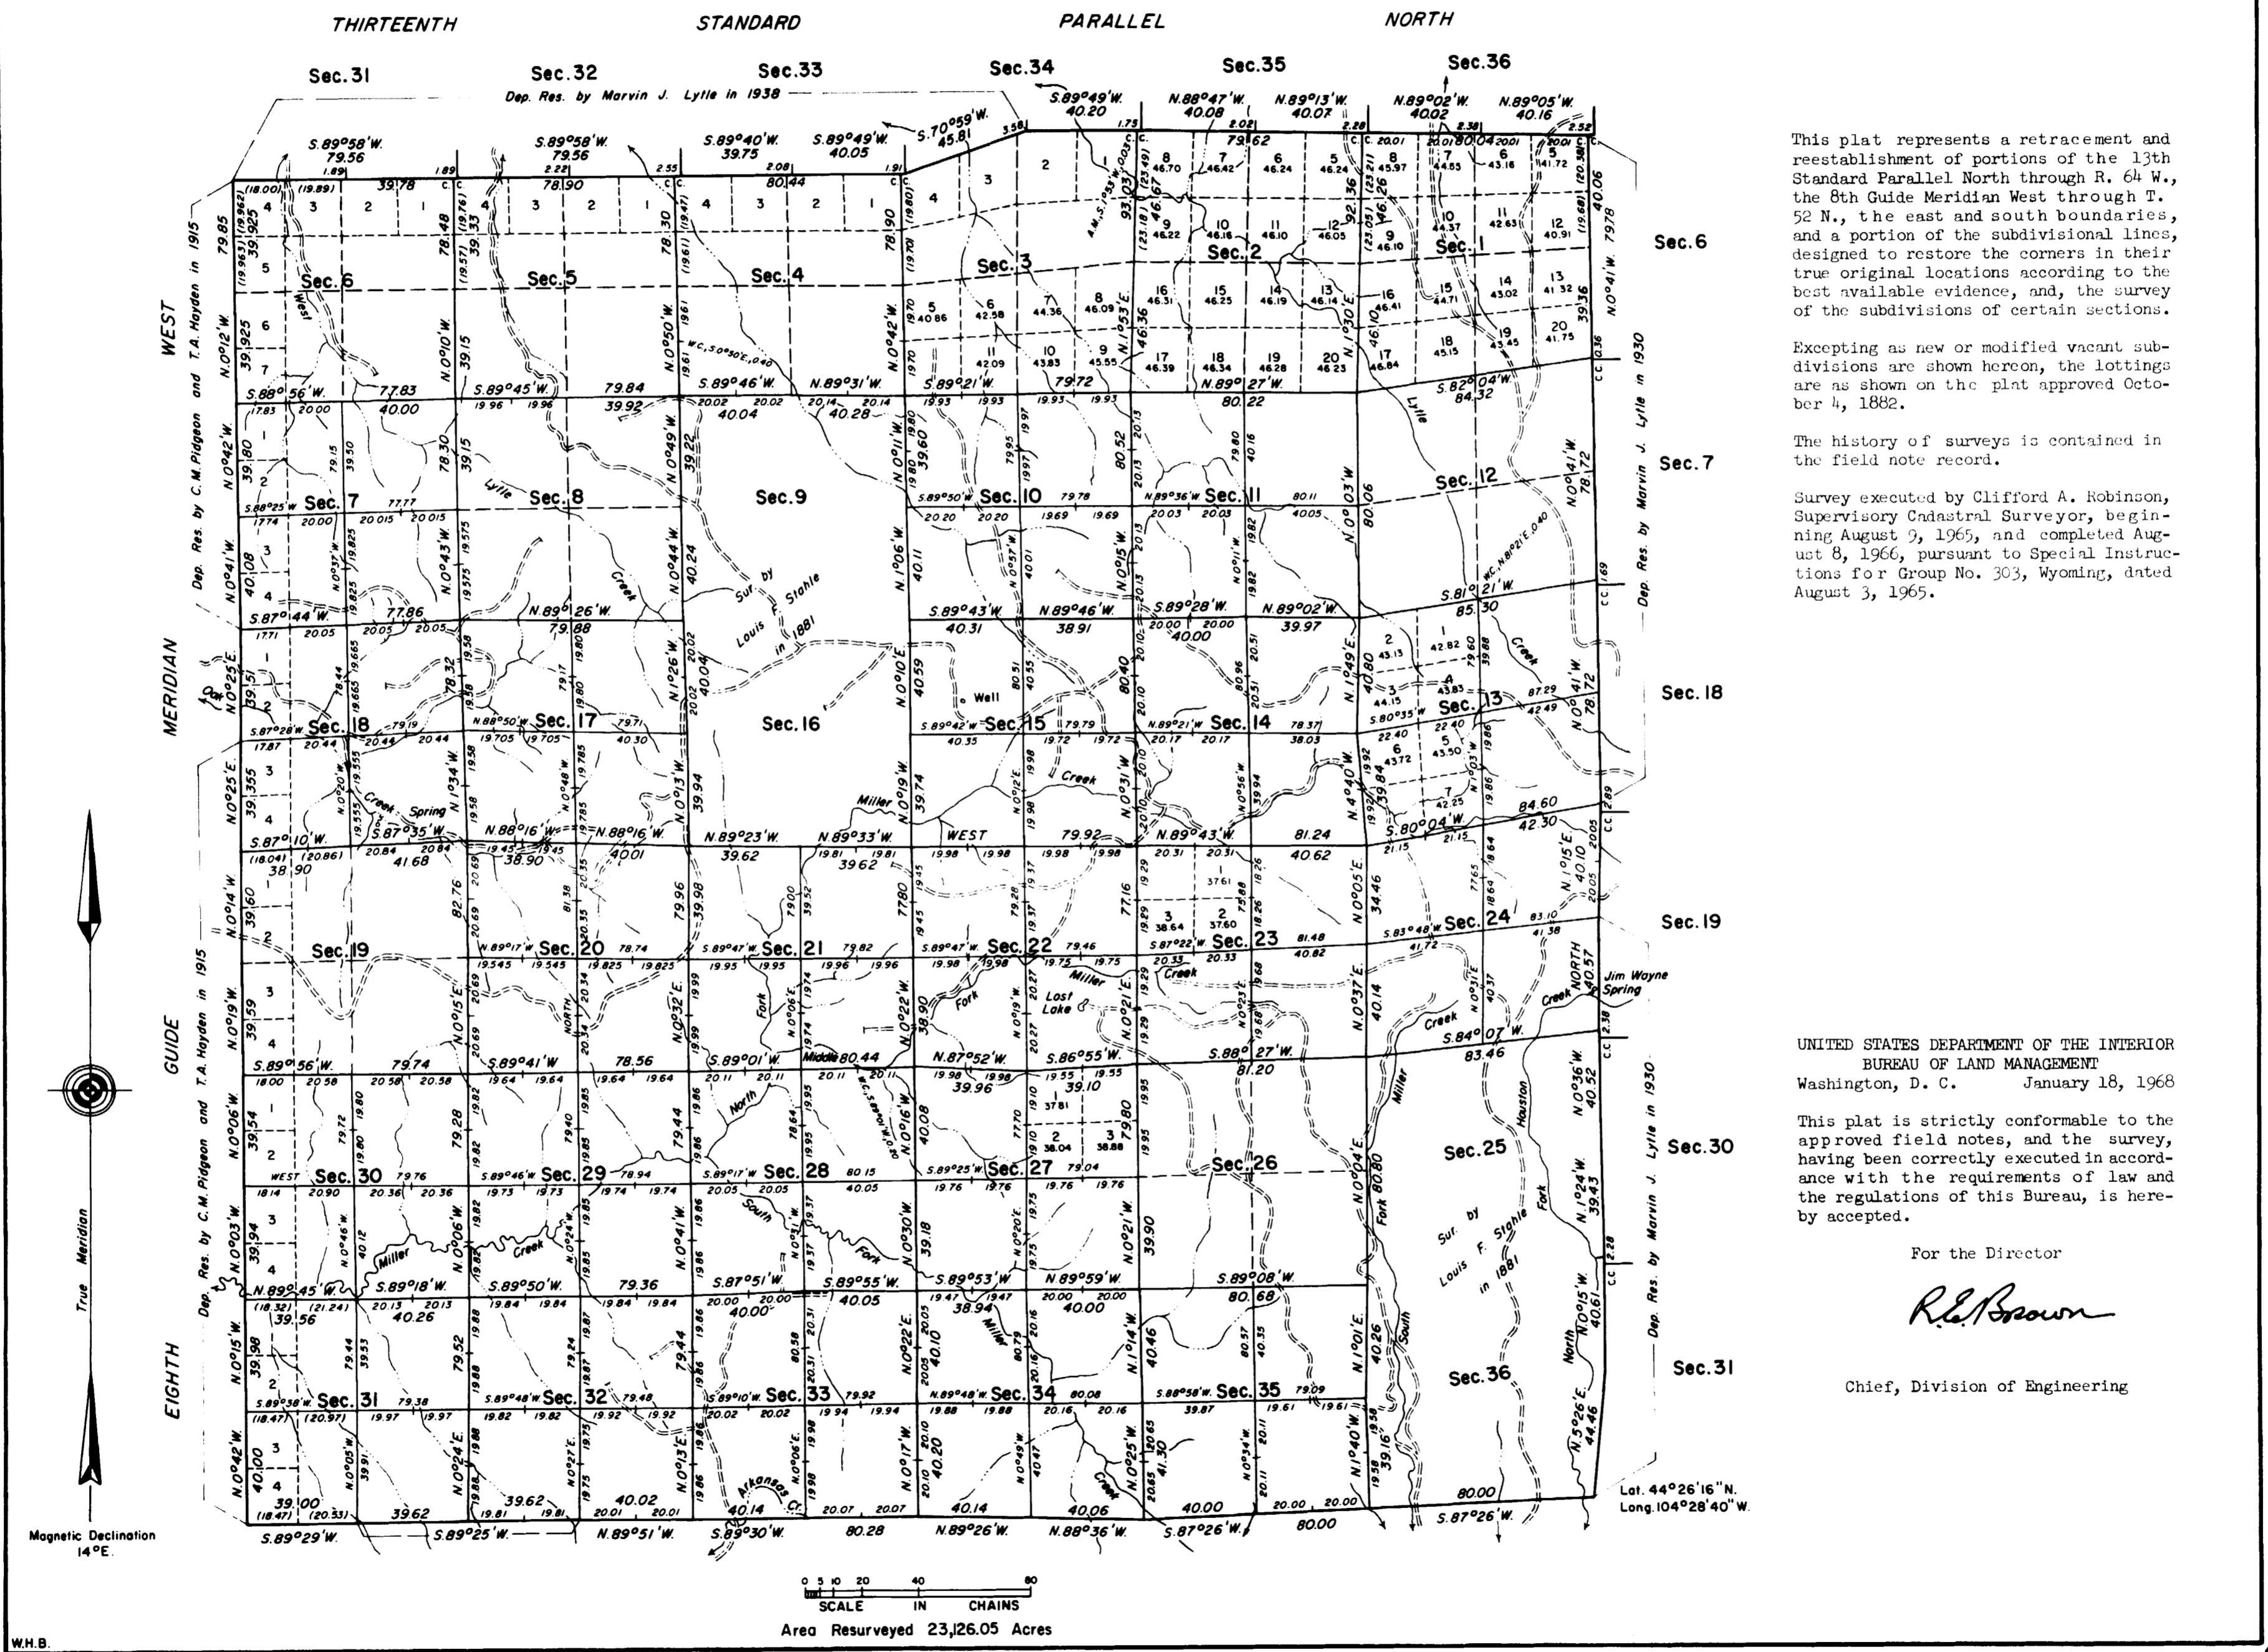

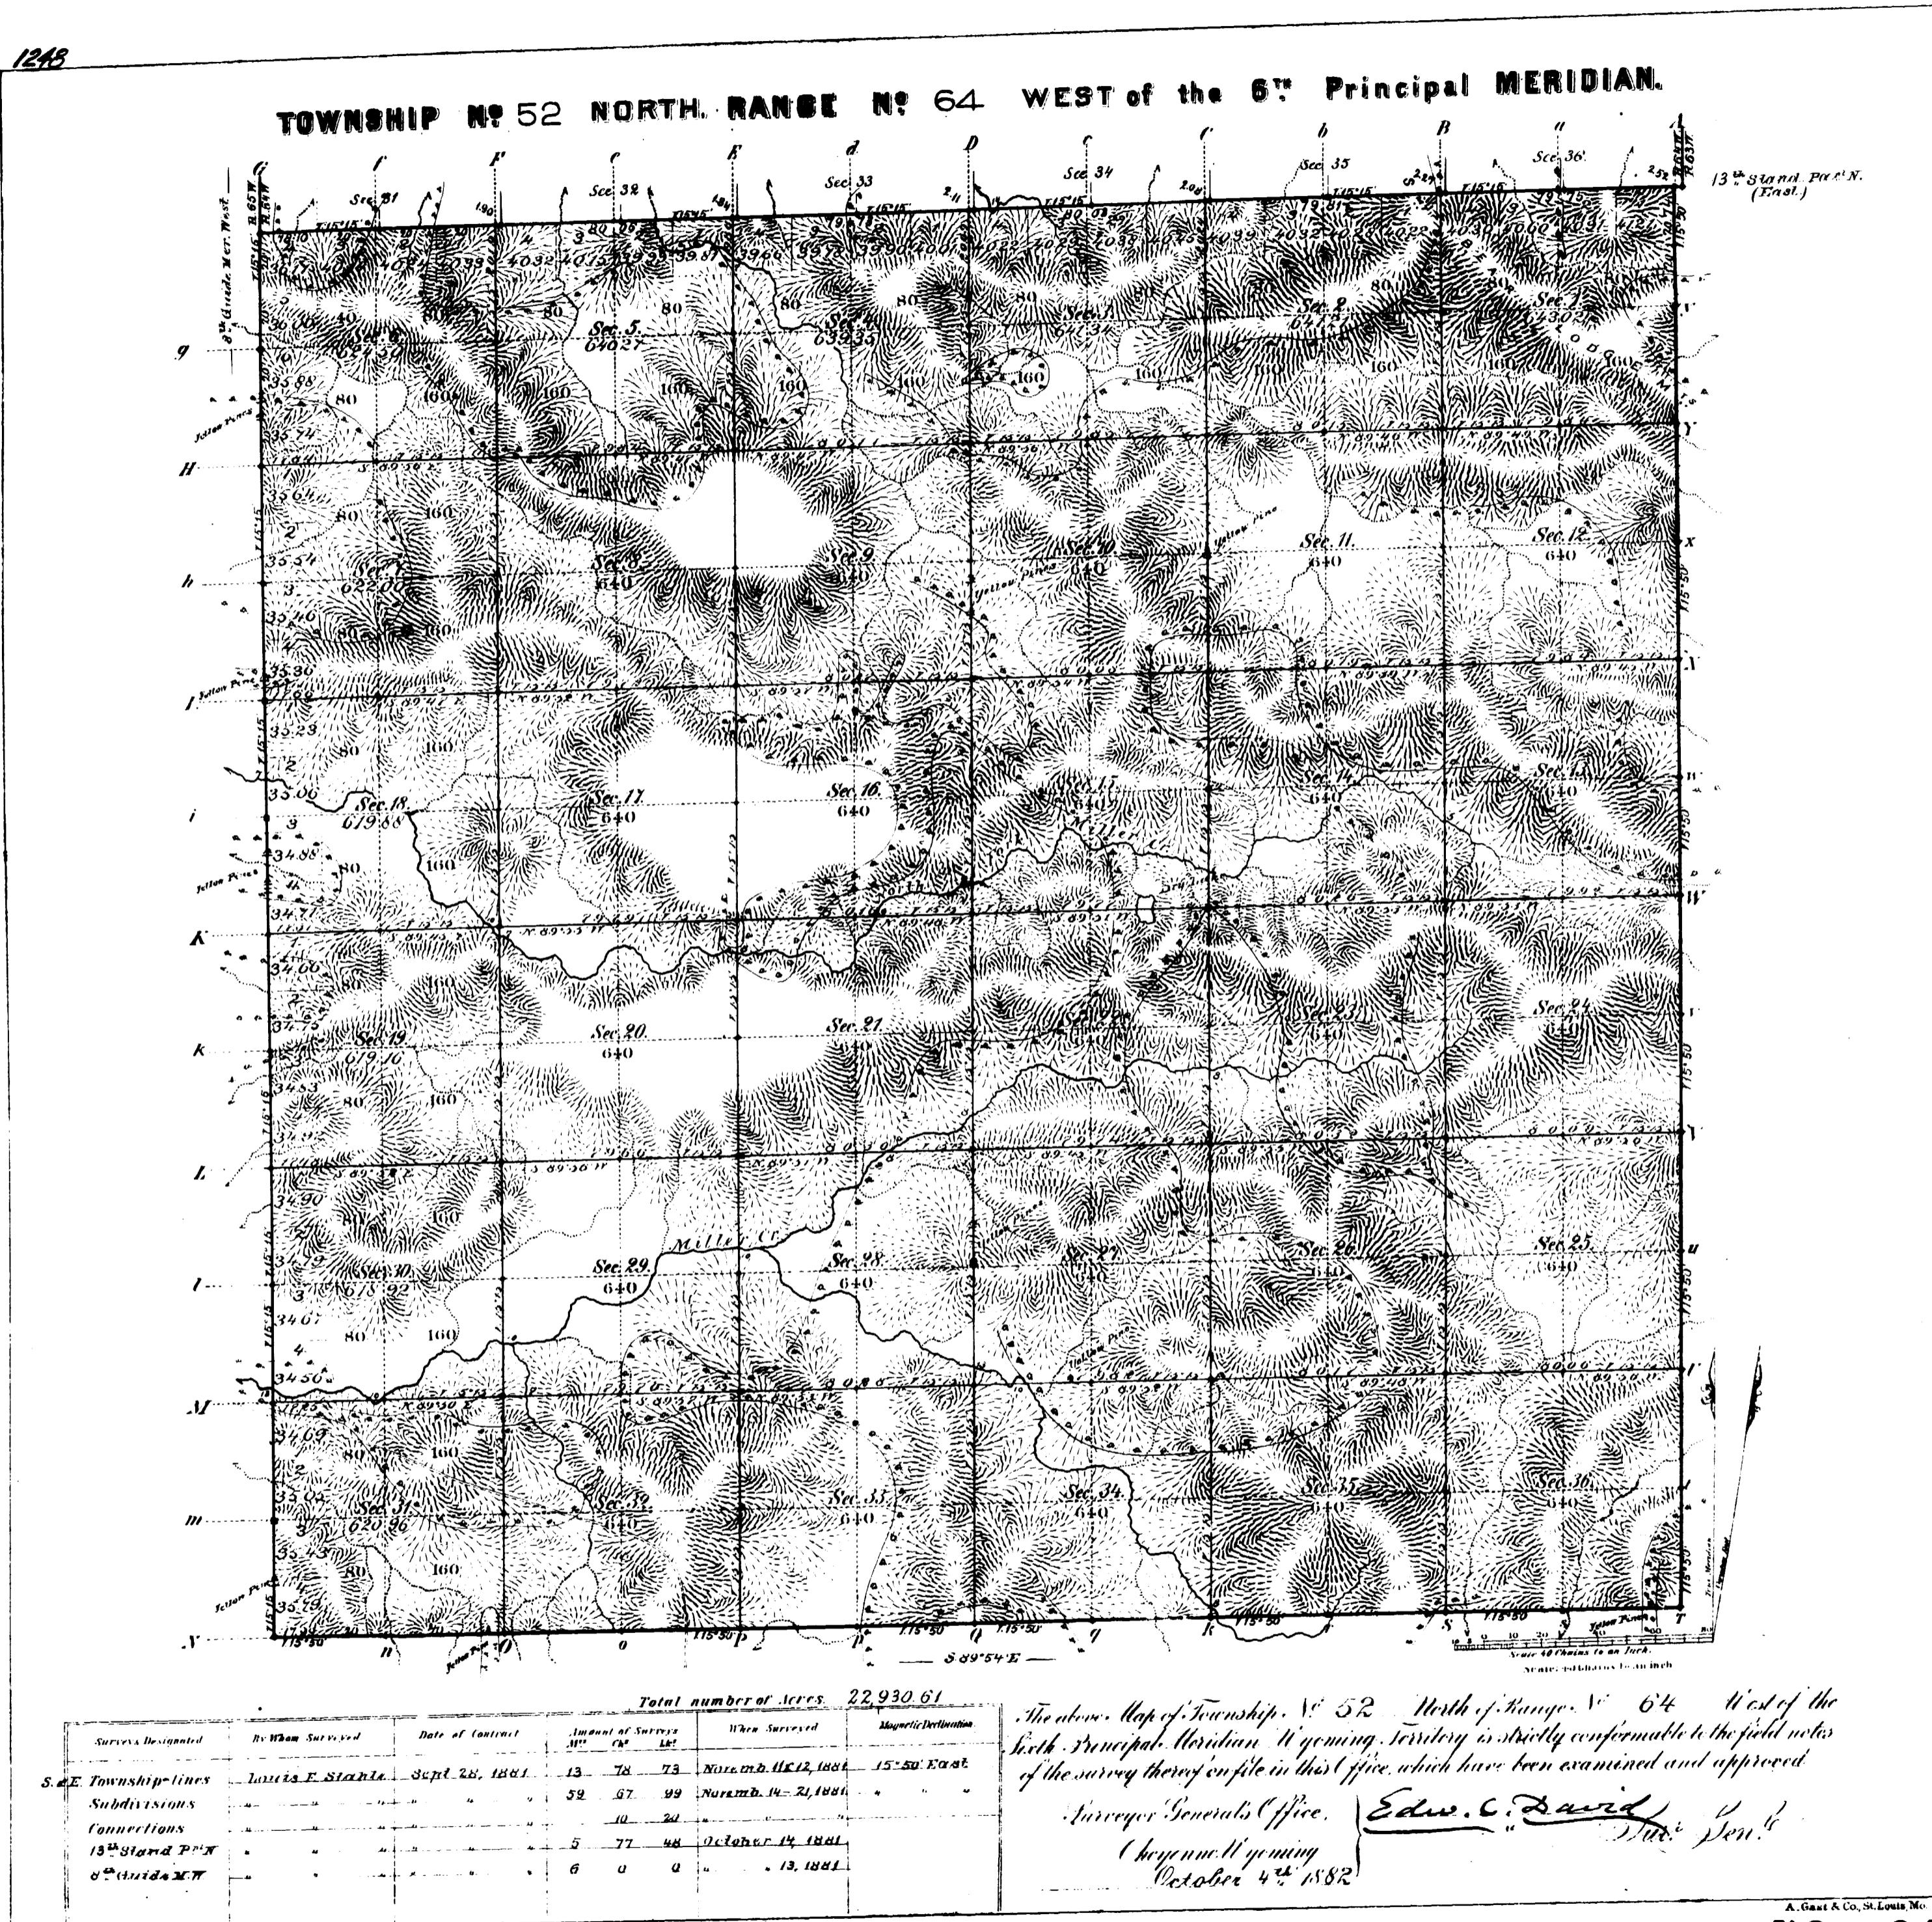

5283

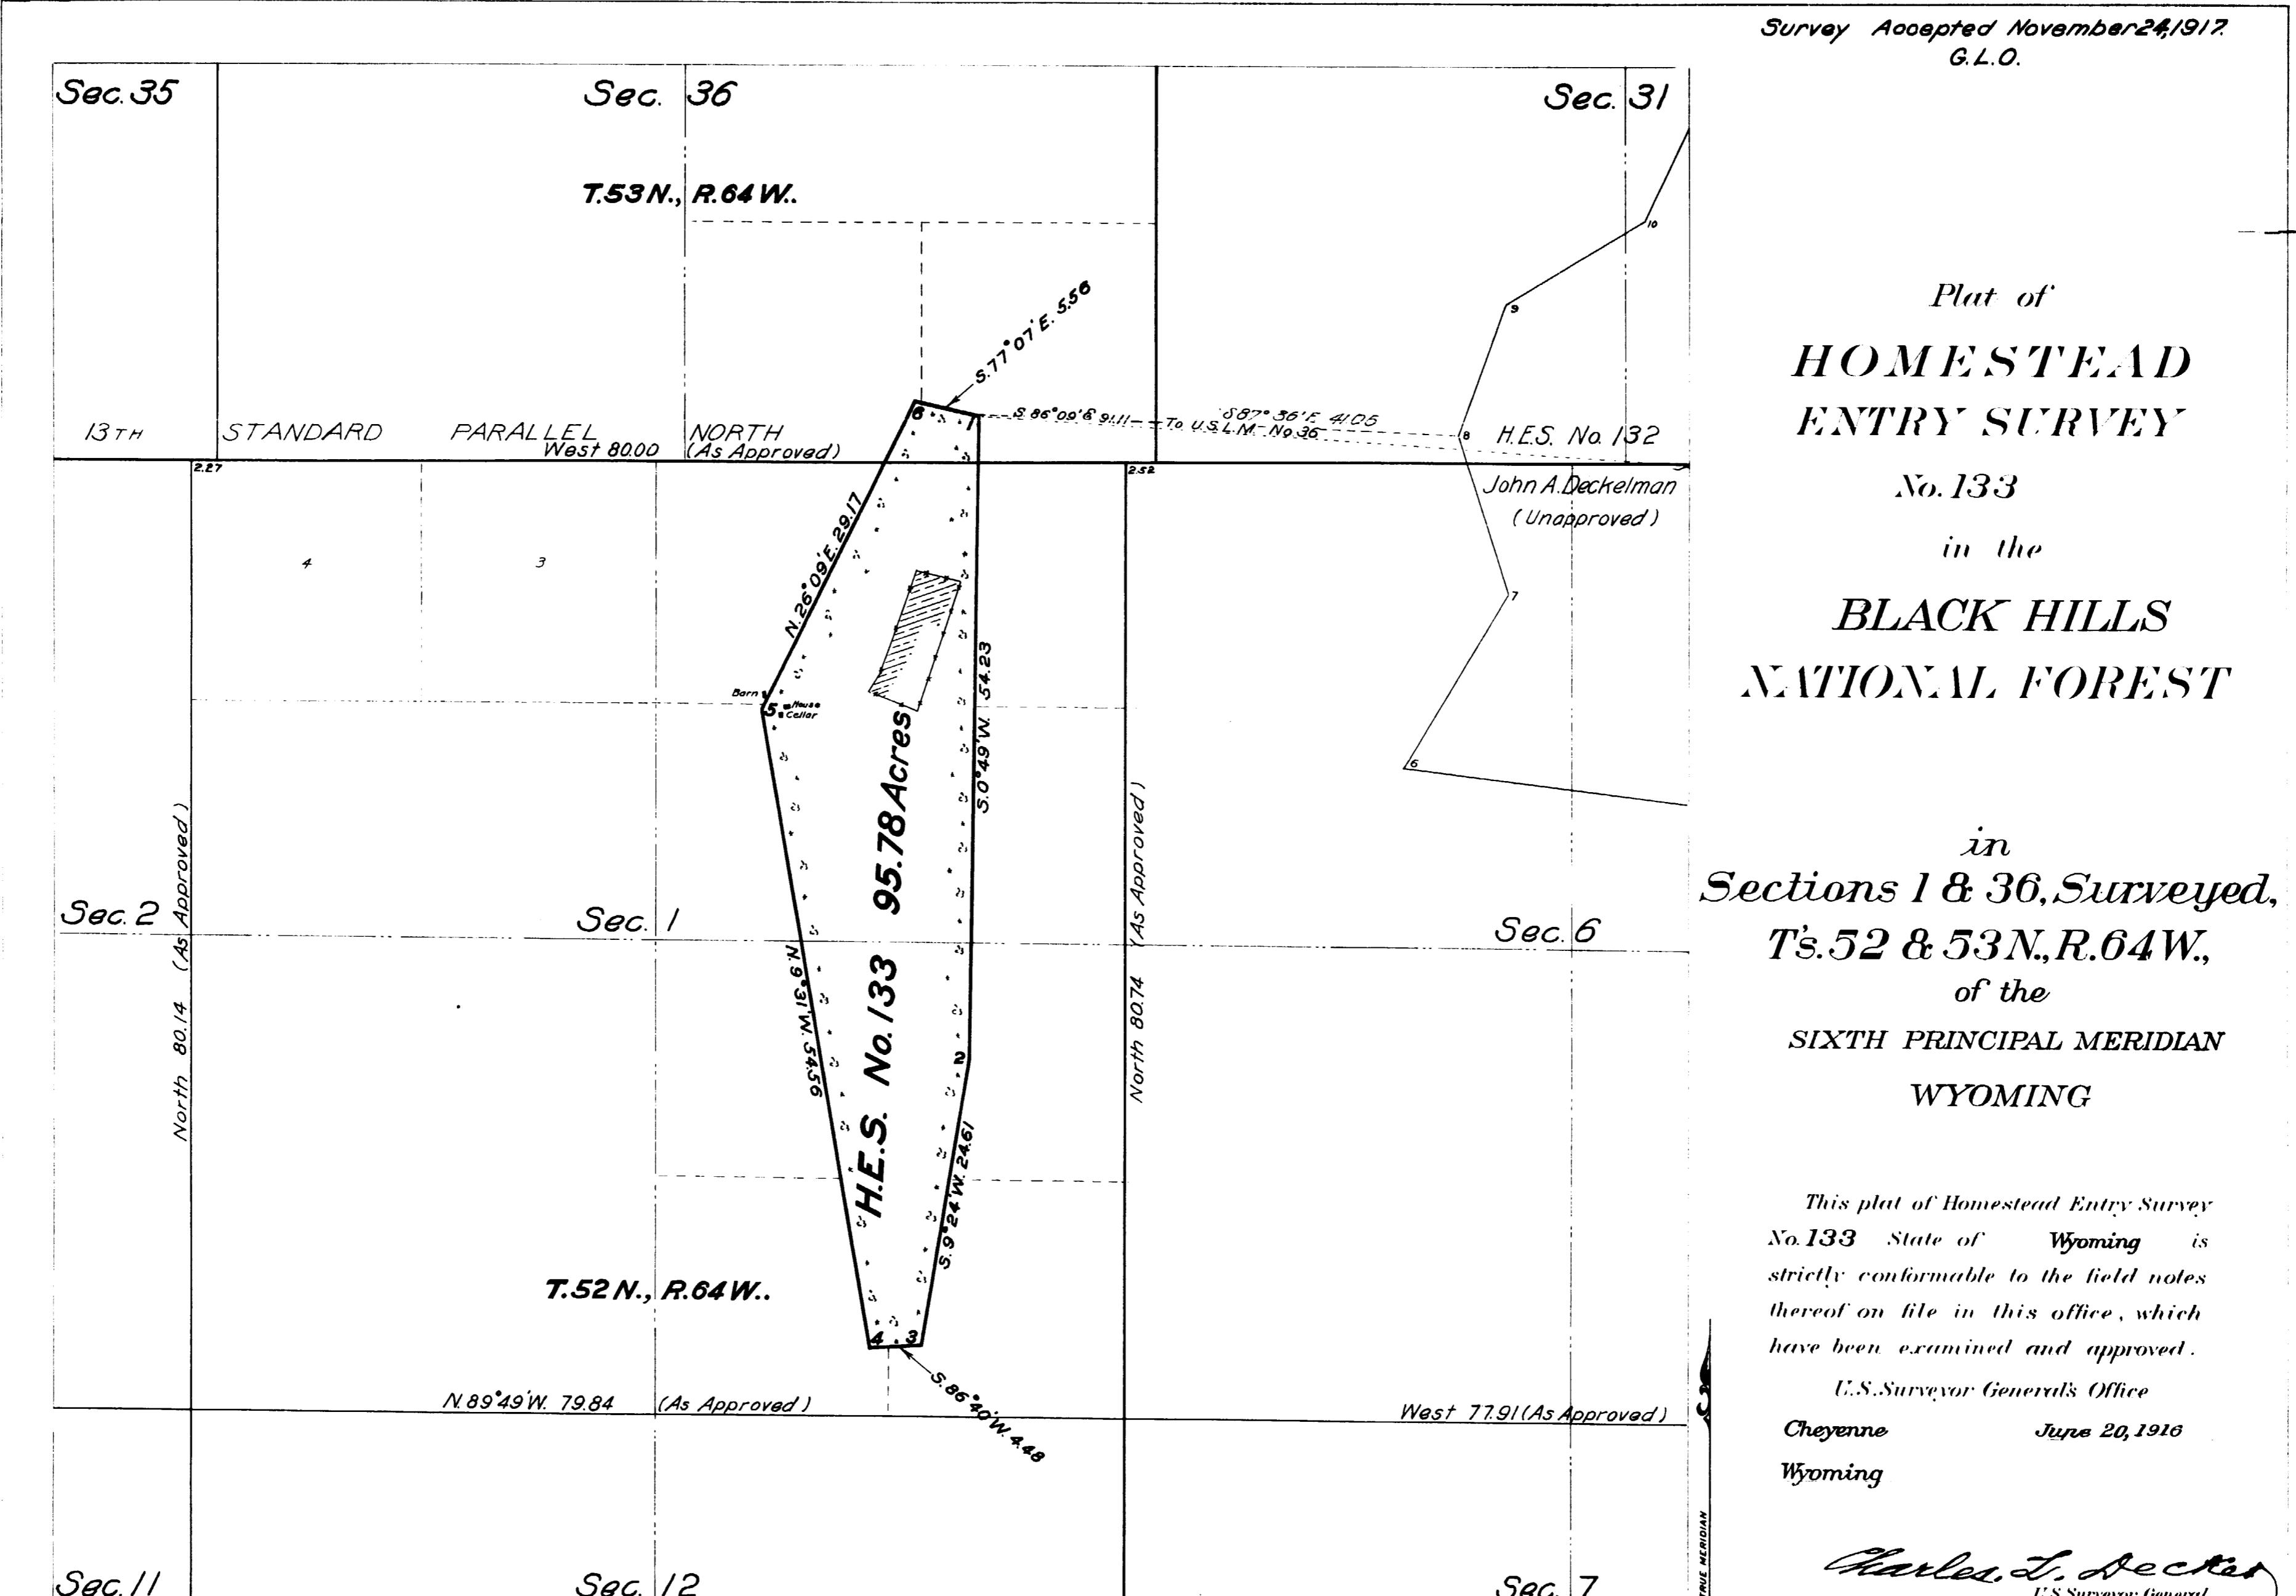

Survey Designated	By whom Surveyed	Inst. Cont. Group No.	Date	When Surveyed	Date of Approval
H.E.S. No. 133	W.Chester Campbell Surveyor General Service	133	May 10, 1915	June 14, 1915 June 16, 1915	June 20, 1915
H.E.S. No. 132	"	"	May 12, 1915	June 9, 1915 June 11, 1915	
Subdivisions T.52N, R.64W. Lewis E. Stahle	"	"	Sept 28, 1881	Nov 14, 1881 Nov 21, 1881	October 4, 1882
N and E bdy's. " " "	"	"	"	Oct 14, 1881 Nov 12, 1881	July 26, 1882
Subdivisions T.53N, R.64W. N.J. Burnham	"	"	Oct 20, 1881	March 20, 1882 March 28, 1882	July 18, 1883
E bdy. " " "	"	"	"	Nov 26, 1881	Nov 26, 1881 June 11, 1883

Areas in Acres	
H.E.S. Survey No. 133	Conflicts
In Section	
Total	95.78

Act of June 21, 1906	Act of June 30, 1914
List No. 2-1066	Dated Feb. 6, 1911
Latitude 44° 32' N	Observations at
Longitude 104° 29' W	Corner No. 1
Mean Mag. Decl. 15° 44' E	

ENT. NO. -----	NOTES
PAT. NO. -----	V.-----
C. S. NO. -----	P.-----

Cancelled by order # 10. 21 T. (12 3 9 5 9 9)
dated Oct 25, 1918. Grants sundance
Oct 25, 1918

133


Indexer
(44)

accession no. 1265

96

8TH GUIDE MERIDIAN WEST

From the 12th to the 18th Standard Parallels North between Range 64 and 65 West of the 6th Principal Meridian

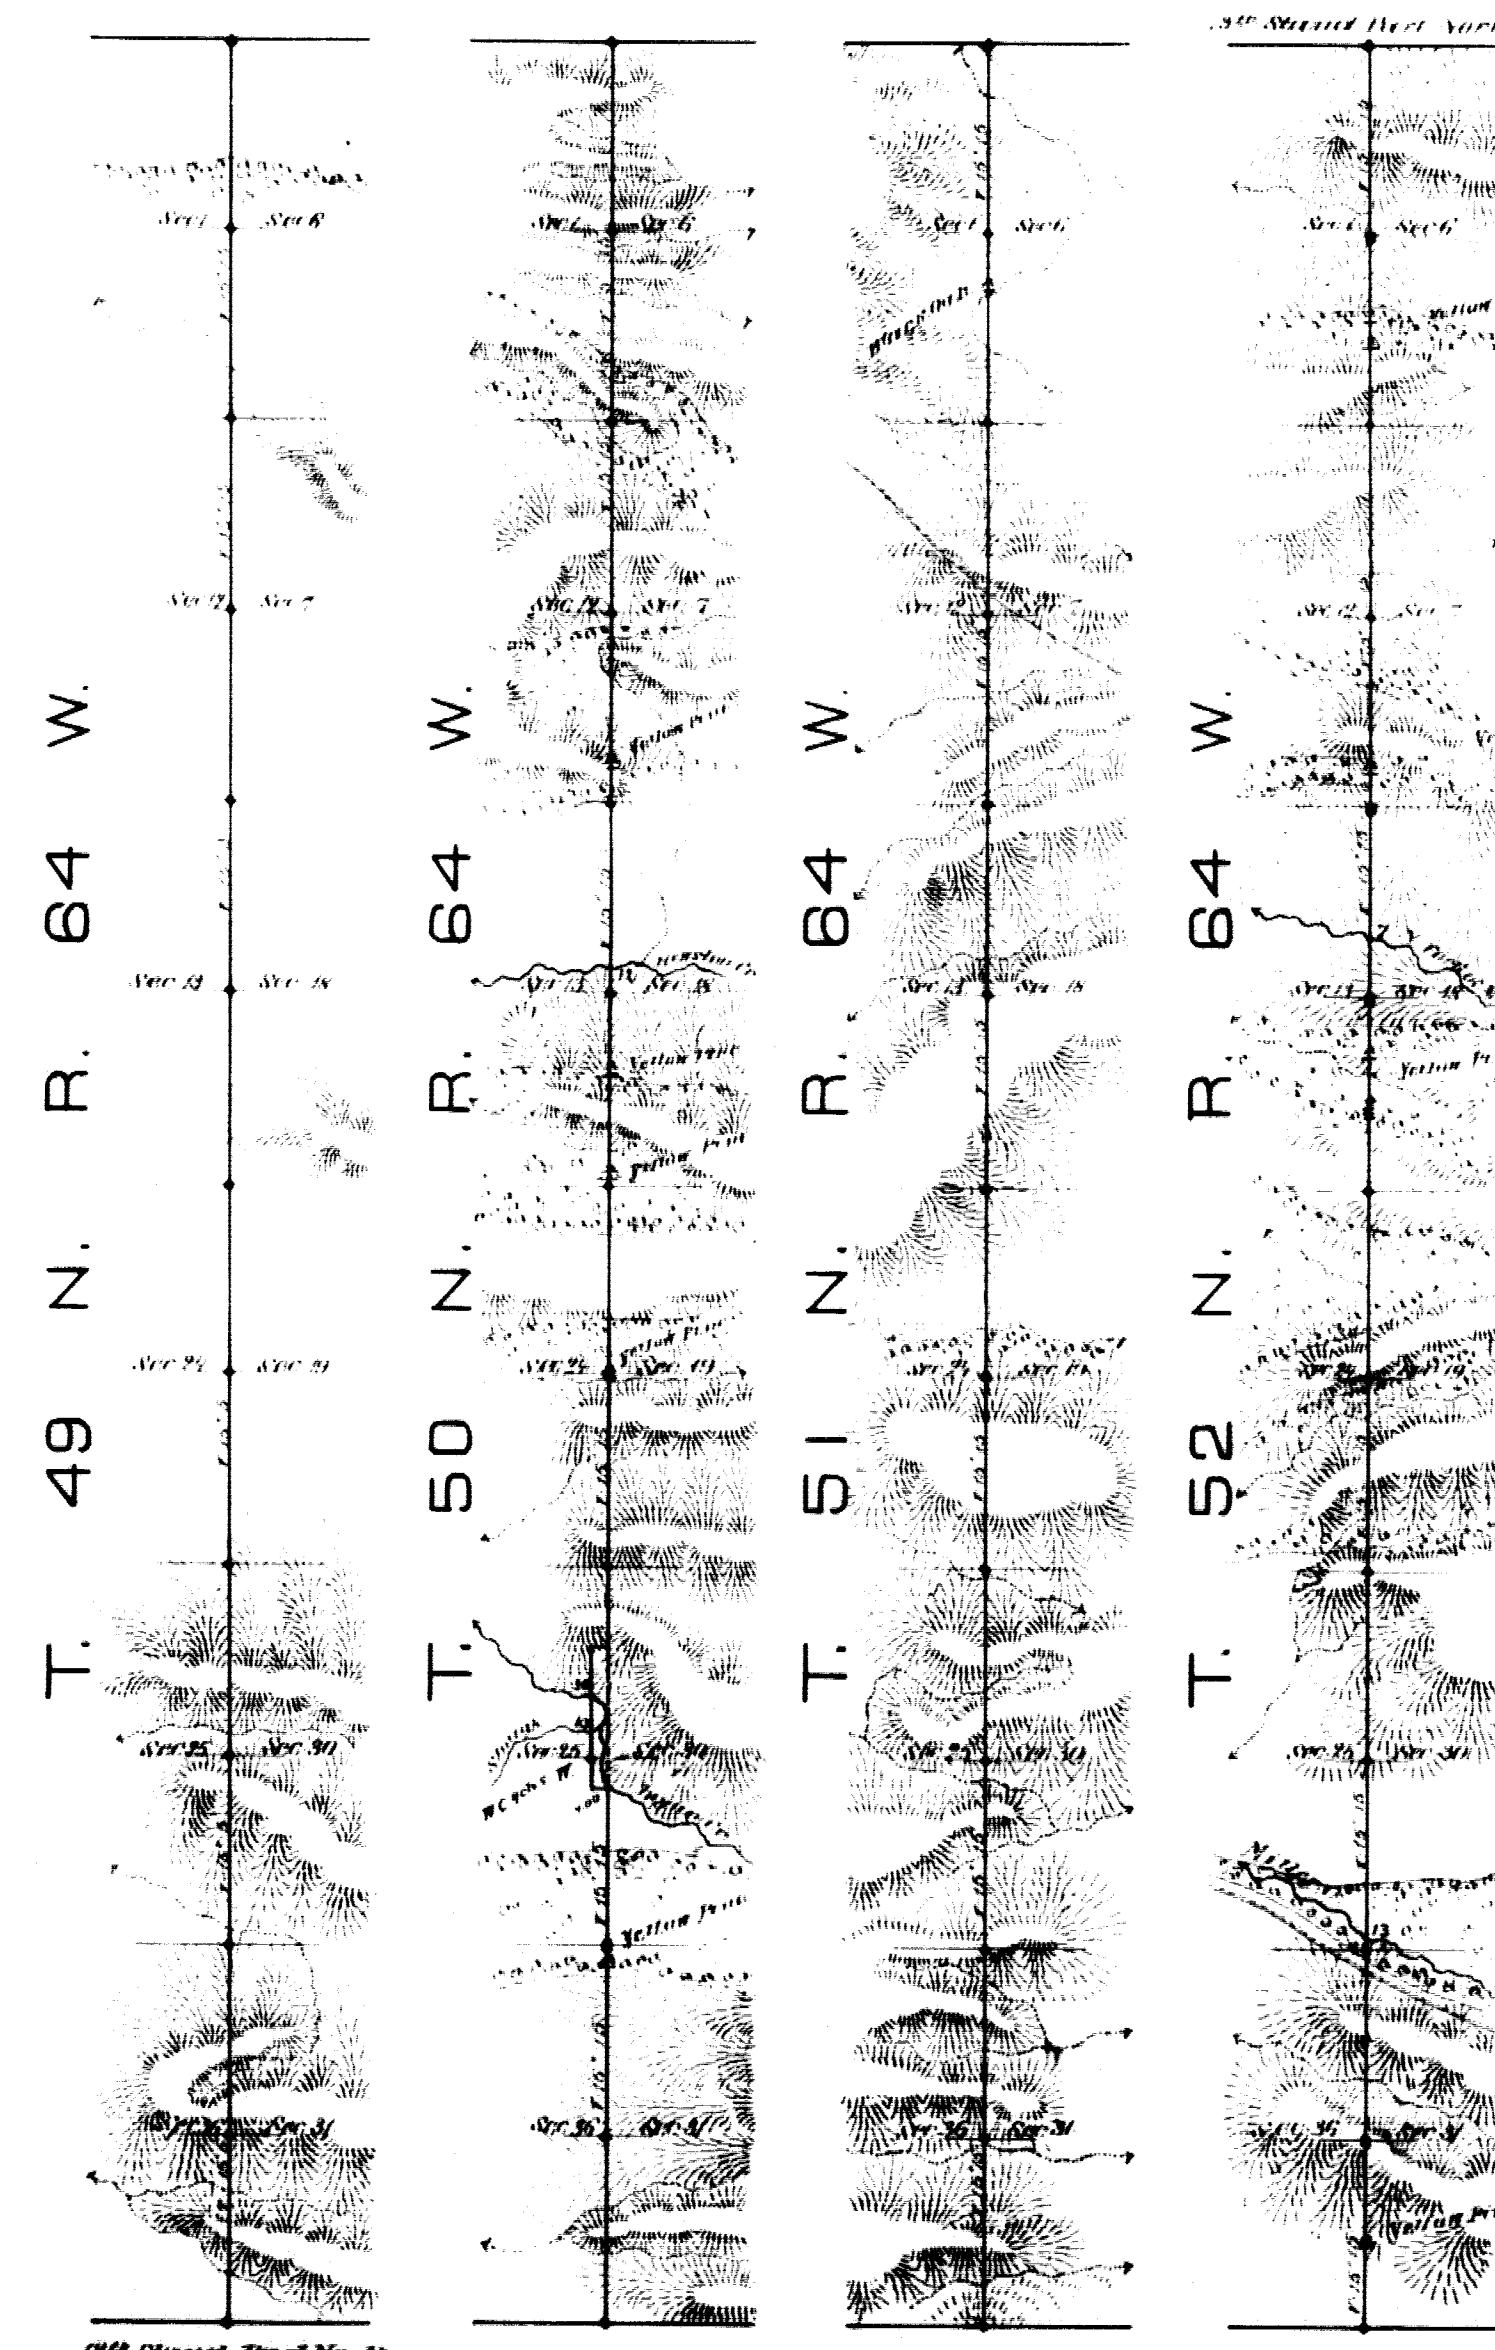

State 40 chains to one inch

Magnetic Variation East

Surveyor Designated by whom surveyed	Date of Contract	Amount of Surveyed	When Surveyed
8 th Guide Merid. W. - Louis F. Shantz	September 22, 1881	24 q. a.	October 10 to 18, 1881

I hereby certify that the above diagram of the 8th Guide Meridian West from the 12th to the 18th Standard Parallels North, between Ranges 64 & 65 West of the 6th Principal Meridian, Bounding Variation is strictly conformable to the field notes of the Surveyor therein, divided in this Office, which have been examined and approved.
Surveyor General's Office
Chicago, Ill., Oct. 4th, 1882.

Edw. C. Davis
Surveyor General

June 25


(4)

1266

97

EXTERIOR LINES.

Scales indicate each mile for East

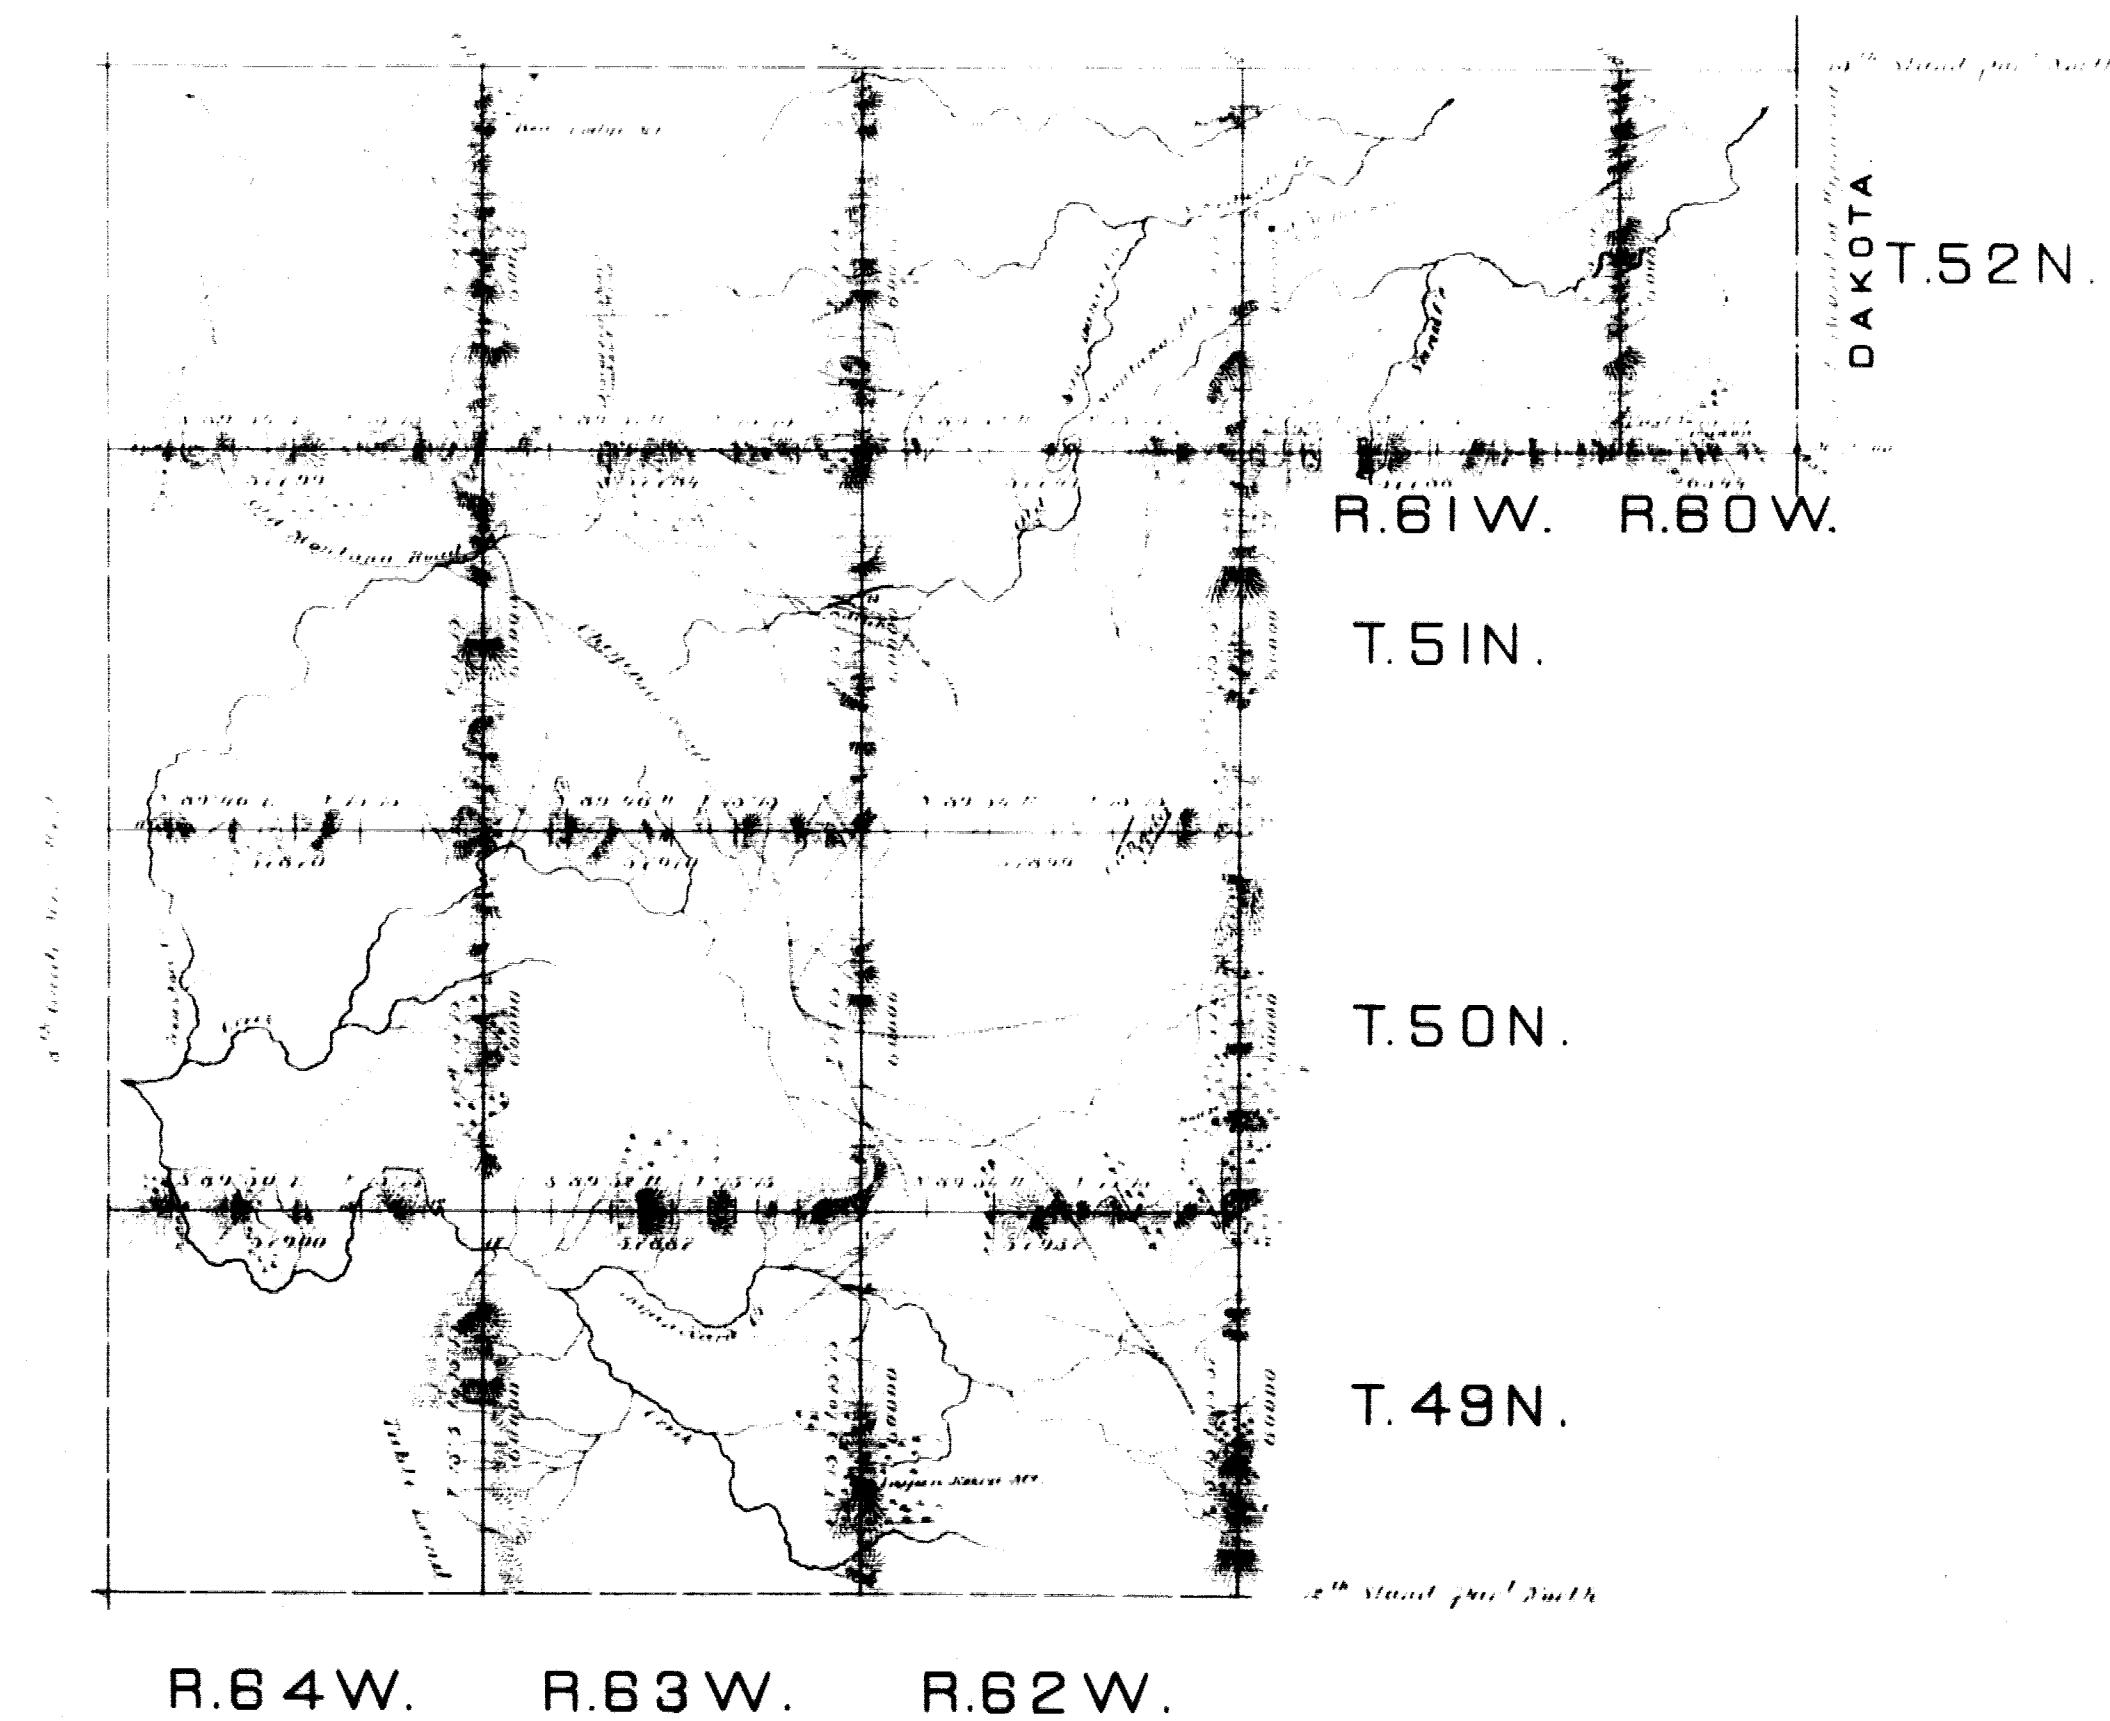

Survey Designated by Number Surveyed Date of Contract		Amount of Survey When Surveyed		
Exterior Lines	Colins Stake	Sept. 26, 1881	140	53 36 Oct 20 North 1881
Connections			30	38

I hereby certify that the above diagram of the Exterior lines of Townships 49,50,51,52 North, Ranges 62, 63 & 64 W., and Townships 52 North, Ranges 60, 61, 62, 63 & 64 West of the Sixth Principal Meridian, Wyoming Territory, is strictly conformable to the field notes of the survey thereof on file in this Office, which have been examined and approved.
Surveyor General's Office
Cheyenne, Wyo, October 4th, 1881

Edw. C. Davis
Surveyor General