

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SEVENTH STANDARD PARALLEL NORTH THROUGH RANGE 108 WEST,

THE THIRTEENTH AUXILIARY GUIDE MERIDIAN WEST,

THROUGH TOWNSHIP 29 NORTH, BETWEEN RANGES 108 AND 109 WEST,

THE EAST AND NORTH BOUNDARIES,

AND SUBDIVISIONAL LINES,

TOWNSHIP 29 NORTH, RANGE 108 WEST,

OF THE SIXTH PRINCIPAL MERIDIAN,

IN THE STATE OF WYOMING.

EXECUTED BY

OLIAN T. SHOCKLEY

CADASTRAL SURVEYOR

Under Special Instructions dated March 26, 2001, approved March 26, 2001, which provided for the surveys included under Group Number 688, Wyoming, and assignment instructions dated MARCH 26, 2002

Survey commenced JUNE 4, 2002

Survey completed OCTOBER 11, 2002

INDEX DIAGRAM

Township 29 North, Range 108 West

	28	27	26	25	24	23	
15	6	82 5	69 4	59 3	49 2	38 1	21
	81	81	68	58	48	38	
14	7	80 8	67 9	57 10	47 11	36 12	20
	79	78	66	56	46	36	
13	18	77 17	65 16	55 15	45 14	34 13	19
	77	76	64	54	44	34	
12	19	75 20	63 21	53 22	43 23	33 24	18
	74	73	62	52	42	32	
11	30	72 29	61 28	51 27	41 26	31 25	17
	72	71	61	50	40	30	
10	31	70 32	59 33	49 34	29 35	29 36	15
	8	7	6	5	3	2	

T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

<p>CHAINS</p>	<p>The following field notes are those of the dependent resurvey of the Seventh Standard Parallel North through Range 108 West, the Thirteenth Auxiliary Guide Meridian West through Township 29 North, between Ranges 108 and 109 West, the east and north boundaries, and subdivisional lines, Township 29 North, Range 108 West, Sixth Principal Meridian, Wyoming.</p> <p>The history of surveys pertaining to this resurvey is as follows:</p> <p>Franklin O. Sawin surveyed the Seventh Standard Parallel North (south boundary) and the Thirteenth Auxiliary Guide Meridian West (west boundary) in 1889. James M. Gilmore and Charles T. Loback surveyed the east and north boundaries and the subdivisional lines in 1894. Wayne M. Gardner remonumented the cor. of Tps. 29 and 30 N., Rs. 108 and 109 W. during the dependent resurvey of T. 30 N., R. 109 W. in 1968.</p> <p>The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 688, Wyoming, dated March 26, 2001.</p> <p>Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data were thoroughly verified and only true line field notes are given herein, which refer to the completed survey.</p> <p>All local monuments set by private surveyors and accepted or rejected during the course of this resurvey are on file in the Sublette County Courthouse in Pinedale, Wyoming. Exceptions are noted in the field notes.</p> <p>The survey was executed with TRIMBLE Model 4700 Global Positioning System (GPS) receivers. The directions of all lines refer to the true meridian, as determined by GPS observations. GPS control network and supporting data are contained in the official group file.</p> <p>Detectable Electronically Energized Particles (DEEP-1 TM) were buried as memorials at each newly established corner monument. The DEEP-1 is composed of strontium encased in a white plastic case. The magnets are 1 inch in diameter, 2½ inches long, weigh 2½ ounces, and are magnetically detectable to an average depth of 8 feet.</p> <p>The geographic position of the standard corner of Township 29 North, Ranges 107 and 108 West, based on NAD 83 (1993) and determined by Global Positioning System methods is:</p>
----------------------	---

T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS

Latitude 42° 25' 53.888" N., Longitude 109° 39' 19.530" W.

The mean magnetic declination is 13° E.

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

(Restoring the survey executed by
Franklin O. Sawin in 1889)

Beginning at the standard cor. of Tp. 29 N., Rs. 107 and 108 W., monumented with a sandstone, 32x10x3 ins., firmly set 17 ins. in the ground, plainly mkd. with 2 grooves and SC T29 R107 on N. face, 6 grooves on E. face, and 6 grooves on W. face, with a scattered mound of stone, 3 ft. base, W. of the cor.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, in a collar of stone, with brass cap mkd.

	SC	
	T29N	
R108W		R107W
S 36		S 31
2002		

Bury the original stone alongside the iron post, and rehabilitate the mound of stone, W. of the cor.

Cor. is located on the N. side of a low hill.

N. 89° 58' W., along the S. bdy. of sec. 36.

Over gently rolling terrain.

39.89 The standard 1/4 sec. cor. of sec. 36, monumented with a sandstone, 18x10x2 ins., firmly set 10 ins. in the ground, plainly mkd. VII SC 1/4 on N. face, with a scattered mound of stone, 3 ft. base, E. of the cor.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS	SC T29N R108W 1/4 S 36 <hr style="width: 50%; margin: 0 auto;"/> 2002
	<p>Bury the original stone alongside the iron post, raise a mound of stone, 3 ft. base, 1 ft. high, NE. of the cor., and set a steel fence post nearby.</p> <hr style="width: 50%; margin: 10px auto;"/> <p>N. 89° 55' W., beginning new measurement.</p>
3.62	<p>The closing cor. of secs. 2 and 3, T. 28 N., R. 108 W., monumented with a broken sandstone, 10x1 ins., firmly set, projecting 9 ins. above the ground, plainly mkd. CC on S. face, with a steel fence post nearby, bears NORTH, 3 lks. dist.</p>
39.41	<p>Center of a 3/4 in. stainless steel nut atop the center valve of and underground natural gas array, bears SOUTH, 3.75 chs. dist.</p>
39.97	<p>The standard cor. of secs. 35 and 36, monumented with a sandstone, 24x10x1 ins., firmly set 15 ins. in the ground, plainly mkd. 1 notch on E. edge, and 5 notches on W. edge, in a scattered collar of stone, with a mound of stone, 3 ft. base, E. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> SC T29N R108W S 35 S 36 <hr style="width: 50%; margin: 0 auto;"/> 2002 </div> <p>Bury the original stone alongside the iron post and rehabilitate the collar of stone.</p> <p>Cor. is located in a fenced plastic mesh enclosure, 15 x 10 ft., and 40 lks. N. of trail road, bears ENE. and WNW. in curve.</p> <hr style="width: 50%; margin: 10px auto;"/> <p>N. 88° 55' W., along the S. bdy. of sec. 35.</p> <p>Over level terrain.</p>

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS						
0.50	<p>Clearing for underground natural gas pipeline, 75 lks. wide, bears SSE. and NNW.</p>					
40.01	<p>The standard 1/4 sec. cor. of sec. 35, monumented with a sandstone, 18x10x2 ins., firmly set 8 ins. in the ground, plainly mkd. VII SC 1/4 on N. face, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor. and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr><td>SC</td></tr> <tr><td>T29N R108W</td></tr> <tr><td>1/4 S 35</td></tr> <tr><td>-----</td></tr> <tr><td>2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post.</p> <hr style="width: 30%; margin-left: auto; margin-right: auto;"/> <p>N. 89° 54' W., beginning new measurement.</p>	SC	T29N R108W	1/4 S 35	-----	2002
SC						
T29N R108W						
1/4 S 35						

2002						
38.61	<p>Graded road, 32 lks. wide, bears NE. and SW.</p>					
39.95	<p>The standard cor. of secs. 34 and 35, monumented with a sandstone, 14x20x1 ins., firmly set 10 ins. in the ground, dimly mkd. SC R08 on N. face, two notches on E. edge, and 4 dimly mkd. notches on W. edge, with a scattered mound of stone, E. of the cor. and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr><td>SC</td></tr> <tr><td>T29N R108W</td></tr> <tr><td>S 34 S 35</td></tr> <tr><td>-----</td></tr> <tr><td>2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor.</p> <hr style="width: 60%; margin-left: auto; margin-right: auto;"/>	SC	T29N R108W	S 34 S 35	-----	2002
SC						
T29N R108W						
S 34 S 35						

2002						

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS	
	N. 89° 56' W., along the S. bdy. of sec. 34. Over level terrain.
6.26	Steel reinforcement rod, 5/8 ins. diam., firmly set, projecting 6 ins. above the ground, with aluminum cap mkd. UINTAH ENG CP . LS 489, bears SOUTH, 39.3 lks. dist.
14.45	Graded road, 32 lks. wide, bears ESE. and WNW. in curve.
15.32	Graded road, 32 lks. wide, bears ENE. and SW. in curve.
15.65	Graded road, 32 lks. wide, bears SE. and NW.
40.03	Point for the standard 1/4 sec. cor. of sec. 34, at proportionate distance, there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd. <div style="text-align: center; margin: 10px 0;"> SC T29N R108W 1/4 S 34 <hr style="width: 10%; margin: 0 auto;"/> 2002 </div>
	Raise a mound of stone, 2 ft. base, 1 ft. high, N. of the cor., and set a steel fence post nearby.
	Cor. is located 8.5 lks. E. of a scattered mound of stone, approximately 6 ft. diam., 1½ ft. high, on open, level ground.
43.35	Graded road, 20 lks. wide, bears N. and S.
43.74	Tapered stone and cement cairn, 4 ft. square at the base, 5 ft. high, bears SOUTH, 2 lks. dist.
43.94	Barbed wire fence, 4 strand, bears N. and S.
54.48	Luman Road, asphalt surface, 32 lks. wide, bears NNE. and SSW.

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS					
80.06	<p>The standard cor. of secs. 33 and 34, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 5/8 ins. diam., 32 ins. long, firmly set 27 ins. in the ground, in a collar of stone, 2 ft. base, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S33 S34 T28N 2001, with a steel fence post and tire filled with stones nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and an inverted brown glass bottle, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">SC</td></tr> <tr><td style="padding: 0 10px;">T29N R108W</td></tr> <tr><td style="padding: 0 10px;">S 33 S 34</td></tr> <tr><td style="border-top: 1px solid black; padding: 0 10px;">2002</td></tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 89° 46' W., along the S. bdy. of sec. 33.</p> <p>Over gently sloping terrain.</p>	SC	T29N R108W	S 33 S 34	2002
SC					
T29N R108W					
S 33 S 34					
2002					
1.06	<p>Graded road, 32 lks. wide, bears SSE. and NNW.</p>				
40.04	<p>The standard 1/4 sec. cor. of sec. 33, monumented with a sandstone, 23x9x3ins., firmly set 10 ins. in the ground, plainly mkd. VII SC 1/4 on S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">SC</td></tr> <tr><td style="padding: 0 10px;">T29N R108W</td></tr> <tr><td style="padding: 0 10px;">1/4 S 33</td></tr> <tr><td style="border-top: 1px solid black; padding: 0 10px;">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p>	SC	T29N R108W	1/4 S 33	2002
SC					
T29N R108W					
1/4 S 33					
2002					

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS									
	<p>Cor. is located 65 lks. W. of graded road, 32 lks. wide, bears NNE. and SSW.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 56' W., beginning new measurement.</p>								
32.72	Graded road, 25 lks. wide, bears N. and S.								
39.91	<p>The standard cor. of secs. 32 and 33, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with a tire filled with stones nearby, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px; border-right: 1px solid black;">S 32</td> <td style="padding: 0 5px;">S 33</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; padding-top: 5px;">SC</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 5px;">1995</td> </tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>Cor. is located on the S. side of a fence cor. post, 4 strand barbed wire fences extending N. and W.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 51' W., along the S. bdy. of sec. 32.</p> <p>Over level terrain, along a fence.</p>	T29N	R108W	S 32	S 33	SC		1995	
T29N	R108W								
S 32	S 33								
SC									
1995									
18.28	Steel reinforcement rod, 5/8 ins. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. JFC.SNOW, bears SOUTH, 2.19 chs. dist.								
40.05	<p>The standard 1/4 sec. cor. of sec. 32, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, in a tire filled with stones, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">1/4 S</td> <td style="padding: 0 5px;">32</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; padding-top: 5px;">SC</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 5px;">1995</td> </tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p>	T29N	R108W	1/4 S	32	SC		1995	
T29N	R108W								
1/4 S	32								
SC									
1995									

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS											
1.60	<p>Cor. is located in a 4 strand barbed wire fence, bears E. and W.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>S. 89° 55' W., beginning new measurement.</p> <p>Over level terrain, along fence.</p> <p>The closing cor. of T. 28 N., Rs. 108 and 109 W., determined by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, in fence extending E. and W., with brass cap inscribed PAUL N. SHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">C</td> <td style="padding: 0 5px;">C</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 1</td> <td style="padding: 0 5px;">S 6</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R109W</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">T28N</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">1995</td> </tr> </table> </div> <p>The cor. is located 2 lk. N. of a 4 strand barbed wire fence, bears E. and W.</p>	C	C	S 1	S 6	R109W	R108W	T28N		1995	
C	C										
S 1	S 6										
R109W	R108W										
T28N											
1995											
39.94	<p>The standard cor. of secs. 31 and 32, reestablished by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with a tire filled with stones nearby, with brass cap inscribed PAUL N. SHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 31</td> <td style="padding: 0 5px;">S 32</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">SC</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">1995</td> </tr> </table> </div> <p>This position is accepted as a careful and faithful reestablishment of the original cor.</p> <p>Cor. is located 2 lks. N. from cor. of fences extending N. and E.</p> <hr style="width: 20%; margin: 0 auto;"/>	T29N	R108W	S 31	S 32	SC		1995			
T29N	R108W										
S 31	S 32										
SC											
1995											
1.85	<p>S. 89° 54' W., along the S. bdy. of sec. 31.</p> <p>Over level terrain.</p> <p>Graded road, 32 lks. wide, bears SE. and NW.</p>										

Dependent Resurvey, Seventh Standard Parallel North,
Through Range 108 West, Sixth Principal Meridian, Wyoming

CHAINS													
28.74	Steel pipe guard post (westernmost cor.) protecting an underground pipeline valve array, bears NORTH, 40 lks. dist.												
28.80	Graded road, 32 lks. wide, bears SE. and NW.												
39.95	<p>The standard 1/4 sec. cor. of sec. 31, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with a tire filled with stones nearby, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr> <td>T29N</td> <td>R108W</td> </tr> <tr> <td>1/4</td> <td>S 31</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td colspan="2" style="text-align: center;">SC</td> </tr> <tr> <td colspan="2" style="text-align: center;">1995</td> </tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 57' W., beginning new measurement.</p> <p>Over level terrain.</p>	T29N	R108W	1/4	S 31			SC		1995			
T29N	R108W												
1/4	S 31												
SC													
1995													
1.60	From this point, the original closing cor. of secs. 1 and 2, T. 28 N., R. 109 W., perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with a quartzite stone, 12x10 ins., firmly set, projecting 8 ins. above the ground, mkd. SS on N. face, 1 groove on E. face, CC on S. face, and 5 grooves on W. face, bears NORTH, 4 lks. dist.												
39.99	<p>The standard cor. of Tp. 29 N., Rs. 108 and 109 W., perpetuated by Paul N. Scherbel, Wyoming Registered Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap inscribed PAUL N. SCHERBEL RLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr> <td colspan="2" style="text-align: center;">T29N</td> </tr> <tr> <td style="border-right: 1px solid black;">R109W</td> <td>R108W</td> </tr> <tr> <td style="border-right: 1px solid black;">S 36</td> <td>S 31</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td colspan="2" style="text-align: center;">T28N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1976</td> </tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <hr style="width: 20%; margin: 10px auto;"/>	T29N		R109W	R108W	S 36	S 31			T28N		1976	
T29N													
R109W	R108W												
S 36	S 31												
T28N													
1976													

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming,

CHAINS	
	<p style="text-align: center;">(Restoring the survey executed by Franklin O. Sawin in 1889)</p> <hr/> <p>From the cor. of Tp. 29 N., Rs. 108 and 109, as previously described.</p> <p>N. 0° 16' E., bet. secs. 31 and 36.</p> <p>Over level terrain, along fence.</p> <p>39.99 The 1/4 sec. cor. of secs. 31 and 36, perpetuated by Paul N. Scherbel, Wyoming Registered Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, E. of fence extending N. and S., with a brass cap inscribed PAUL N. SCHERBEL RLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W 1/4 S 36 S 31 1976</p> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>The cor. is located 1 lk. E. of a 4 strand barbed wire fence, bears N. and S.</p> <hr/> <p>N. 0° 15' E., beginning new measurement.</p> <p>Over level terrain, along fence.</p> <p>39.95 The cor. of secs. 25, 30, 31 and 36, perpetuated by Paul N. Scherbel, Wyoming Registered Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with a tire filled with stones nearby, with brass cap inscribed PAUL N. SCHERBEL RLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W S 25 S 30 ----- S 36 S 31 1976</p> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p>

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming.

CHAINS	
	<p>Cor. is located 1 lk. E. of fence cor., 4 strand barbed wire fences extending N., S. and W.</p> <hr/>
	<p>N. 0° 13' E., bet. secs. 25 and 30.</p>
	<p>Over level terrain, along fence.</p>
17.16	<p>Graded road, 32 lks. wide, bears SSE. and NNW.</p>
36.37	<p>The original 1/4 sec. cor. of secs 25 and 30, a sandstone, 16x9x2 ins., dimly mkd. 1/4 on a face, laying loose atop the ground, in a trail road, bears EAST, 15 lks. dist. Removed the stone from the vicinity.</p>
39.96	<p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate distance, there is no remaining evidence of the original cor. position.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker, in fence bears N. and S., in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T29N R109W R108W 1/4 S 25 S 30 2002</p>
	<p>Cor. is located on E. edge of trail road, bears N. and S.</p>
79.92	<p>The cor. of secs. 19, 24, 25, and 30, monumented with a sandstone, 20x10x4 ins., firmly set 14 ins. in the ground, in fence extending N. and S., plainly mkd. 4 notches on N. edge, and 2 grooves on S. face, with a small scattered mound of stone N. of the cor.</p>
	<p>At the corner point</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T29N R109W R108W S 24 S 19 ----- S 25 S 30 2002</p>

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming,

CHAINS	
39.97	<p>Bury the original stone alongside the iron post, and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.</p> <hr/> <p>N. 0° 15' E., bet. secs. 19 and 24.</p> <p>Over level terrain, along fence.</p> <p>The 1/4 sec. cor. of secs. 19 and 24, monumented with a sandstone, 18x10x3 ins., firmly set 12 ins. in the ground, in fence extending N. and S., plainly mkd. 1/4 on E. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W 1/4 S 24 S 19 2002</p> </div> <p>Bury the original stone alongside the iron post, and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.</p> <hr/> <p>N. 0° 20' E., beginning new measurement.</p> <p>Over level terrain, along fence.</p>
40.00	<p>The cor. of secs. 13, 18, 19, and 24, monumented with a sandstone, 18x15x3 ins., firmly set 10 ins. in the ground, in fence extending N. and S., plainly mkd. 3 notches on N. edge and 3 grooves on S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W S 13 S 18 ----- S 24 S 19 2002</p> </div>

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming,

CHAINS	
	<p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on E. edge of trail road, bears N. and S.</p> <hr/> <p>N. 0° 21' E., bet. secs. 13 and 18.</p> <p>Over level terrain, along fence.</p>
39.965	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T29N T109W R108W 1/4 S 13 S 18 2002</p> <p>Cor. is located on W. edge of trail road, bears N. and S.</p>
44.05	<p>Aluminum rod, 3/4 ins. diam., firmly set, projecting 10 ins. above the ground, with aluminum cap mkd. U.S. DEPT. OF THE INTERIOR BLM PROJECT NO 4725 DESERT WELL SW NW SEC18 T29N R108W 1984 NOT A SURVEY CORNER, bears EAST, 2.91 chs. dist. The monument is located 3 lks. WSW. of the center shaft of Lot 2 windmill.</p>
45.25	<p>Clearing for underground pipe line, 1 ch. wide, bears E. and W.</p>
79.93	<p>The cor. of secs. 7, 12, 13, and 18, monumented with a sandstone, 20x11x3 ins., firmly set 12 ins. in the ground, plainly mkd. 2 grooves on N. face and 4 grooves on S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground to bedrock, atop a "DEEP_1" magnetic marker, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R109W R108W S 12 S 7 ----- S 13 S 18 2002</p>

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming,

CHAINS	
	<p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on W. edge of trail road, bears N. and S., and 2 lks. E. of fence, 3 strand barbed wire, bears N. and S.</p> <hr/> <p>N. 0° 16' E., bet. secs. 7 and 12.</p> <p>Over level terrain, along fence.</p> <p>39.985 Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, to bedrock, atop a "DEEP-1" magnetic marker, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W 1/4 S 12 S 7 2002</p> </div> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on W. edge of trail road, bears N. and S., and 2 lks. E. of fence, 3 strand barbed wire, bears N. and S.</p>
79.97	<p>The cor. of secs. 1, 6, 7, and 12, perpetuated by Paul N. Scherbel, Wyoming Registered Land Surveyor No. 164 in 1977, monumented with a limestone, 29x8x1 ins., firmly set 16 ins. in the ground, plainly mkd. 1 groove on N. face, 5 grooves on S. face, and SS on W. face. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W S 1 S 6 ----- S 12 S 7 2002</p> </div> <p>Bury the stone set by Scherbel alongside the iron post.</p>

Dependent Resurvey, Thirteenth Auxiliary Guide Meridian West,
Through Township 29 North, Between Ranges 108 and 109 W.,
Sixth Principal Meridian, Wyoming,

CHAINS	
	<p>The cor. is located on a moderate north slope, 2 lk. E. of a 3 strand barbed wire fence, bears N. and S.</p> <hr/> <p>N. 0° 06' W., bet. secs. 1 and 6.</p> <p>Descend moderate slope, along fence.</p> <p>40.00 Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R109W R108W 1/4 S 1 S 6 2002</p> </div> <p>Raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor. and set a steel fence post nearby.</p> <p>Cor. is located 7 lks. W. of fence, bears N. and S.</p>
80.00	<p>The cor. of Tps. 29 and 30 N., Rs. 108 and 109 W., monumented with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, in a collar of stone, with brass cap mkd. as described in the 1968 field notes of the dependent resurvey, T. 30 N., R. 109 W.</p> <p>Cor. is located 1.5 lks. W. of cor. of fences extending E., S. and NW.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of the East Boundary, T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by James M. Gilmore and Charles T. Loback in 1894)</p> <hr/> <p>From the standard cor. of Tp. 29 N., Rs. 107 and 108 W.</p> <p>N. 0° 14' W., bet. secs. 31 and 36.</p> <p>Over gently rolling terrain.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.00	<p>The 1/4 sec. cor. of secs. 31 and 36, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 5/8 ins. diam., 30 ins. long, firmly set 22 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W R107W S36 S31 1997, with a sandstone, 17x10x2 ins., plainly mkd. 1/4 on a face, laying loose on top of the ground alongside, and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W R107W 1/4 S 36 S 31 2002</p> </div> <p>Bury the reinforcement rod and original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 28' W., beginning new measurement.</p> <p>Over level terrain.</p>
28.79	<p>Graded road, 32 lks. wide, bears SSE. and NNW.</p>
40.00	<p>The cor. of secs. 25, 30, 31 and 36, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 26 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W R107W S25 S30 S36 S31 1997, with a mound of stone, 2 ft. base, 1 ft. high, N. of the cor., and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
	<table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">T29N</td></tr> <tr><td style="text-align: center;">R108W</td><td style="text-align: center;">R107W</td></tr> <tr><td style="text-align: center;">S 25</td><td style="text-align: center;">S 30</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S 36</td><td style="text-align: center;">S 31</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table>	T29N		R108W	R107W	S 25	S 30	-----		S 36	S 31	2002	
T29N													
R108W	R107W												
S 25	S 30												

S 36	S 31												
2002													
	Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.												
	<hr/>												
	N. 0° 17' W., bet. secs. 25 and 30.												
	Over gently rolling terrain.												
10.95	Graded road, 23 lks. wide, bears E. and W.												
21.72	Fence, 4 strand barbed wire, bears E. and W.												
39.48	The 1/4 sec. cor. of secs. 25 and 30, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 26 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W R107W S25 S30 1996, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor., and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.												
	At the corner point												
	Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.												
	<table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">T29N</td></tr> <tr><td style="text-align: center;">T108W</td><td style="text-align: center;">R107W</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td style="text-align: center;">S 25</td><td style="text-align: center;">S 30</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table>	T29N		T108W	R107W	1/4		S 25	S 30	2002			
T29N													
T108W	R107W												
1/4													
S 25	S 30												
2002													
	Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft high, W. of the cor.												
	Cor. is located on W. side toe of a low hill.												
	<hr/>												
	N. 0° 22' W., beginning new measurement.												
	Over gently rolling terrain.												

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
3.66	Graded road, 32 lks. wide, bears NE. and SW.												
23.87	Graded road, 32 lks. wide, bears SSE. and NNW.												
39.97	<p>The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 18x10x3 ins., firmly set 6 ins. in the ground, plainly mkd. 4 grooves on N. face, and 2 grooves on S. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr><td colspan="2">T29N</td></tr> <tr><td>R108W</td><td>R107W</td></tr> <tr><td>S 24</td><td>S 19</td></tr> <tr><td colspan="2">— —</td></tr> <tr><td>S 25</td><td>S 30</td></tr> <tr><td colspan="2">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <p>The cor. is located on open, level ground, 65 lks. W. of the center of a dry wash, 10, lks. wide, 2 ft. deep, drains SSW.</p> <hr/> <p>N. 0° 04' W., bet. secs. 19 and 24.</p> <p>Ascend moderate S. slope.</p>	T29N		R108W	R107W	S 24	S 19	— —		S 25	S 30	2002	
T29N													
R108W	R107W												
S 24	S 19												
— —													
S 25	S 30												
2002													
23.80	Luman Road, asphalt surface, 32 lks. wide, bears ENE. and WSW.												
40.02	<p>The 1/4 sec. cor. of secs. 19 and 24, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, in a mound of stone, 3 ft. base, to top, with a steel fence post nearby, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr><td colspan="2">T29N</td></tr> <tr><td>R108W</td><td>R107W</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td>S 24</td><td>S 19</td></tr> <tr><td colspan="2">1997</td></tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p>	T29N		R108W	R107W	1/4		S 24	S 19	1997			
T29N													
R108W	R107W												
1/4													
S 24	S 19												
1997													

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
40.00	<p>Cor. is located 20 lks. S. of N. edge of a low bluff, bears NE. and SW.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 18' W., beginning new measurement.</p> <p>Descend moderate N. slope.</p> <p>The cor. of secs. 13, 18, 19, and 24, monumented with a sandstone, 12x8x5 ins., firmly set 8 ins. in the ground, plainly mkd. 3 grooves on N. face, and 3 notches on S. edge, with a mound of stone, 2 ft. base, 1 ft. high, W. of the cor., and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T29N</td></tr> <tr><td>R108W</td><td>R107W</td></tr> <tr><td>S 13</td><td> S 18</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 24</td><td> S 19</td></tr> <tr><td colspan="2">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, and rehabilitate the mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 02' W., bet. secs. 13 and 18.</p>	T29N		R108W	R107W	S 13	S 18			S 24	S 19	2002	
T29N													
R108W	R107W												
S 13	S 18												
S 24	S 19												
2002													
39.96	<p>The 1/4 sec. cor. of secs. 13 and 18, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 22 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W R107W 1/4 13 18 1997, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T29N</td></tr> <tr><td>R108W</td><td>R107W</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td>S 13</td><td> S 18</td></tr> <tr><td colspan="2">2002</td></tr> </table> </div>	T29N		R108W	R107W	1/4		S 13	S 18	2002			
T29N													
R108W	R107W												
1/4													
S 13	S 18												
2002													

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS																									
	<p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>N. 0° 32' W., beginning new measurement.</p> <p>Over level terrain.</p> <p>40.01 The cor. of secs. 7, 12, 13, and 18, monumented with a sandstone, 18x9x4 ins., firmly set 10 ins. in the ground, plainly mkd. 4 notches on S. edge, and 2 grooves on N. face, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="4" style="text-align: center;">T29N</td></tr> <tr><td style="text-align: center;">R108W</td><td style="text-align: center;">R107W</td><td colspan="2"></td></tr> <tr><td style="text-align: center;">S 12</td><td style="text-align: center;">S 7</td><td colspan="2"></td></tr> <tr><td colspan="2" style="text-align: center;">-----</td><td colspan="2"></td></tr> <tr><td style="text-align: center;">S 13</td><td style="text-align: center;">S 18</td><td colspan="2"></td></tr> <tr><td colspan="4" style="text-align: center;">2002</td></tr> </table> <p>Bury the original stone alongside the iron post, rehabilitate the mound of stone, 3 ft. base, 1 ft. high, W. of the cor., and set a steel fence post nearby.</p> <p>Cor. is located in shallow draw, approximately 1 ch. wide, 6 ft. deep, bears NNE. and SSW.</p> <hr/>	T29N				R108W	R107W			S 12	S 7			-----				S 13	S 18			2002			
T29N																									
R108W	R107W																								
S 12	S 7																								

S 13	S 18																								
2002																									
39.97	<p>N. 0° 17' W., bet. secs. 7 and 12.</p> <p>Over open, level terrain.</p> <p>The 1/4 sec. cor. of secs. 7 and 12, monumented with a sandstone, 14x12x6 ins., firmly set 6 ins. in the ground, plainly mkd. 1/4 on W. face, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor. and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>																								

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS

T29N
1/4
R108W R107W
S 12 | S 7
2002

Bury the original stone alongside the iron post, rehabilitate the mound of stone, 3 ft. base, 1 ft. high, W. of the cor., and set a steel fence post nearby.

Cor. is located on the N. side of a low, rocky hill approximately 10 ft. below the top.

N. 0° 23' W., beginning new measurement.

Over gently rolling terrain.

39.96 The cor. of secs. 1, 6, 7 and 12, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 5/8 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W R107W S1 S6 S7 S12 1998, with a partially buried upright iron wheel and steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.

T29N
R108W R107W
S 1 | S 6
S 12 | S 7
2002

Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.

The cor. is located on open, level ground.

N. 0° 20' W., bet. secs. 1 and 6.

Over open, level terrain.

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS																													
39.98	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with a crumbling, eroded sandstone, 17x9x3 ins., firmly set 10 ins. in the ground, dimly mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="4">T29N</td></tr> <tr><td colspan="4">1/4</td></tr> <tr><td>R108W</td><td></td><td>R107W</td><td></td></tr> <tr><td>S</td><td>1</td><td> </td><td>S 6</td></tr> <tr><td colspan="4">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor. and set a steel fence post nearby.</p> <p>Cor. is located on the N. side of a low, rocky hill, approximately 10 ft. below the top.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 24' W., beginning new measurement.</p> <p>Over gently rolling terrain.</p>	T29N				1/4				R108W		R107W		S	1		S 6	2002											
T29N																													
1/4																													
R108W		R107W																											
S	1		S 6																										
2002																													
40.04	<p>The cor. of Tps. 29 and 30 N., Rs. 107 and 108 W., monumented with a crumbling, eroded sandstone, 21x9x8 ins., firmly set 10 ins. in the ground, plainly mkd. 6 grooves on N. face, 6 grooves and R107 on E. face, 6 grooves and T29 on S. face, and 6 grooves on W. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="4">T30N</td></tr> <tr><td>R108W</td><td></td><td>R107W</td><td></td></tr> <tr><td>S</td><td>36</td><td> </td><td>S 31</td></tr> <tr><td colspan="4"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>S</td><td>1</td><td> </td><td>S 6</td></tr> <tr><td colspan="4">T29N</td></tr> <tr><td colspan="4">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p>	T30N				R108W		R107W		S	36		S 31	<hr style="width: 50%; margin: 0 auto;"/>				S	1		S 6	T29N				2002			
T30N																													
R108W		R107W																											
S	36		S 31																										
<hr style="width: 50%; margin: 0 auto;"/>																													
S	1		S 6																										
T29N																													
2002																													

Dependent Resurvey of the East Boundary,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Cor. is located on the E. side of a low hill, approximately 4 ft. below the top.
	<p style="text-align: center;">Dependent Resurvey of the North Boundary, T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming</p>
	<p style="text-align: center;">(Restoring the survey executed by James M. Gilmore and Charles T. Loback in 1894)</p>
	<p>S. 89° 54' W., bet. secs. 1 and 36.</p> <p>Over gently rolling terrain.</p>
40.01	<p>The 1/4 sec. cor. of secs. 1 and 36, monumented with a crumbling, eroded sandstone, 15x12x4 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T30N R108W S 36 1/4 ——— S 1 T29N 2002</p> </div> <p>Bury the original stone alongside the iron post, raise a mound of stone, 2 ft. base, 1 ft. high, N. of the cor. and set a steel fence post nearby.</p> <p>The cor. is located on open, level ground.</p>
	<p>N. 89° 47' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.99	<p>A wooden fence cor., 7 ins. diam., 4 ft, high, scribed with a horizontally oriented 5 and a downward pointing arrow on the N. face, bears SOUTH, 76.8 lks. dist.; 4 strand barbed wire fences extend SSE., W., and NNW.</p>
40.02	<p>Point for the cor. of secs. 1, 2, 35 and 36, at proportionate distance, there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 2</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 1</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">T29N</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Cor. is located on E. edge of trail road, bears N. and S., and 31 lks. E. of fence, bears N. and S.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 89° 47' W., bet. secs. 2 and 35.</p> <p>Over open, level terrain.</p>	T30N	R108W	S 35	S 36	S 2	S 1		T29N		2002
T30N	R108W										
S 35	S 36										
S 2	S 1										
	T29N										
	2002										
16.70	Graded road, 32 lks. wide, bears NE. and SW.										
21.26	Steel reinforcement rod, 3/8 ins. diam., projecting 4 ins. above the ground, with aluminum tag mkd. PI#2076, in fence, bears E. and W. and at W. edge of clearing for an underground natural gas pipeline, bears NE. and SW., bears SOUTH, 56.2 lks. dist.										
21.74	Steel reinforcement rod, 3/8 ins. diam., firmly set, projecting 8 ins. above the ground, with aluminum tag mkd. PI#1076, is located 3 lks. S. of fence, bears E. and W., bears SOUTH, 57.2 lks. dist.										
40.02	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 35</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 2</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">T29N</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Set a steel fence post nearby.</p> <p>Cor. is located 37 lks. N. of fence, bears irregularly E. and W.</p>	T30N	R108W		S 35	1/4	S 2		T29N		2002
T30N	R108W										
	S 35										
1/4	S 2										
	T29N										
	2002										

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
80.04	<p>The cor. of secs. 2, 3, 34, and 35, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T30N R108W S34 S35 S2 S3 T29N 1997. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a “DEEP-1” magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T30N</td> <td>R108W</td> </tr> <tr> <td>S 34</td> <td>S 35</td> </tr> <tr> <td>S 3</td> <td>S 2</td> </tr> <tr> <td colspan="2">T29N</td> </tr> <tr> <td colspan="2">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post, and set a steel fence post nearby.</p> <p>Cor. is located in trail road, bears E. and W., and 5 lks. N. of fence, bears E. and W.</p> <hr/> <p>N. 89° 49' W., bet. secs. 3 and 34.</p> <p>Over open, level terrain, along fence.</p>	T30N	R108W	S 34	S 35	S 3	S 2	T29N		2002			
T30N	R108W												
S 34	S 35												
S 3	S 2												
T29N													
2002													
40.095	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a “DEEP-1” magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T30N</td> <td>R108W</td> </tr> <tr> <td>S 34</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 3</td> <td></td> </tr> <tr> <td colspan="2">T29N</td> </tr> <tr> <td colspan="2">2002</td> </tr> </table> </div> <p>The corner is located in a 4 strand barbed wire fence, bears E. and W.</p>	T30N	R108W	S 34		1/4	—	S 3		T29N		2002	
T30N	R108W												
S 34													
1/4	—												
S 3													
T29N													
2002													

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
80.19	<p>The cor. of secs. 3, 4, 33, and 34, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 23 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T30N R108W S33 S34 S3 S4 T29N 1997. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 33</td> <td style="padding: 0 5px;">S 34</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 4</td> <td style="padding: 0 5px;">S 3</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The corner is located in a 4 strand barbed wire fence, bears E. and W.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 89° 45' W., bet. secs. 4 and 33.</p> <p>Over gently rolling terrain, along fence.</p>	T30N	R108W	S 33	S 34	S 4	S 3	T29N		2002			
T30N	R108W												
S 33	S 34												
S 4	S 3												
T29N													
2002													
39.95	<p>Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a "DEEP-1" magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 33</td> <td></td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;">_____</td> </tr> <tr> <td style="padding: 0 5px;">S 4</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>The corner is located in a 4 strand barbed wire fence, bears E. and W.</p>	T30N	R108W	S 33		1/4	_____	S 4		T29N		2002	
T30N	R108W												
S 33													
1/4	_____												
S 4													
T29N													
2002													

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
79.90	<p>The cor. of secs. 4, 5, 32, and 33, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T30N R108W S32 S33 S4 S5 T29N 1997, with a sandstone, 18x10x3 ins., laying atop the ground, S. of the cor. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 32</td> <td style="padding: 0 5px;">S 33</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 5</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 4</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The corner is located in a 4 strand barbed wire fence, bears irregularly E. and W.</p> <hr style="width: 50%; margin-left: 0;"/> <p>N. 89° 45' W., bet. secs. 5 and 32.</p> <p>Over gently rolling terrain.</p>	T30N	R108W	S 32	S 33	S 5	S 4	T29N		2002			
T30N	R108W												
S 32	S 33												
S 5	S 4												
T29N													
2002													
40.045	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 32</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;"></td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 5</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Raise a mound of stone, 2 ft. base, 1 ft. high N. of the cor. and set a steel fence post nearby.</p> <p>Cor. is located at mouth of shallow draw, drains NNE., 3.5 chs. N. of fence, bears irregularly E. and W.</p>	T30N	R108W		S 32	1/4			S 5	T29N		2002	
T30N	R108W												
	S 32												
1/4													
	S 5												
T29N													
2002													

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS													
80.09	<p>The cor. of secs. 5, 6, 31, and 32, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T30 R108 31 32 5 6 T29N 1997, with a mound of stone, 1 ft. base, N. of the cor. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 31</td> <td style="padding: 0 5px;">S 32</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 6</td> <td style="padding: 0 5px;">S 5</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>Cor. is located 12 lks. E. of 4 strand barbed wire fence, bears irregularly SE. and NW.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 89° 51' W., bet. secs. 6 and 31.</p>	T30N	R108W	S 31	S 32	S 6	S 5	T29N		2002			
T30N	R108W												
S 31	S 32												
S 6	S 5												
T29N													
2002													
40.08	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an eroded sandstone, 16x11x7 ins., firmly set 8 ins. in the ground, dimly mkd. 4 on N. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T30N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">S 31</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;"></td> </tr> <tr> <td></td> <td style="padding: 0 5px;">S 6</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T29N</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p>	T30N	R108W		S 31	1/4			S 6	T29N		2002	
T30N	R108W												
	S 31												
1/4													
	S 6												
T29N													
2002													

Dependent Resurvey of the North Boundary
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
34.44	<p>Cor. is located 2.75 chs. S. of 4 strand barbed wire fence, bears irregularly E. and W.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 47' W., beginning new measurement.</p> <p>Over open, level terrain.</p> <p>The cor. of Tps. 29 and 30 N., Rs. 108 and 109 W.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of the Subdivisional Lines, T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by James M. Gilmore and Charles T. Loback in 1894)</p> <hr/> <p>From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp.</p> <p>N. 0° 15' W., bet. secs. 35 and 36.</p> <p>Over gently rolling terrain.</p>
39.93	<p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W 1/4 S 35 S 36 2002</p> </div> <p>Set a steel fence post nearby.</p> <p>The cor. is located on open, level ground.</p>
70.07	<p>Graded road, 23 lks. wide, bears ENE. and WSW.</p>
79.86	<p>The cor. of secs. 25, 26, 35, and 36, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 5/8 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 26 25 36 35 1994, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 26</td> <td style="padding: 0 5px;">S 25</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on a gentle NW. slope.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp.</p> <p>N. 89° 45' W., bet. secs. 25 and 36.</p> <p>Over gently rolling terrain.</p>	T29N	R108W	S 26	S 25	S 35	S 36	2002			
T29N	R108W										
S 26	S 25										
S 35	S 36										
2002											
15.46	Graded road, 32 lks. wide, bears NE. and SW.										
39.79	<p>The 1/4 sec. cor. of secs. 25 and 36, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S25 S36 1995, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 25</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;"></td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>S. 89° 42' W., beginning new measurement.</p> <p>Over open, level terrain.</p>	T29N	R108W		S 25	1/4			S 36	2002	
T29N	R108W										
	S 25										
1/4											
	S 36										
2002											

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
30.28	Graded road, 23 lks. wide, bears N. and S.
39.93	The cor. of secs. 25, 26, 35 and 36. <hr/>
	N. 0° 46' W., bet. secs. 25 and 26. Over gently rolling terrain.
20.40	Fence, 4 strand barbed wire, bears E. and W.
24.81	Graded road, 23 lks. wide, bears SSE. and NNW.
38.89	The 1/4 sec. cor. of secs. 25 and 26, monumented with a sandstone, 22x11x3 ins., laying loose atop the ground, plainly mkd. 1/4 on a face, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd. <div style="text-align: center;"> T29N R108W 1/4 S 26 S 25 2002 </div> Bury the original stone alongside the iron post, rehabilitate the mound of stone, 4 ft. base, 2 ft. high, W. of the cor. and set a steel fence post nearby. <hr/>
	N. 0° 22' E., beginning new measurement. Over open, level terrain.
9.35	Luman Road, asphalt surface, 32 lks. wide, bears ENE. and WSW.
13.61	Fence surrounding BP Amoco Operations Center yard, bears E. and W. Thence across the BP Amoco Operations Center yard.
22.98	Fence surrounding BP Amoco Operations Center yard, bears E. and W.
41.20	The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 14x6x3 ins., firmly set 8 ins. in the ground, plainly mkd. 1 groove on E. face, and 2 grooves on S. face, with a steel fence post nearby.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS																	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 23</td> <td style="padding: 0 5px;">S 24</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 26</td> <td style="padding: 0 5px;">S 25</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post, raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor. and set a steel fence post nearby.</p> <hr/> <p>From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp.</p> <p>N. 89° 19' W., bet. secs. 24 and 25.</p> <p>Over gently rolling terrain.</p> <p>7.43 Graded road, 32 lks. wide, SSE. and NNW.</p> <p>23.80 Luman Road, asphalt surface, 32 lks. wide, bears NE. and SW.</p> <p>39.81 The 1/4 sec. cor. of secs. 24 and 25, monumented with a sandstone, 11x6x3 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP_1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 24</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 25</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor.</p> <p>Cor. is located 85 lks. S. of a shallow drainage, 50 lks. wide, 3 ft. deep, drains SSW.</p> <hr/> <p>N. 89° 51' W., beginning new measurement.</p>	T29N	R108W	S 23	S 24	S 26	S 25	2002		T29N	R108W		S 24	1/4	S 25	2002	
T29N	R108W																
S 23	S 24																
S 26	S 25																
2002																	
T29N	R108W																
	S 24																
1/4	S 25																
2002																	

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over open, level terrain.
39.71	The cor. of secs. 23, 24, 25, and 26. <hr/>
	N. 0° 14' W., bet. secs. 23 and 24.
	Over open, level terrain.
26.61	Graded road, 32 lks. wide, bears E. and W.
37.63	Graded road, 32 lks. wide, bears E. and W.
39.96	The 1/4 sec. cor. of secs. 23 and 24, monumented with a sandstone, 13x4x3 ins., firmly set 10 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.
	T29N R108W 1/4 S 23 S 24 2002
	Bury the original stone alongside the iron post. <hr/>
	N. 0° 15' W., beginning new measurement.
	Over open, level terrain.
39.96	The cor. of secs. 13, 14, 23, and 24, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S14 S13 S24 S23 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
	<table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">T29N</td> <td style="padding: 2px 5px;">R108W</td> </tr> <tr> <td style="padding: 2px 5px; border-right: 1px solid black;">S 14</td> <td style="padding: 2px 5px;">S 13</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 2px 5px; border-right: 1px solid black;">S 23</td> <td style="border-top: 1px solid black; padding: 2px 5px;">S 24</td> </tr> <tr> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px; text-align: center;">2002</td> </tr> </table>	T29N	R108W	S 14	S 13	S 23	S 24		2002
T29N	R108W								
S 14	S 13								
S 23	S 24								
	2002								
	<p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the Tp.</p> <p>S. 89° 58' W., bet. secs. 13 and 24.</p> <p>Over gently rolling terrain.</p>								
39.97	<p>The 1/4 sec. cor. of secs. 13 and 24, monumented with a sandstone, 17x9x4 ins., firmly set 10 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, 3 ft. base, to top, with brass cap mkd.</p>								
	<table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">T29N</td> <td style="padding: 2px 5px;">R108W</td> </tr> <tr> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;">S 13</td> </tr> <tr> <td style="padding: 2px 5px; border-right: 1px solid black;">1/4</td> <td style="padding: 2px 5px; border-top: 1px solid black;">S 24</td> </tr> <tr> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px; text-align: center;">2002</td> </tr> </table>	T29N	R108W		S 13	1/4	S 24		2002
T29N	R108W								
	S 13								
1/4	S 24								
	2002								
	<p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on E. edge of a bluff and 45 lks. E. of trail road, both bear irregularly N. and S.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 89° 16' W., beginning new measurement.</p> <p>Over open, level terrain, across the top of a low bluff.</p>								
39.61	<p>The cor. of secs. 13, 14, 23, and 24.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 20' W., bet. secs. 13 and 14.</p> <p>Over gently rolling terrain.</p>								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
39.97	<p>The 1/4 sec. cor. of secs. 13 and 14, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S14 S13 1997, with a mound of stone, 3 ft. base, 1 ft. high, N. of the cor. and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td>T29N</td><td>R108W</td></tr> <tr><td>1/4</td><td></td></tr> <tr><td>S 14</td><td> S 13</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post, and rebuild the mound of stone, 3 ft. base, 2 ft. high W. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 11' W., beginning new measurement.</p> <p>Over open, level terrain.</p>	T29N	R108W	1/4		S 14	S 13	2002			
T29N	R108W										
1/4											
S 14	S 13										
2002											
39.96	<p>The cor. of secs. 11, 12, 13, and 14, monumented with a sandstone, 14x8x4 ins., firmly set 10 ins. in the ground, plainly mkd. 1 groove on E. face, and 4 grooves on S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td>T29N</td><td>R108W</td></tr> <tr><td>S 11</td><td> S 12</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td>S 14</td><td> S 13</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table> </div> <p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p> <p>Cor. is located 20 lks. N. of a shallow dry wash, 10 lks. wide, drains WSW.</p>	T29N	R108W	S 11	S 12	-----		S 14	S 13	2002	
T29N	R108W										
S 11	S 12										

S 14	S 13										
2002											

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From this cor., the cor. position of secs. 11, 12, 13, and 14, established by Uintah Engineering and Land Surveying (no record), monumented with a steel reinforcement rod, 5/8 ins. diam., firmly set, projecting 7 ins. above ground, with aluminum cap mkd. UINTAH ENG & LS WYO T29N R108W S11 S12 S13 S14 2001, with a steel fence post nearby, bears N. 88° 28' W., 41.0 lks. dist. This cor. position was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 7, 12, 13, and 18, on the E. bdy. of the Tp.</p> <p>N. 89° 41' W., bet. secs. 12 and 13.</p> <p>Over gently rolling terrain.</p>
39.68	<p>The 1/4 sec. cor. of secs. 12 and 13, monumented with a sandstone, 16x8x3 ins., firmly set 9 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W S 12 1/4 ——— S 13 2002</p> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 41' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.84	<p>The cor. of secs. 11, 12, 13, and 14.</p> <hr/> <p>N. 0° 18' W., bet. secs. 11 and 12.</p> <p>Over open, level terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
27.41	North Jonah Road, graded, 32 lks. wide, bears NE. and SW.
40.00	<p>The 1/4 sec. cor. of secs. 11 and 12, monumented with a sandstone, 11x9x4 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on W. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R108W 1/4 S 11 S 12 2002</p> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 20' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.96	<p>The cor. of secs. 1, 2, 11, and 12, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 2 1 11 12 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R108W S 2 S 1 ----- S 11 S 12 2002</p> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp.</p> <p>N. 89° 33' W., bet. secs. 1 and 12.</p> <p>Over gently rolling terrain.</p>
38.87	Fence, 4 strand barbed wire, bears NNE. and SSW.
40.59	<p>The 1/4 sec. cor. of secs. 1 and 12, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set, 20 ins. in the ground, with aluminum cap mkd. UINTA ENG & LS WYO 489 T29N R108W 1/4 S1 S12 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W</p> <p style="margin-left: 100px;">S 1</p> <p style="margin-left: 100px;">1/4 ———</p> <p style="margin-left: 100px;">S 12</p> <p style="margin-left: 100px;">2002</p> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 47' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
29.75	North Jonah Road, graded, 32 lks. wide, bears SSE. and NNW.
38.89	<p>The cor. of secs. 1, 2, 11, and 12.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 44' W., bet. secs. 1 and 2.</p> <p>Over open, level terrain.</p>
11.00	North Jonah Road, graded, 32 lks. wide, bears SE. and NW.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.00	<p>The 1/4 sec. cor. of secs. 1 and 2, monumented with a sandstone, 11x9x5 ins., firmly set, 6 ins. in the ground, plainly mkd. 1/4 on W. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 2 S 1 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located 7 lks. W. of the E. edge of a low bluff, approximately 25 ft. high, bears irregularly N. and S.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 49' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.64	<p>The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp.</p> <p>N. 0° 55' W., bet. secs. 34 and 35.</p> <p>Over gently rolling terrain.</p>
40.01	<p>The 1/4 sec. cor. of secs. 34 and 35, monumented with a white river rock, 7x6x3 ins., laying loose atop the ground, plainly mkd. 1/4 on a face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 34 S 35 2002</p> <p>Bury the original stone alongside the iron post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
39.99	<p>Cor. is located 1.02 chs. E. of graded road, 29 lks. wide, bears N. and S.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 18' W., beginning new measurement.</p> <p>Over open, gently rolling terrain.</p> <p>The cor. of secs. 26, 27, 34, and 35, monumented with a sandstone, 11x6x1 ins., loose and leaning upright against a steel reinforcement rod, plainly mkd. 2 grooves on E. face, and 1 notch on S. edge, with a small mound of stone E. of the cor., and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T29N</td> <td style="padding: 2px 5px;">R108W</td> </tr> <tr> <td style="padding: 2px 5px; border-right: 1px solid black;">S 27</td> <td style="padding: 2px 5px;">S 26</td> </tr> <tr> <td style="padding: 2px 5px; border-right: 1px solid black;">S 34</td> <td style="padding: 2px 5px;">S 35</td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone and reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>N. 88° 21' W., bet. secs. 26 and 35.</p> <p>Ascend gentle N. slope.</p>	T29N	R108W	S 27	S 26	S 34	S 35	2002			
T29N	R108W										
S 27	S 26										
S 34	S 35										
2002											
40.44	<p>The 1/4 sec. cor. of secs. 26 and 35, monumented with a sandstone, 18x6x2 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on N. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T29N</td> <td style="padding: 2px 5px;">R108W</td> </tr> <tr> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;">S 26</td> </tr> <tr> <td style="padding: 2px 5px;">1/4</td> <td style="padding: 2px 5px; border-top: 1px solid black;">_____</td> </tr> <tr> <td style="padding: 2px 5px;"></td> <td style="padding: 2px 5px;">S 35</td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">2002</td> </tr> </table> </div>	T29N	R108W		S 26	1/4	_____		S 35	2002	
T29N	R108W										
	S 26										
1/4	_____										
	S 35										
2002											

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 42' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
12.04	Graded road, 32 lks. wide, bears NNE. and SSE., in curve.
40.01	<p>The cor. of secs. 26, 27, 34, and 35.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>N. 0° 49' W., bet. secs. 26 and 27.</p> <p>Over open, level terrain.</p>
8.12	Luman Road, asphalt surface, 32 lks. wide, bears NE. and SW.
40.00	<p>The 1/4 sec. cor. of secs. 26 and 27, monumented with a sandstone, 18x7x3 ins., laying loose atop the ground, plainly mkd. 1/4 on a face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W 1/4 S 27 S 26 2002</p> </div> <p>Bury the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 09' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
2.62	Graded road, 24 lks. wide, bears NNE. and SSW.
36.23	Graded road, 25 lks. wide, bears ENE. and WSW.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
39.95	<p>The cor. of secs. 22, 23, 26, and 27, monumented with a sandstone, 21x9x3 ins., firmly set 10 ins. in the ground, plainly mkd. 2 grooves on E. face, and 2 grooves on S. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">S 23</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 27</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 26</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>N. 89° 17' W., bet. secs. 23 and 26.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 22	S 23	S 27	S 26	2002	
T29N	R108W								
S 22	S 23								
S 27	S 26								
2002									
40.54	<p>The 1/4 sec. cor. of secs. 23 and 26, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 26 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 1/4 23 26 1994, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 23</td> <td style="padding: 0 5px;">S 26</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 26</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 80%; margin: 10px auto;"/>	T29N	R108W	S 23	S 26	1/4	S 26	2002	
T29N	R108W								
S 23	S 26								
1/4	S 26								
2002									

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>N. 89° 33' W., beginning new measurement.</p> <p>Descend gentle E. slope.</p>
8.47	Graded road, 32 lks. wide, bears NE. and SW.
34.06	Graded road, 32 lks. wide, bears SE. and NW.
40.28	The cor. of secs. 22, 23, 26, and 27.
<hr/>	
	<p>N. 0° 16' W., bet. secs. 22 and 23.</p> <p>Over open, level terrain.</p>
2.10	Graded road, 32 lks. wide, bears E. and W.
39.94	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a sandstone, 12x9x3 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on W. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> <p>T29N R108W 1/4 S 22 S 23 2002</p> </div> <p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on W. edge of a trail road, bears N. and S.</p>
<hr/>	
	<p>N. 0° 17' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.94	<p>The cor. of secs. 14, 15, 22, and 23, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 30 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S15 S14 S23 S22 1996, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 15</td> <td style="padding: 0 5px;">S 14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">S 23</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. 89° 12' W., bet. secs. 14 and 23.</p> <p>Over open, gently rolling terrain.</p>	T29N	R108W	S 15	S 14	S 22	S 23	2002	
T29N	R108W								
S 15	S 14								
S 22	S 23								
2002									
39.70	North Jonah Road, graded, 32 lks. wide, bears NNE. and SSW.								
40.96	<p>The 1/4 sec. cor. of secs. 14 and 23, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S14 S23 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground to sandstone bedrock, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 14</td> <td style="padding: 0 5px;">S 23</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 23</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr/>	T29N	R108W	S 14	S 23	1/4	S 23	2002	
T29N	R108W								
S 14	S 23								
1/4	S 23								
2002									

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.89	<p>N. 89° 42' W., beginning new measurement.</p> <p>Over open, level terrain.</p> <p>The cor. of secs. 14, 15, 22, and 23.</p> <hr/>
39.80	<p>N. 0° 19' W., bet. secs. 14 and 15.</p> <p>Over open, level terrain.</p> <p>The 1/4 sec. cor. of secs. 14 and 15, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 23 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S15 S14 1997, with a steel fence post nearby.</p> <p>Note: Although no record was found describing this monument as a perpetuation of the original stone, an unmarked, broken sandstone, 10x6x2 ins., was found partially buried alongside the reinforcing rod. For this reason, this is accepted as a careful and faithful perpetuation of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T29N R108W 1/4 S 15 S 14 2002 </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>N. 0° 20' W., beginning new measurement.</p> <p>Over open, level terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
39.81	<p>The cor. of secs. 10, 11, 14, and 15, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 23 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S10 S11 S14 S15 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 10</td> <td style="padding: 0 5px;">S 11</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 15</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 14</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. 89° 35' W., bet. secs. 11 and 14.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 10	S 11	S 15	S 14	2002			
T29N	R108W										
S 10	S 11										
S 15	S 14										
2002											
14.53	North Jonah Road, graded, 32 lks. wide, bears N. and S.										
40.53	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented with a broken, and buried sandstone, 11x7x2 ins., one edge projecting 1 in. above the ground, dimly mkd. 1/4 on a face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 11</td> <td></td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="border-top: 1px solid black;"></td> </tr> <tr> <td></td> <td style="padding: 0 5px;">S 14</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post, and set a steel fence post nearby.</p>	T29N	R108W	S 11		1/4			S 14	2002	
T29N	R108W										
S 11											
1/4											
	S 14										
2002											

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 44' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.39	<p>The cor. of secs. 10, 11, 14, and 15.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 19' W., bet. secs. 10 and 11.</p> <p>Over open, level terrain.</p>
3.22	<p>Trail road, bears ENE. and WSW.</p>
39.97	<p>The 1/4 sec. cor. of secs. 10 and 11, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set, 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S10 S11 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W</p> <p>1/4</p> <p>S 10 S 11</p> <p>2002</p> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 49' E., beginning new measurement.</p> <p>Over open, level terrain.</p>
15.91	<p>Center of shallow dry wash, 5 lks. wide, 1 ft. deep, drains E. in curve.</p>
39.82	<p>Point for the cor. of secs. 2, 3, 10, and 11, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T29N</td><td>R108W</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 10</td><td>S 11</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table>	T29N	R108W	S 3	S 2			S 10	S 11	2002	
T29N	R108W										
S 3	S 2										
S 10	S 11										
2002											
	<p>Set a steel fence post nearby.</p> <p>Cor. is located 8 lks. S. of trail road, bears ESE. and WNW.</p> <p>From this point, a monument established by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, a steel reinforcement rod, 3/4 ins. diam., firmly set, projecting 10 ins. above the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S3 S2 S11 S10 1997, with a steel fence post nearby, bears N. 89° 48' E., 71.4 lks. dist. This position was established using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>N. 89° 47' W., bet. secs. 2 and 11.</p> <p>Over open, gently rolling terrain.</p>										
40.055	<p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T29N</td><td>R108W</td></tr> <tr><td>S 2</td><td></td></tr> <tr><td>1/4</td><td style="border-top: 1px solid black;"></td></tr> <tr><td></td><td>S 11</td></tr> <tr><td colspan="2" style="text-align: center;">2002</td></tr> </table>	T29N	R108W	S 2		1/4			S 11	2002	
T29N	R108W										
S 2											
1/4											
	S 11										
2002											
	<p>Set a steel fence post nearby.</p> <p>The cor. is located on open, level ground.</p>										
41.32	<p>Remains of a wooden post, 5 ins. diam., firmly set, projecting 4 ins. above the ground, with broken fragments of sandstone laying alongside, bears NORTH, 36.6 lks. dist.</p>										
60.14	<p>Left bank of Sand Draw, 4 ft. high, bears ESE. and WNW., thence across bed of wash, 36 lks. wide, drains ESE.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
61.39	Right bank of Sand Draw, 4 ft. high, bears ESE. and WNW., thence leave bed of wash.
80.11	The cor. of secs. 2, 3, 10, and 11. <hr/> N. 1° 18' W., bet. secs. 2 and 3. Over open, gently rolling terrain.
39.83	The 1/4 sec. cor. of secs. 2 and 3, monumented with a sandstone, 11x7x1 ins., firmly set 6 ins. in the ground, plainly mkd. 1/4 on W. face, with a steel fence post nearby. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd. <div style="text-align: center;"> T29N R108W 1/4 S 3 S 2 2002 </div> Bury the original stone alongside the iron post. The cor. is located on open, level ground. <hr/> N. 0° 11' W., beginning new measurement. Over open, level terrain. The cor. is located on open, level ground.
39.82	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp. <hr/> From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp. N. 0° 17' W., bet. secs. 33 and 34. Over open, level terrain.
39.95	The 1/4 sec. cor. of secs. 33 and 34, monumented with a sandstone, 23x10x3 ins., firmly set 13 ins. in the ground, plainly mkd. 1/4 on E. face, with a steel fence post nearby.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS															
39.97	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">T29N</td><td style="padding: 0 10px;">R108W</td></tr> <tr><td style="padding: 0 10px;">S 33</td><td style="padding: 0 10px;">S 34</td></tr> <tr><td style="padding: 0 10px;">2002</td><td></td></tr> </table> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 20' W., beginning new measurement.</p> <p>Over open, gently rolling terrain.</p> <p>The cor. of secs. 27, 28, 33, and 34, perpetuated by Scott A. Scherbel, Wyoming Professional Land Surveyor No. 3889, (Wyoming Certified Land Corner Recordation Certificate filed at the Sublette County Courthouse by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, August 15, 1994), monumented with an iron post, 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with a rubber tire filled with stones, W. of the cor., and a steel fence post nearby, with brass cap inscribed SCOTT A. SCHERBEL PLS 3889 BIG PINEY WYO and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">T29N</td><td style="padding: 0 10px;">R108W</td></tr> <tr><td style="padding: 0 10px;">S 28</td><td style="padding: 0 10px;">S 27</td></tr> <tr><td style="padding: 0 10px;">S 33</td><td style="padding: 0 10px;">S 34</td></tr> <tr><td style="padding: 0 10px;">1994</td><td></td></tr> </table> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>Raise a mound of stone, 4 ft. base, to top of iron post.</p> <p>Cor. is located on top of low bluff, bears irregularly NE. and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>N. 89° 39' W., bet. secs. 27 and 34.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 33	S 34	2002		T29N	R108W	S 28	S 27	S 33	S 34	1994	
T29N	R108W														
S 33	S 34														
2002															
T29N	R108W														
S 28	S 27														
S 33	S 34														
1994															

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
7.99	Luman Road, asphalt surface, 32 lks. wide, bears NE. and SW.
39.66	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with a sandstone, 17x8x2 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on N. face, with a scattered mound of stone E. of the cor. and steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R108W S 27 1/4 ——— S 34 2002</p> </div> <p>Bury the original stone alongside the iron post, and rebuild the mound of stone, 2 ft. base, 1 ft. high, N. of the cor.</p> <p>Cor. is located 1 ch. S. of graded road, 16 lks. wide, bears NE. and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 40' W., beginning new measurement.</p> <p>Ascend gentle E. slope.</p>
39.97	<p>The cor. of secs. 27, 28, 33, and 34.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 15' W., bet. secs. 27 and 28.</p> <p>Over open, level terrain.</p>
0.47	Trail road, bears NNE. and SSW.
3.34	Edge of bluff, bears irregularly NNE. and SSW., descend steep N. slope.
39.94	<p>The 1/4 sec. cor. secs. 27 and 28, perpetuated by Scott A. Scherbel, Wyoming Professional Land Surveyor No. 3889, monumented with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, with a mound of stone, 2 ft. base, 1 ft. high, W. of the cor. and a steel fence post nearby, with brass cap inscribed SCOTT A. SCHERBEL PLS 3889 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <p>T29N R108W 1/4 S 28 S 27 1994</p> </div>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
	<p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>Raise a mound of stone, 3 ft. base, to top of iron post.</p> <p>Cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 26' W., beginning new measurement.</p> <p>Over open, level ground.</p>								
2.61	Graded road, 18 lks. wide, bears NE. and SW.								
39.96	<p>The cor. of secs. 21, 22, 27, and 28, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with an aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 21 22 27 28 1994, with a mound of stone, 2 ft. base, 1 ft. high, W. of the cor., and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 21</td> <td style="padding: 0 5px;">S 22</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 28</td> <td style="padding: 0 5px;">S 27</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>N. 89° 56' W., bet. secs. 22 and 27.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 21	S 22	S 28	S 27	2002	
T29N	R108W								
S 21	S 22								
S 28	S 27								
2002									
39.42	<p>The 1/4 sec. cor. of secs. 22 and 27, monumented with a sandstone, 12x10x3 ins., firmly set 7 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p>								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> T29N R108W S 22 1/4 ——— S 27 2002 </div> <p>Bury the original stone alongside the iron post.</p> <p>Cor. is located 2.80 chs. N. of Sand Draw, 70 lks. wide, 4 ft. deep, drains WSW</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 53' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.00	<p>The cor. of secs. 21, 22, 27, and 28.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 13' W., bet. secs. 21 and 22.</p> <p>Over open, level terrain.</p>
40.01	<p>The 1/4 sec. cor. of secs. 21 and 22, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 26 ins. in the ground, with an aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S21 S2 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> T29N R108W 1/4 S 21 S 22 2002 </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
	N. 0° 05' W., beginning new measurement.								
	Over open, level ground.								
4.56	Graded road, 21 lks. wide, bears E. and W.								
40.18	<p>The cor. of secs. 15, 16, 21, and 22, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 16 15 22 21 1996, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 16</td> <td style="padding: 0 5px;">S 15</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 21</td> <td style="padding: 0 5px;">S 22</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. 89° 55' W., bet. secs. 15 and 22.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 16	S 15	S 21	S 22	2002	
T29N	R108W								
S 16	S 15								
S 21	S 22								
2002									
1.37	Trail road, bears NE. and SW.								
4.03	Sand Draw, 50 lks. wide, 5 ft. deep, drains WSW.								
39.31	<p>The 1/4 sec. cor. of secs. 15 and 22, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S15 S22 1996, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p>								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, to bedrock, atop a "DEEP-1" magnetic marker, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 15 1/4 _____ S 22 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>Cor. is located, 1.77 chs. N. of graded road, 20 lks. wide, bears NNE. and SSW.</p> <p style="text-align: center;">_____</p> <p>N. 89° 41' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.91	<p>The cor. of secs. 15, 16, 21, and 22.</p> <p style="text-align: center;">_____</p> <p>N. 0° 03' W., bet. secs. 15 and 16.</p> <p>Over open, level terrain.</p>
39.96	<p>The 1/4 sec. cor. secs. 15 and 16, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 16 15 1996, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 16 S 15 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <p style="text-align: center;">_____</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>N. 0° 29' W., beginning new measurement.</p> <p>Over open, level terrain.</p> <p>40.06 The cor. of secs. 9, 10, 15, and 16, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 9 10 15 16 1994, with a partially buried, upright iron wheel and steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <table data-bbox="841 814 1016 957" style="margin-left: auto; margin-right: auto;"> <tr> <td>T29N</td> <td>R108W</td> </tr> <tr> <td>S 9</td> <td>S 10</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S 16</td> <td>S 15</td> </tr> <tr> <td colspan="2" style="text-align: center;">2002</td> </tr> </table> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/>	T29N	R108W	S 9	S 10			S 16	S 15	2002	
T29N	R108W										
S 9	S 10										
S 16	S 15										
2002											
	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>S. 89° 56' W., bet. secs. 10 and 15.</p> <p>Over open, level terrain.</p> <p>39.85 The 1/4 sec. cor. of secs. 10 and 15, perpetuated by Brian L. Forbes, Wyoming Professional Land Surveyor No. 5653, monumented with a steel reinforcement rod, 5/8 ins. diam., 23 ins. long, firmly set, 20 ins. in the ground, with aluminum cap mkd. DR GRIFFIN & ASSOC T29N R108W 1/4 S10 S15 2001 5653 PLS5653, with a small mound of stone N. of the cor., and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T29N R108W S 10 1/4 ——— S 15 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: auto;"/> <p>N. 88° 56' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.26	<p>The cor. of secs. 9, 10, 15, and 16.</p> <hr style="width: 80%; margin: auto;"/> <p>N. 0° 27' W., bet. secs. 9 and 10.</p> <p>Over open, gently rolling terrain.</p>
40.04	<p>The 1/4 sec. cor. secs. 9 and 10, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 10 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S9 S10 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 9 S 10 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: auto;"/> <p>N. 0° 29' W., beginning new measurement.</p> <p>Over open, level terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
39.89	<p>The cor. of secs. 3, 4, 9, and 10, monumented with a sandstone, 12x11x4 ins., firmly set 8 ins. in the ground, plainly mkd. 5 grooves on S. face, and 3 vertical grooves on W. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td colspan="2">T29N R108W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S 4</td> <td style="padding: 2px 5px;">S 3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S 9</td> <td style="padding: 2px 5px;">S 10</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post and set a steel fence post nearby.</p> <p>From this cor., the cor. position of secs. 3, 4, 9, and 10, established by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, ¾ ins. diam., firmly set, projecting 9 ins. above ground, with an aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W S4 S3 S10 S9 1997, with a steel fence post nearby, bears N. 77° 19' E., 1.46 chs. dist. This cor. position was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr style="border: 0.5px solid black;"/> <p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>N. 89° 25' W., bet. secs. 3 and 10.</p> <p>Over open, level terrain.</p>	T29N R108W		S 4	S 3	S 9	S 10	2002			
T29N R108W											
S 4	S 3										
S 9	S 10										
2002											
40.045	<p>Point for the ¼ sec. cor. of secs. 3 and 10, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td colspan="2">T29N R108W</td> </tr> <tr> <td colspan="2" style="text-align: center;">S 3</td> </tr> <tr> <td style="padding: 2px 5px;">1/4</td> <td style="border-top: 1px solid black; padding: 2px 5px;">_____</td> </tr> <tr> <td colspan="2" style="text-align: center;">S 10</td> </tr> <tr> <td colspan="2" style="text-align: center;">2002</td> </tr> </table> </div> <p>Set a steel fence post nearby.</p>	T29N R108W		S 3		1/4	_____	S 10		2002	
T29N R108W											
S 3											
1/4	_____										
S 10											
2002											
80.09	<p>The cor. of secs. 3, 4, 9, and 10.</p> <hr style="border: 0.5px solid black;"/>										

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 0° 44' W., bet. secs. 3 and 4. Over open, level terrain.
2.27	Graded road, 32 lks. wide, bears E. and W.
39.90	The 1/4 sec. cor. secs. 3 and 4, monumented with an eroded and crumbling sandstone, 8x7x2 ins., firmly set 7 in. in the ground, no mks. visible. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd. <div style="text-align: center;"> T29N R108W 1/4 S 4 S 3 2002 </div>
	Bury the unmkd. stone alongside the iron post, and set a steel fence post nearby. The cor. is located on open, gently rolling ground. _____
	N. 0° 56' W., beginning new measurement. Over open, gently rolling terrain.
4.45	Shallow drain, drains ESE.
4.78	Shallow drain, drains ESE.
39.18	The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp. _____
	From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp. N. 0° 17' W., bet. secs. 32 and 33. Over open, level terrain, along fence.
40.03	The 1/4 sec. cor. of secs. 32 and 33, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 11 ins. above the ground, with a tire filled with stones W. of the cor., with brass cap inscribed PAUL N. SCHERBEL PLS BIG PINEY WYO and mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS									
	T29N R108W 1/4 S 32 S 33 1995								
	<p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>Cor. is located 50 lks. W. of fence, bears irregularly N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 11' W., beginning new measurement.</p> <p>Over open, level terrain.</p>								
40.04	<p>The cor. of secs. 28, 29, 32, and 33, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 29 28 33 32 1994, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and broken glass, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T29N</td> <td style="padding: 0 5px;">R108W</td> </tr> <tr> <td style="padding: 0 5px;">S 29</td> <td style="padding: 0 5px;">S 28</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 32</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 33</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>Cor. is located S. 34¼° W., 1.43 chs. dist., from cor. of fences extending S. and W.</p> <p>From this point, a monument established by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with a tire filled with stones nearby, with brass cap mkd. PAUL N. SCHERBEL PLS 164 BIG PINEY WYO T29N R108W S29 S28 S33 S32 1995, bears S. 74° 21' E., 2.1 lks. dist. This cor. position was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr style="width: 60%; margin: 10px auto;"/>	T29N	R108W	S 29	S 28	S 32	S 33		2002
T29N	R108W								
S 29	S 28								
S 32	S 33								
	2002								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	From the cor. of secs. 27, 28, 33, and 34.
	S. 89° 44' W., bet. secs. 28 and 33.
	Descend steep E. slope.
25.82	Graded road, 32 lks. wide, bears SSE. and NNW.
39.94	The 1/4 sec. cor. of secs. 28 and 33, perpetuated by Scott A. Scherbel, Wyoming Professional Land Surveyor No. 3889, (Wyoming Certified Land Corner Recordation Certificate filed at the Sublette County Courthouse by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, August 15, 1994), monumented with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone surrounded by a rubber tire, and with a steel fence post nearby, with brass cap inscribed SCOTT A. SCHEBEL PLS3889 BIG PINEY WYO and mkd.
	<div style="text-align: center;"> <p>T29N R108W S 28 1/4 _____ S 33 1994</p> </div>
	This position is accepted as a careful and faithful perpetuation of the original cor.
	The cor. is located on open, level ground.
	<hr style="width: 30%; margin-left: auto; margin-right: auto;"/>
	N. 89° 13' W., beginning new measurement.
	Over open, level terrain.
39.89	The cor. of secs. 28, 29, 32, and 33.
	<hr style="width: 60%; margin-left: auto; margin-right: auto;"/>
	N. 0° 08' W., bet. secs. 28 and 29.
	Over open, level terrain.
35.25	Sand Draw, 35 lks. wide, 4 ft. deep, drains SSW.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.02	<p>The 1/4 sec. cor. of secs. 28 and 29, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 25 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 1/4 29 28 1994, in a rubber tire, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R108W 1/4 S 29 S 28 2002</p> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 09' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.00	<p>The cor. of secs. 20, 21, 28, and 29, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 11 ins. above the ground, with a rubber tire filled with stones, W. of the cor., and a steel fence post nearby, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <div style="text-align: center;"> <p>T29N R108W S 20 S 21 ----- S 29 S 28 1994</p> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>The cor. is located on the west side of a low hill.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>N. 89° 26' W., bet. secs. 21 and 28.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over open, level terrain.
35.52	Graded road, 32 lks. wide, bears NNE. and SSW.
40.05	<p>The 1/4 sec. cor. of secs. 21 and 28, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 1/4 21 28 1994, with a scattered mound of stone W. of the cor., and a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R108W S 21 1/4 ——— S 28 2002</p> </div> <p>Bury the reinforcement rod alongside the iron post, and raise a mound of stone, 3 ft. base, 1 ft. high, N. of the cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 53' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
0.25	Dry wash, 40 lks. wide, 1 ft. deep, drains S.
32.16	Graded road, 32 lks. wide, bears SSE. and NNW.
39.48	<p>The cor. of secs. 20, 21, 28, and 29.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 22' W., bet. secs. 20 and 21.</p> <p>Over open, level terrain.</p>
10.41	Graded road, 32 lks. wide, bears NE. and SW.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.02	<p>The 1/4 sec. cor. of secs. 20 and 21, reestablished by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 12 ins. above the ground, with a tire filled with stones W. of the cor., and a steel fence post nearby, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 20 S 21 1995</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 22' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.02	<p>The cor. of secs. 16, 17, 20, and 21, monumented with a river rock, 9x6x5 ins., firmly set 4 ins. in the ground, plainly mkd. 3 grooves on S. face, and 4 grooves on E. face, with a steel reinforcement rod, ¾ ins. diam., 30 ins. long, set alongside the N. face, a rubber tire filled with stones W. of the cor., and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 17 S 16 ----- S 20 S 21 2002</p> <p>Bury the original stone and reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>N. 89° 47' W., bet. secs. 16 and 21.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over open, level terrain.
19.81	Graded road, 32 lks. wide, bears NNE. and SSW.
38.70	Trail road, bears N. and S.
39.80	The 1/4 sec. cor. of secs. 16 and 21, monumented with a sandstone, 15x12x4 ins., firmly set 11 ins. in the ground, plainly mkd. 1/4 on N. face, with a small mound of stone S. of the cor., and a steel fence post nearby.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.
	T29N R108W S 16 1/4 ——— S 21 2002
	Bury the original stone alongside the iron post.
	The cor. is located on open, level ground.

	N. 89° 46' W., beginning new measurement.
	Over open, level terrain.
39.60	Trail road, bears N. and S.
40.02	The cor. of secs. 16, 17, 20, and 21.

	N. 0° 21' W., bet. secs. 16 and 17.
	Over open, level terrain.
39.91	The 1/4 sec. cor. of secs. 16 and 17, monumented with a broken conglomerate stone, 8x4x2 ins., firmly set 5 ins. in the ground, in a rubber tire, with a matching conglomerate fragment, 5x3x3 ins., partially buried, dimly mkd. 4 on a face nearby, a small pile of broken sandstone, N. of the cor., and a steel fence post nearby.
	At the corner point

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 17 S 16 2001</p> <p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on open, level ground, 8 lks. E. of trail road, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 18' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
2.15	Dry wash, 15 lks. wide, 3 ft. deep, drains NW.
18.19	Graded road, 18 lks. wide, bears NE. and SW.
39.96	<p>The cor. of secs. 8, 9, 16, and 17, reestablished by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, ¾ ins. diam., 30 ins. long, firmly set 23 ins. in the ground, in a rubber tire, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 8 9 17 16 2001, with a steel fence post nearby. This position is accepted as a careful and faithful reestablishment of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 8 S 9 ----- S 17 S 16 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>Cor. is located on open, level ground, 65 lks. E. of trail road, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>N. 89° 50' W., bet. secs. 9 and 16.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.98	<p>Over open, gently rolling terrain.</p> <p>The 1/4 sec. cor. of secs. 9 and 16, monumented with an eroded and crumbling sandstone, 11x9x4 ins., loosely set 5 ins. in the ground, dimly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T29N R108W S 9 1/4 ——— S 16 2002 </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, gently rolling ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 89° 56' W., beginning new measurement.</p> <p>Over open, gently rolling terrain.</p>
39.91	<p>The cor. of secs. 8, 9, 16, and 17.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0° 36' W., bet. secs. 8 and 9.</p> <p>Over open, gently rolling terrain.</p>
39.96	<p>The 1/4 sec. cor. of secs. 8 and 9, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 10 ins. in the ground, in a rubber tire, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S8 S9 1997, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T29N R108W 1/4 S 8 S 9 2001
	<p>Bury the reinforcement rod alongside the iron post.</p> <p>Cor. is located on open, level ground, 2 chs. W. of trail road, bears NE. and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 31' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.92	<p>The cor. of secs. 4, 5, 8, and 9, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 18 ins. in the ground, in a rubber tire, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 5 4 8 9 1994, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p>
	T29N R108W S 5 S 4 <hr style="width: 20%; margin: 0 auto;"/> S 8 S 9 2002
	<p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, gently rolling ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>N. 89° 55' W., bet. secs. 4 and 9.</p> <p>Over open, gently rolling terrain.</p>
40.00	<p>The 1/4 sec. cor. of secs. 4 and 9, at proportionate distance, there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, atop a "DEEP-1" magnetic marker, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 4 1/4 ——— S 9 2002</p>
80.00	<p>Cor. is located on open, level ground, 2.75 chs. N. of graded road, bears NE. and SW.</p> <p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/> <p>N. 0° 50' W., bet. secs. 4 and 5.</p> <p>Over open, gently rolling terrain.</p>
0.65	<p>Edge of bluff, approximately 30 ft. high, bears irregularly E. and W., descend moderate N. slope.</p>
39.77	<p>The 1/4 sec. cor. of secs. 4 and 5, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 5 4 1997, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 5 S 4 2001</p> <p>Bury the reinforcement rod alongside the iron post, and set a 4 ins. square oak post nearby.</p> <p>Cor. is located on open, level ground, on the S. side of a broad, shallow drainage, approximately 2 chs. wide, drains WSW.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.54	<p>N. 0° 43' W., beginning new measurement.</p> <p>Over open, gently rolling terrain.</p> <p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp.</p> <p>N. 0° 02' W., bet. secs. 31 and 32.</p> <p>Over open, level terrain, along fence.</p>
9.47	<p>Center of cattle guard on graded road, road is 23 lks. wide, bears E. and W.</p>
36.25	<p>Graded road, 17 lks. wide, bears ENE. and WSW.</p>
39.91	<p>The 1/4 sec. cor. of secs. 31 and 32, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, in 4 strand barb wire fence, bears N. and S., with a tire filled with stones W. of the cor., with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYOMING and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W 1/4 S 31 S 32 1995</p> </div> <p>This position is accepted as a careful and faithful perpetuation of the original cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 01' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.02	<p>The cor. of secs. 29, 30, 31, and 32, determined from collateral evidence by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with a steel reinforcement rod, 3/4 ins. diam., firmly set in top of wooden fence cor., 6x8 ins. square, 5 ft. high, with fences extending E. and S., with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO T29N R108W S30 S29 S32 S31 1995, on West side of the fence cor. The steel reinforcement rod in the top of the wooden fence cor. is accepted as a careful and faithful determination of the original cor. position.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.65	<p>from which</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set flush with the surface of the ground, over broken brown glass, for a reference monument, bears N. 44° 38' E., 58.0 lks. dist., with brass cap mkd. T29N R108W S29 RM 38.3 FT TO COR 2002 and an arrow pointing to the cor. Set a steel fence post nearby.</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set flush with the surface of the ground, over broken brown glass, for a reference monument, bears N. 42° 35' W., 80.9 lks. dist., with brass cap mkd. T29N R108W S30 RM 53.4 FT TO COR 2002 and an arrow pointing to the cor. Set a steel fence post nearby.</p> <p>From this point, a monument established by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, a steel reinforcement rod, ¾ ins. diam., firmly set, projecting 10 ins. above the ground, on the N. side of fence post described above, with aluminum cap mkd. UINTAH ENG LS 489 T29N R108W 30 29 32 31 1994, bears NORTH, 1 lk. dist. This position was established using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 89° 57' W., bet. secs. 29 and 32.</p> <p>Over open, level terrain.</p> <p>The ¼ sec. cor. of secs. 29 and 32, perpetuated by Paul N. Scherbel, Wyoming Professional Land Surveyor No. 164, monumented with an iron post, 2½ ins. diam., firmly set, projecting 16 ins. above the ground, in fence bears E. and W., with a tire filled with stones N. of the cor., with brass cap inscribed PAUL N. SCHERBEL PLS 164 BIG PINEY WYO and mkd.</p> <p style="text-align: center;">T29N R108W S 29 1/4 ——— S 32 1995</p> <hr/> <p>S. 89° 50' W., beginning new measurement.</p> <p>Over open, level terrain, along a barbed wire fence.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.03	<p>The cor. of secs. 29, 30, 31, and 32.</p> <hr/> <p>S. 89° 46' W., bet. secs. 30 and 31.</p> <p>Over open, level terrain.</p>
40.05	<p>The 1/4 sec. cor. of secs. 30 and 31, monumented with a river rock, 8x5x4 ins., firmly set 4 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W</p> <p style="margin-left: 100px;">S 30</p> <p style="margin-left: 100px;">1/4 ———</p> <p style="margin-left: 100px;">S 31</p> <p style="margin-left: 100px;">2002</p> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>N. 89° 48' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
39.49	<p>The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp.</p> <hr/> <p>From the cor. of secs. 29, 30, 31, and 32.</p> <p>N. 0° 22' W., bet. secs. 29 and 30.</p> <p>Over open, level terrain.</p>
40.02	<p>The 1/4 sec. cor. of secs. 29 and 30, monumented with a river rock, 9x5x4 ins., firmly set 4 ins. in the ground, in a rubber tire, plainly mkd. 1/4 on W. face, with 3 steel reinforcement rods alongside, and a steel fence post nearby.</p> <p>At the corner point</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 30 S 29 2002</p> <p>Bury the original stone and the reinforcement rod alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 12' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
8.90	Road, bears E. and W.
40.03	<p>The cor. of secs. 19, 20, 29, and 30, monumented with a river rock, 8x6x6 ins., firmly set 4 ins. in the ground, plainly mkd. 5 grooves on E. face, and 2 grooves on S. face, with a steel reinforcement rod, 30 ins. long. ¾ ins. diam., 2 ins. below the surface of the ground, set alongside, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 19 S 20 ----- S 30 S 29 2002</p> <p>Bury the original stone and reinforcement rod alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>S. 89° 58' W., bet. secs. 20 and 29.</p> <p>Over open, level terrain.</p>
39.93	<p>Point for the ¼ sec. cor. of secs. 20 and 29, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T29N R108W S 20 1/4 ——— S 29 2002</p> <p>Set a steel fence post nearby.</p> <p>From this point, a small mound of flat stones of unknown origin, 1 ft. base, 6 ins. high, with a steel fence post nearby, bears NNW., 7.5 lks. dist.</p>
79.86	<p>The cor. of secs. 19, 20, 29, and 30.</p> <hr/> <p>S. 89° 37' W., bet. secs. 19 and 30.</p>
40.03	<p>Over open, level terrain.</p> <p>The 1/4 sec. cor. of secs. 19 and 30, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 27 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S19 S30 1995, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T29N R108W S 19 1/4 ——— S 30 2002</p> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>N. 89° 49' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
38.80	<p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.02	<p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 0° 24' W., bet. secs. 19 and 20.</p> <p>Over open, level terrain.</p> <p>The 1/4 sec. cor. of secs. 19 and 20, perpetuated by Dick R. Griffin, Wyoming Professional Land Surveyor No. 2875, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. LS 2785, with the original stone, an eroded and crumbling sandstone, 18x6x1 ins., firmly set, broken off flush with the surface of the ground, with top piece, dimly mkd. 1/4 on a face, laying atop the ground alongside. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W 1/4 S 19 S 20 2002</p> </div> <p>Bury the original stone and the reinforcement rod alongside the iron post.</p> <p>Cor. is located on open, level ground, 6.40 chs. E. of a dry wash, 20 lks. wide, 3 ft. deep, drains S.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 13' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.00	<p>The cor. of secs. 17, 18, 19, and 20, monumented with an eroded and crumbling sandstone, 14x11x2 ins., firmly set 3 ins. in the ground, dimly mkd. 5 grooves on E. face, and 3 notches on S. edge, with a mound of stone, 2 ft. base, 1 ft. high, W. of the cor., and a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr> <td>T29N</td> <td>R108W</td> </tr> <tr> <td>S 18</td> <td>S 17</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S 19</td> <td>S 20</td> </tr> <tr> <td colspan="2">2002</td> </tr> </table> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>N. 89° 52' W., bet. secs. 17 and 20.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 18	S 17	<hr/>		S 19	S 20	2002	
T29N	R108W										
S 18	S 17										
<hr/>											
S 19	S 20										
2002											
38.10	Dry wash, 20 lks. wide, drains SSW.										
39.75	<p>The 1/4 sec. cor. of secs. 17 and 20., perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 24 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 S17 S20 1995, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T29N</td> <td>R108W</td> </tr> <tr> <td colspan="2">S 17</td> </tr> <tr> <td>1/4</td> <td><hr/></td> </tr> <tr> <td colspan="2">S 20</td> </tr> <tr> <td colspan="2">2002</td> </tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>S. 89° 45' W., beginning new measurement.</p> <p>Over open, level terrain.</p>	T29N	R108W	S 17		1/4	<hr/>	S 20		2002	
T29N	R108W										
S 17											
1/4	<hr/>										
S 20											
2002											
20.79	Graded road, 32 lks. wide, bears NNE. and SSW.										

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.01	<p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/> <p>S. 89° 32' W., bet. secs. 18 and 19.</p> <p>Over open, level terrain.</p>
40.01	<p>The 1/4 sec. cor. of secs. 18 and 19, monumented with an eroded and crumbling sandstone, 12x10x2 ins., firmly set 5 ins. in the ground, dimly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, atop a "DEEP-1" magnetic marker and broken green glass, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W</p> <p style="margin-left: 100px;">S 18</p> <p style="margin-left: 100px;">1/4 ———</p> <p style="margin-left: 100px;">S 19</p> <p style="margin-left: 100px;">2002</p> </div> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>N. 89° 48' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
37.96	<p>The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp.</p> <hr/> <p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0° 08' W., bet. secs. 17 and 18.</p> <p>Over open, level terrain.</p>
40.04	<p>The 1/4 sec. cor. of secs. 17 and 18, monumented with an eroded and crumbling sandstone, 18x12x3 ins., firmly set 14 ins. in the ground, dimly mkd. 4 on W. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T39N R108W 1/4 S 18 S 17 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 54' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.11	<p>The cor. of secs. 7, 8, 17, and 18, monumented with an eroded and crumbling sandstone, 18x10x3 ins., firmly set 9 ins. in the ground, dimly mkd. 5 grooves on E. face, and 5 notches on S. edge, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 7 S 8 ----- S 18 S 17 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr/> <p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>N. 89° 41' W., bet. secs. 8 and 17.</p> <p>Over open, level terrain.</p>
39.98	<p>The 1/4 sec. cor. of secs. 8 and 17, monumented with a sandstone, 19x17x2 ins., firmly set 10 ins. in the ground, dimly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T29N R108W S 8 1/4 ——— S 17 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on open, level ground, 1.30 chs. S. of graded road, 25 lks. wide, bears E. and W.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 58' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
40.02	<p>The cor. of secs. 7, 8, 17, and 18.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>S. 89° 43' W., bet. secs. 7 and 18.</p> <p>Over open, level terrain.</p>
40.04	<p>The 1/4 sec. cor. of secs. 7 and 18, monumented with a sandstone, 9x6x2 ins., loosely set 4 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post nearby.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T29N R108W S 7 1/4 ——— S 18 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 40' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
36.72	<p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp.</p> <hr style="width: 60%; margin: 10px auto;"/>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS																					
39.99	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0° 34' W., bet. secs. 7 and 8.</p> <p>Over open, level terrain.</p> <p>The 1/4 sec. cor. of secs. 7 and 8, perpetuated by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, monumented with a steel reinforcement rod, 3/4 ins. diam., 30 ins. long, firmly set 20 ins. in the ground, with aluminum cap mkd. UINTAH ENG & LS WYO 489 T29N R108W 1/4 7 8 1995, with a steel fence post nearby. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="4">T29N R108W</td></tr> <tr><td colspan="4">1/4</td></tr> <tr><td>S</td><td style="border-left: 1px solid black; border-right: 1px solid black;">7</td><td>S</td><td>8</td></tr> <tr><td colspan="4">2002</td></tr> </table> </div> <p>Bury the reinforcement rod alongside the iron post.</p> <p>The cor. is located on open, level ground.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 41' W., beginning new measurement.</p> <p>Over open, level terrain.</p>	T29N R108W				1/4				S	7	S	8	2002							
T29N R108W																					
1/4																					
S	7	S	8																		
2002																					
39.93	<p>The cor. of secs. 5, 6, 7, and 8, monumented with an eroded and crumbling sandstone, 9x9x4 ins., firmly set 8 ins. in the ground, mkd. faint chisel mks. on the top and on the S. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="4">T29N R108W</td></tr> <tr><td>S</td><td style="border-left: 1px solid black; border-right: 1px solid black;">6</td><td>S</td><td>5</td></tr> <tr><td colspan="4"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>S</td><td style="border-left: 1px solid black; border-right: 1px solid black;">7</td><td>S</td><td>8</td></tr> <tr><td colspan="4">2002</td></tr> </table> </div>	T29N R108W				S	6	S	5	<hr style="width: 50%; margin: 0 auto;"/>				S	7	S	8	2002			
T29N R108W																					
S	6	S	5																		
<hr style="width: 50%; margin: 0 auto;"/>																					
S	7	S	8																		
2002																					

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Bury the mkd. stone alongside the iron post, and set a 3 in. square oak post nearby.</p> <p>Cor. is located on E. side of shallow drain, drains SSW.</p> <p>From this point, a monument established by Lawrence C. Kay, Wyoming Professional Land Surveyor No. 489, a steel reinforcement rod, 3/4 ins. diam., firmly set, projecting 7 ins. above ground, with an aluminum cap mkd. UINTAH ENG LS 489 T29N R108W S6 S5 S8 S7 1997, bears N. 74° 05' E., 79.8 lks. dist. This position was established using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>N. 89° 50' W., bet. secs. 5 and 8.</p> <p>Over open, level terrain.</p>
40.04	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, atop a "DEEP-1" magnetic marker and an inverted brown glass bottle, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T29N R108W</p> <p style="margin-left: 100px;">S 5</p> <p style="margin-left: 100px;">1/4 ———</p> <p style="margin-left: 100px;">S 8</p> <p style="margin-left: 100px;">2002</p> </div> <p>Cor. is located 55 lks. E. of trail road, bears N. and S.</p>
80.08	<p>The cor. of secs. 5, 6, 7, and 8.</p> <hr/> <p>N. 89° 51' W., bet. secs. 6 and 7.</p> <p>Over open, level terrain.</p>
39.98	<p>The 1/4 sec. cor. of secs. 6 and 7, monumented with a quartzite stone, 14x6x3 ins., laying loose atop the ground, dimly mkd. 1/4 on a face.</p> <p>At the corner point</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a "DEEP-1" magnetic marker and broken brown glass, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W S 6 1/4 ——— S 7 2002</p> <p>Bury the original stone alongside the iron post.</p> <p>Cor. is located on open, level ground, 1.90 chs. N. of dry wash, 30 lks. wide, 1 ft. deep, drains WSW.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 89° 16' W., beginning new measurement.</p> <p>Over open, level terrain.</p>
35.51	<p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0° 47' W., bet. secs. 5 and 6.</p> <p>Over open, level terrain.</p>
39.70	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance, there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, atop a "DEEP-1" magnetic marker and an inverted brown glass bottle, with brass cap mkd.</p> <p style="text-align: center;">T29N R108W 1/4 S 6 S 5 2002</p>
79.42	<p>Raise a mound of stone, 3 ft. base, 1 ft. high, W. of the cor. and set a steel fence post nearby.</p> <p>The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp</p> <hr style="width: 80%; margin: 10px auto;"/>

T. 29 N., R. 108 W., Sixth Principal Meridian, Wyoming

CHAINS	GENERAL DESCRIPTION
	<p>The area encompassed by this survey is situated in the south central portion of Sublette County, approximately 66 miles north-northwest of Rock Springs, Wyoming. The terrain varies from level to gently rolling, with an average elevation of 7,200 feet above sea level. The soil is a mixture of sand, sandy loam and clay with scattered areas of exposed sandstone bedrock. Vegetation is primarily sagebrush, cacti, and sparse native grasses.</p> <p>The primary drainage through the township is Sand Draw which generally courses southwest. There is concentrated mineral development and numerous natural gas wells scattered throughout the various sections. Although some evidence of stock raising was observed during the course of this survey, no permanent residences were noted.</p> <p>Primary access is provided by Wyoming State Highway No. 191, then Luman and North Jonah roads, secondary access is via numerous graded trail roads which are utilized to access the various natural gas wells located throughout the township.</p>

CERTIFICATE OF SURVEY

I, Olian T. Shockley, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of March, 2001, I have dependently resurveyed the Seventh Standard Parallel North through Range 108 West, the Thirteenth Auxiliary Guide Meridian through Township 29 North, between Ranges 108 and 109 West, the east and north boundaries, and subdivisional lines, Township 29 North, Range 108 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

MAY 26 2004

 (Date)



 (Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of the Seventh Standard Parallel North through Range 108 West, the Thirteenth Auxiliary Guide Meridian through Township 29 North, between Ranges 108 and 109 West, the east and north boundaries, and subdivisional lines, Township 29 North, Range 108 West, Sixth Principal Meridian, Wyoming, executed by Olian T. Shockley, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

MAY 26 2004

 (Date)

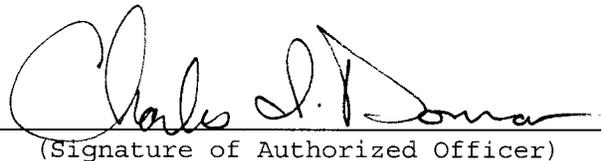

 (Signature of Authorized Officer)