8233

Click Here for Field Notes

ORIGINAL

TOWNSHIP 44 NORTH, RANGE 75 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

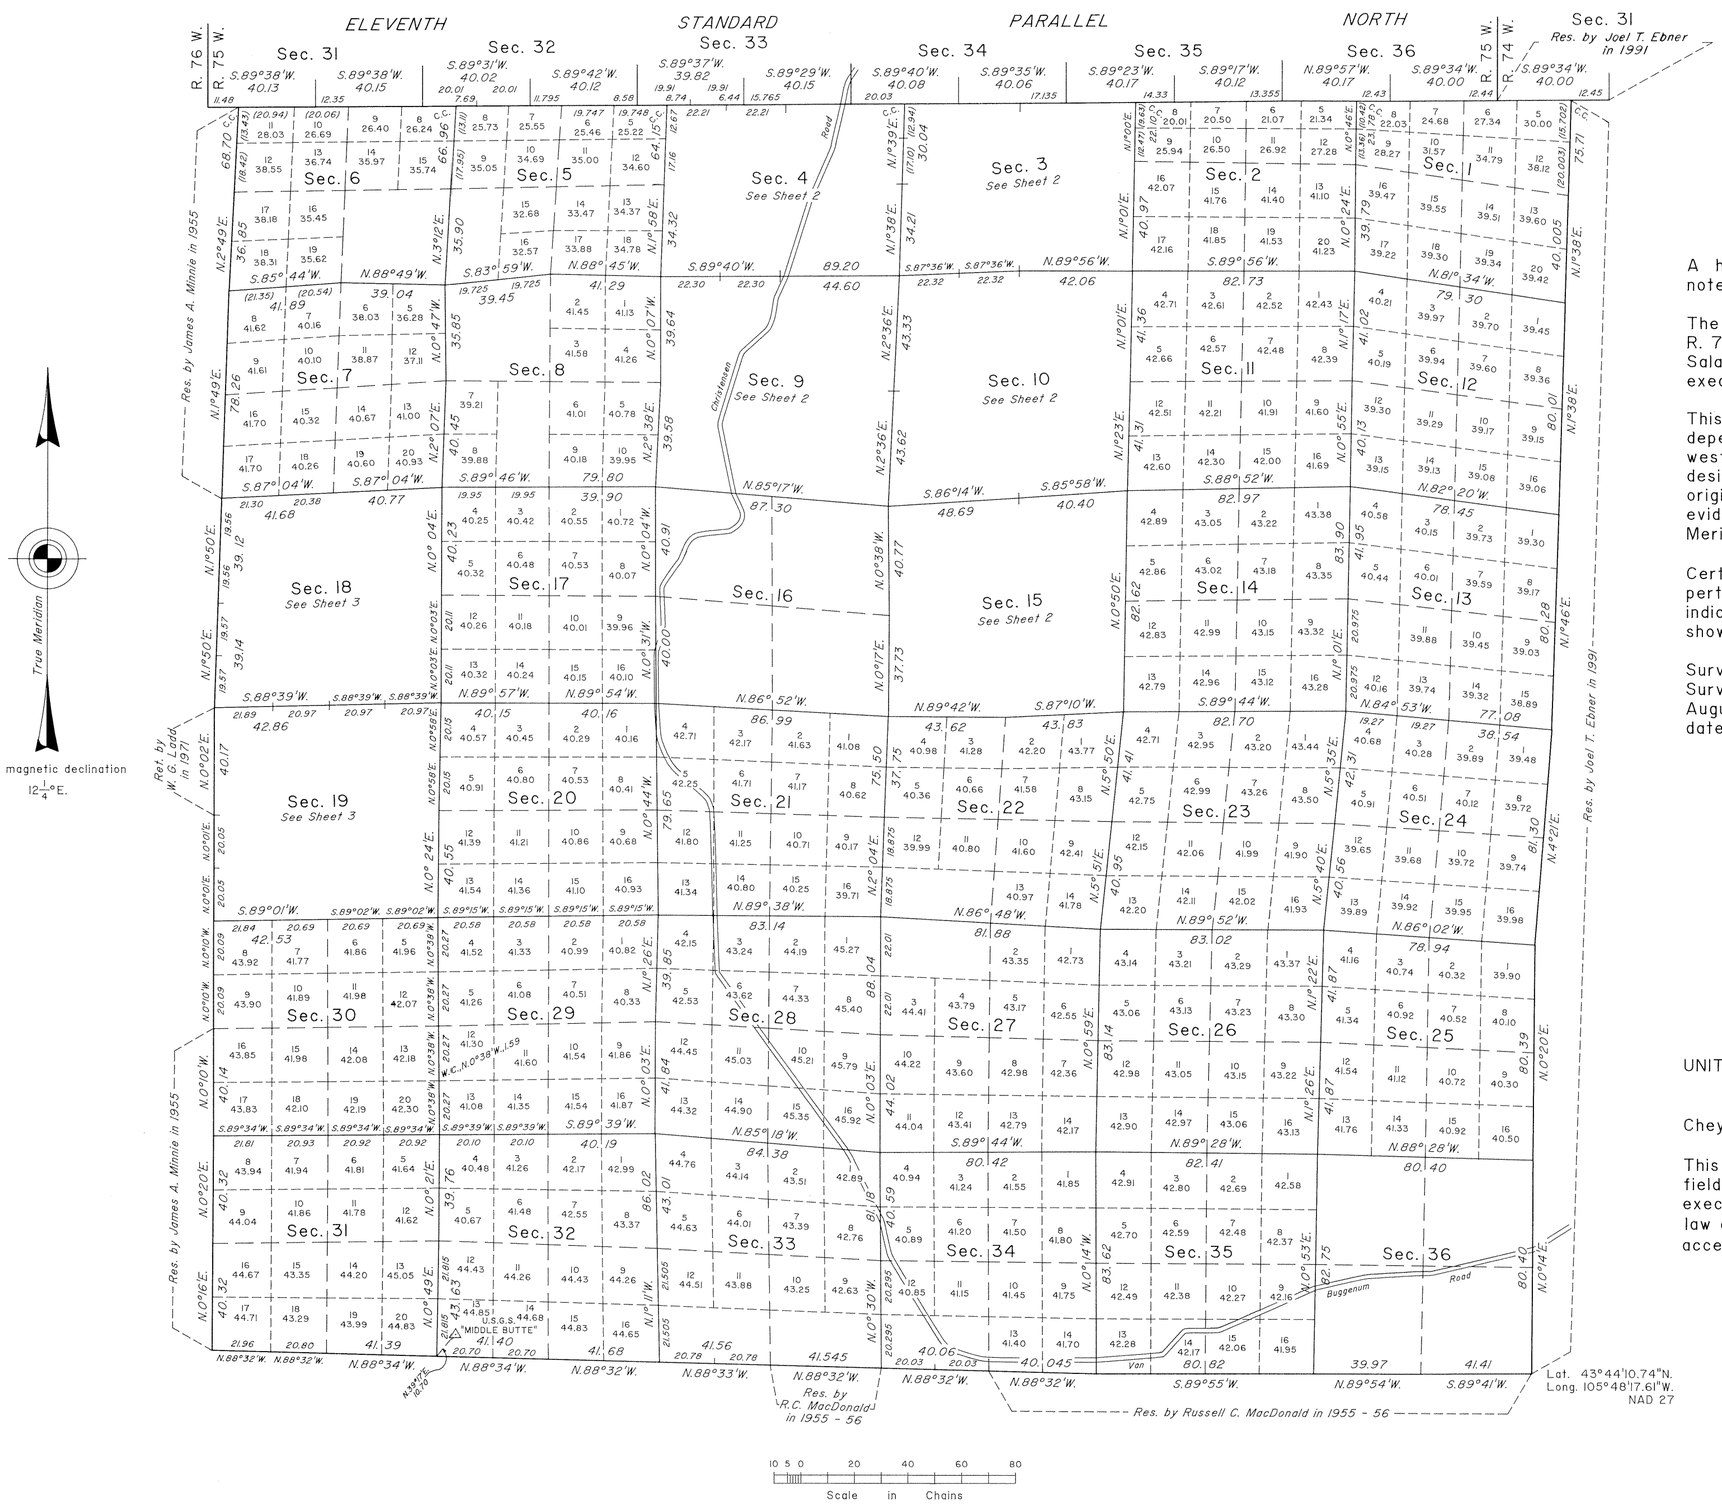

A history of surveys is contained in the field notes.

The Eleventh Standard Parallel North, through R. 75 W., was dependently resurveyed by Joe R. Salazar during the resurvey of T. 45 N., R. 75 W., executed concurrently under this same group.

This plat, in three Sheets, represents the dependent resurvey of portions of the south and west boundaries, and the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, T. 44 N., R. 75 W., Sixth Principal Meridian, Wyoming.

Certain modified lots and areas shown hereon pertain to Federal interest estate only. Except as indicated hereon, the lottings and areas are as shown on the plat approved December 11, 1882.

Survey executed by Joel T. Ebner, Cadastral Surveyor, beginning May 12, 1993, and completed August 18, 1993, pursuant to Special Instructions dated April 2, 1992, for Group No. 558, Wyoming.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming September 28, 1998

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee

Chief Cadastral Surveyor for Wyoming

Lat. 43°44'10.74"N.
Long. 105°48'17.61"W.
NAD 27

W.H.B.

1052 A

OFFICIALLY FILED: November 12, 1998

JZM

TOWNSHIP 44 NORTH, RANGE 75 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

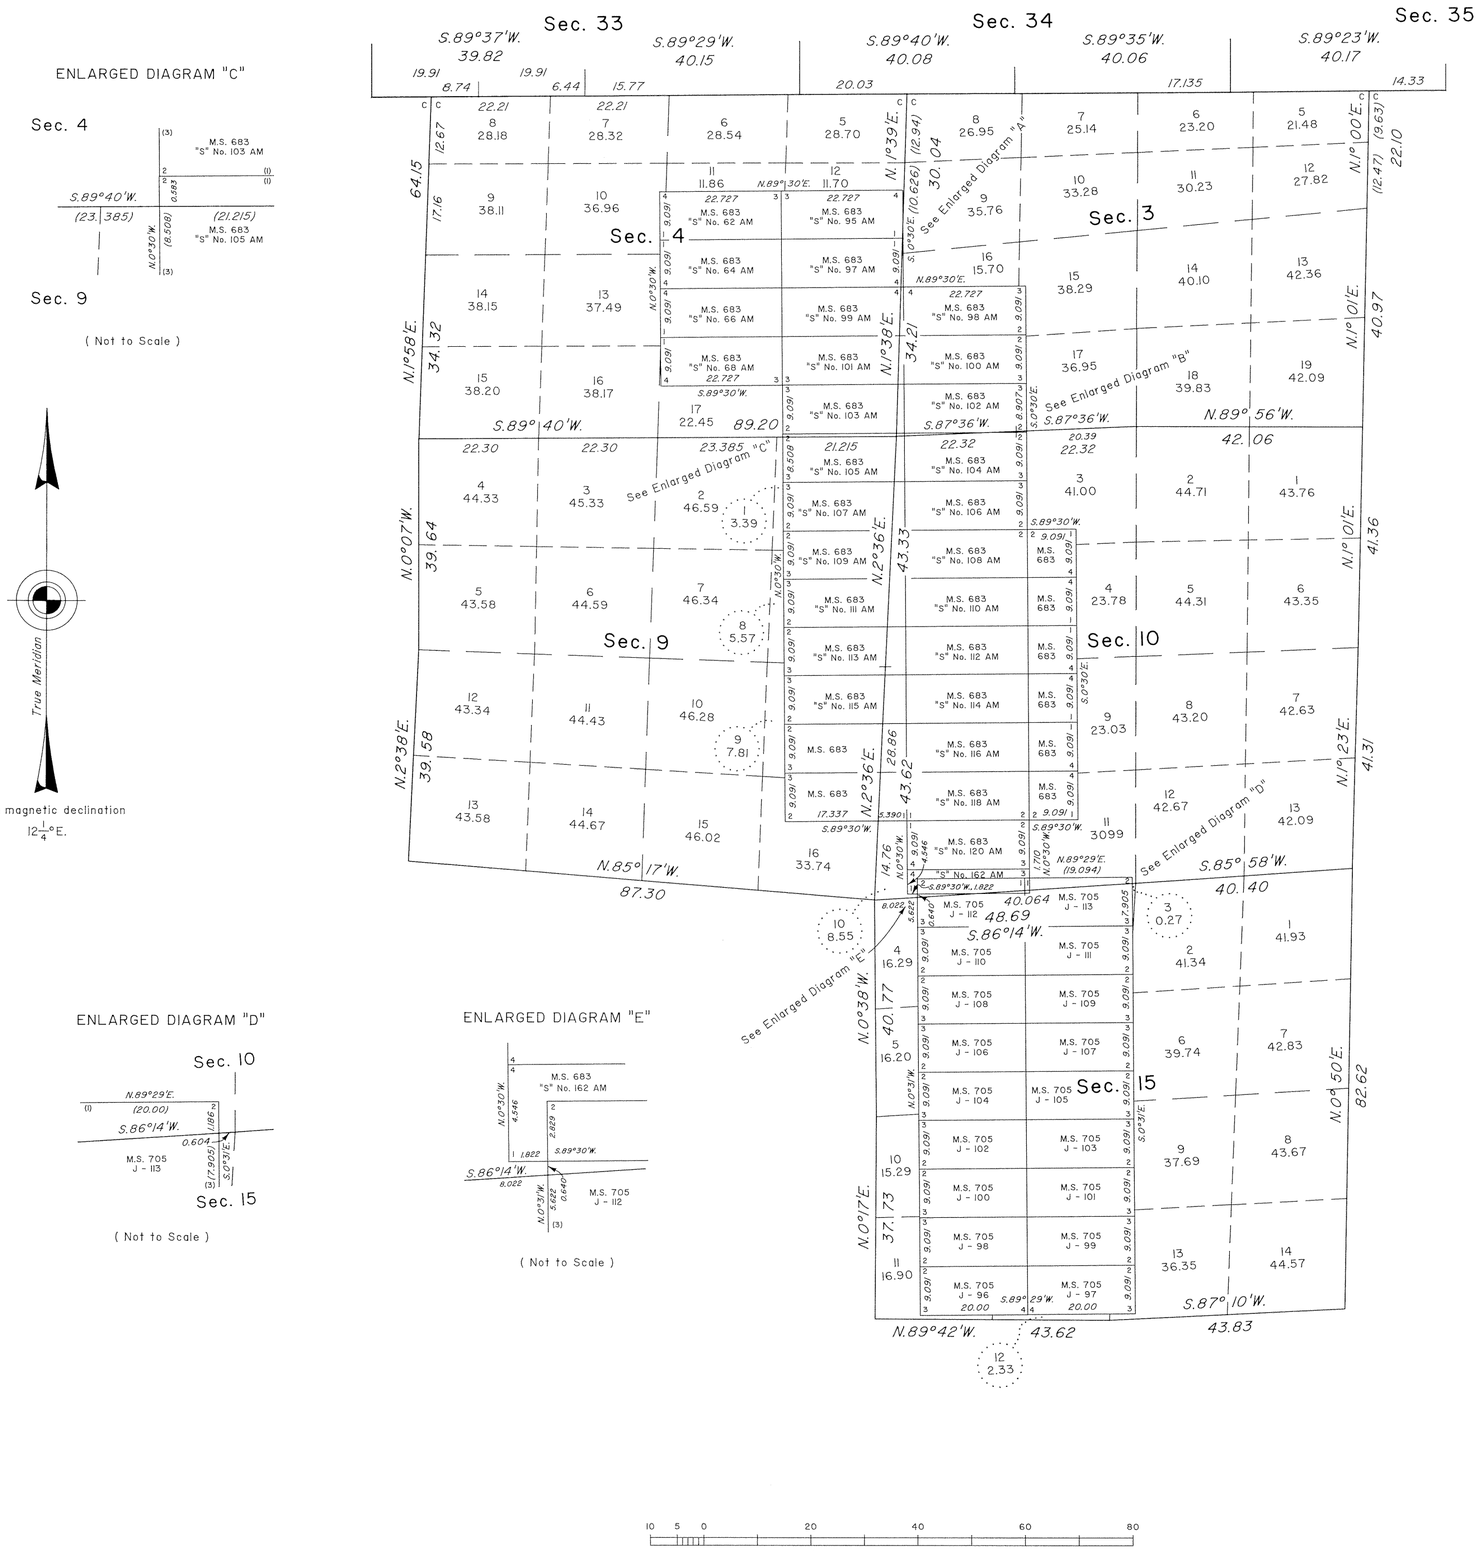

ENLARGED DIAGRAM "C"

(Not to Scale)

ENLARGED DIAGRAM "A"



(Not to Scale)

ENLARGED DIAGRAM "B"



(Not to Scale)

Reference should be made to Sheet No. 1 for survey information.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming September 28, 1998

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee

Chief Cadastral Surveyor for Wyoming

ENLARGED DIAGRAM "D"

(Not to Scale)

ENLARGED DIAGRAM "E"

(Not to Scale)



W.H.B.

JZM

OFFICIALLY FILED: November 12, 1998

TOWNSHIP 44 NORTH, RANGE 75 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

ENLARGED DIAGRAM "A"



(Not To Scale)

ENLARGED DIAGRAM "B"



(Not To Scale)

ENLARGED DIAGRAM "C"



(Not To Scale)

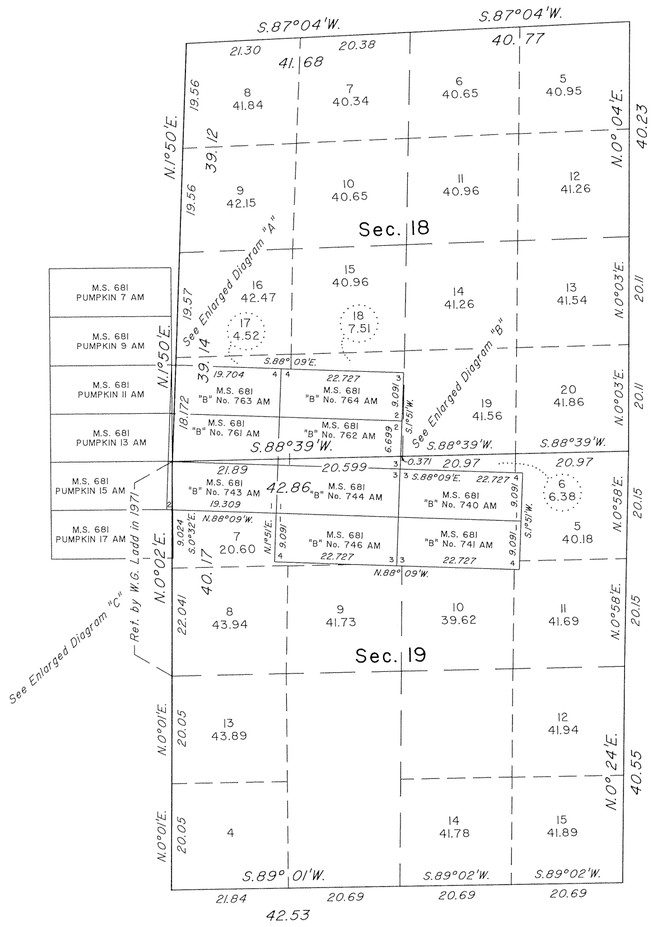



Mean magnetic declination
$12\frac{1}{4}°$E.

Reference should be made to Sheet No. I for survey information.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming September 28, 1998

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee

Chief Cadastral Surveyor for Wyoming



W.H.B.

JLM

OFFICIALLY FILED: November 12, 1998

(16)

1431

Click Here for Field Notes

11

TOWNSHIP N° 44 NORTH RANGE N° 75 WEST OF SIXTH PRINCIPAL MERIDIAN.

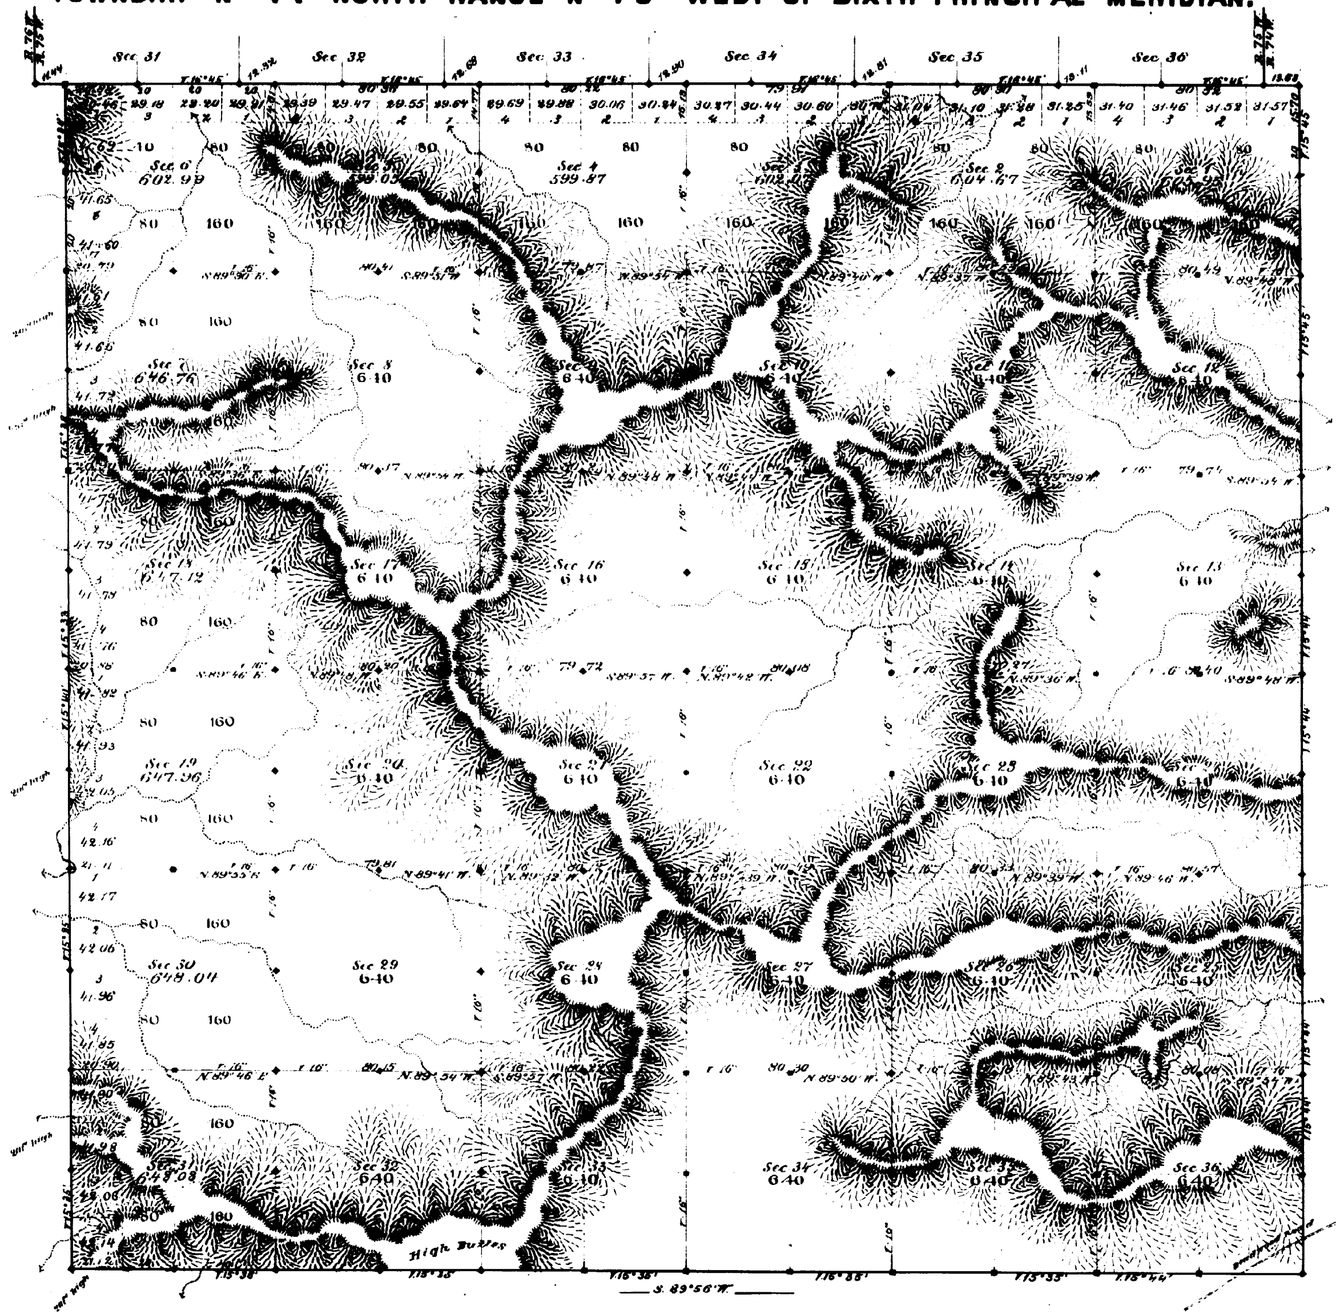

Total number of Acres: 22851.56

Surveys designated	By Whom surveyed	Date of Contract	Amount of Surveys Mile	Amount of Surveys Fac.	Amount of Surveys Lks.	When surveyed	Magn. Variation.
6th P.S.R.W. Township lines	McCarthy & Moore	Febr. 2. 1881	17	71	40	July 19 21 22 1881	15° 35' East
Subdivisions	Frank Burkley	April 27. 1882	59	64	81	July 3-10 1883	16° "
Connections				63	82		
11th Stand. Par. N.	McCarthy & Moore	Febr. 2. 1881	6	2	19	May 29 1881	

The above Map of Township N° 44 North of Range N° 75 West of the Sixth Principal Meridian in Wyoming Territory is strictly conformable to the field notes of the survey thereof on file in this Office, which have been examined and approved.

Surveyor Generals Office
Cheyenne Wyoming, December 11th 1882

Edw. L. Davis Surv. Gen'l

1052

44-75

(13)

Indexed

accession no 1111

Click Here for Field Notes

EXTERIOR LINES.

Scale, 3 miles to an inch. Magnetic Var. East.

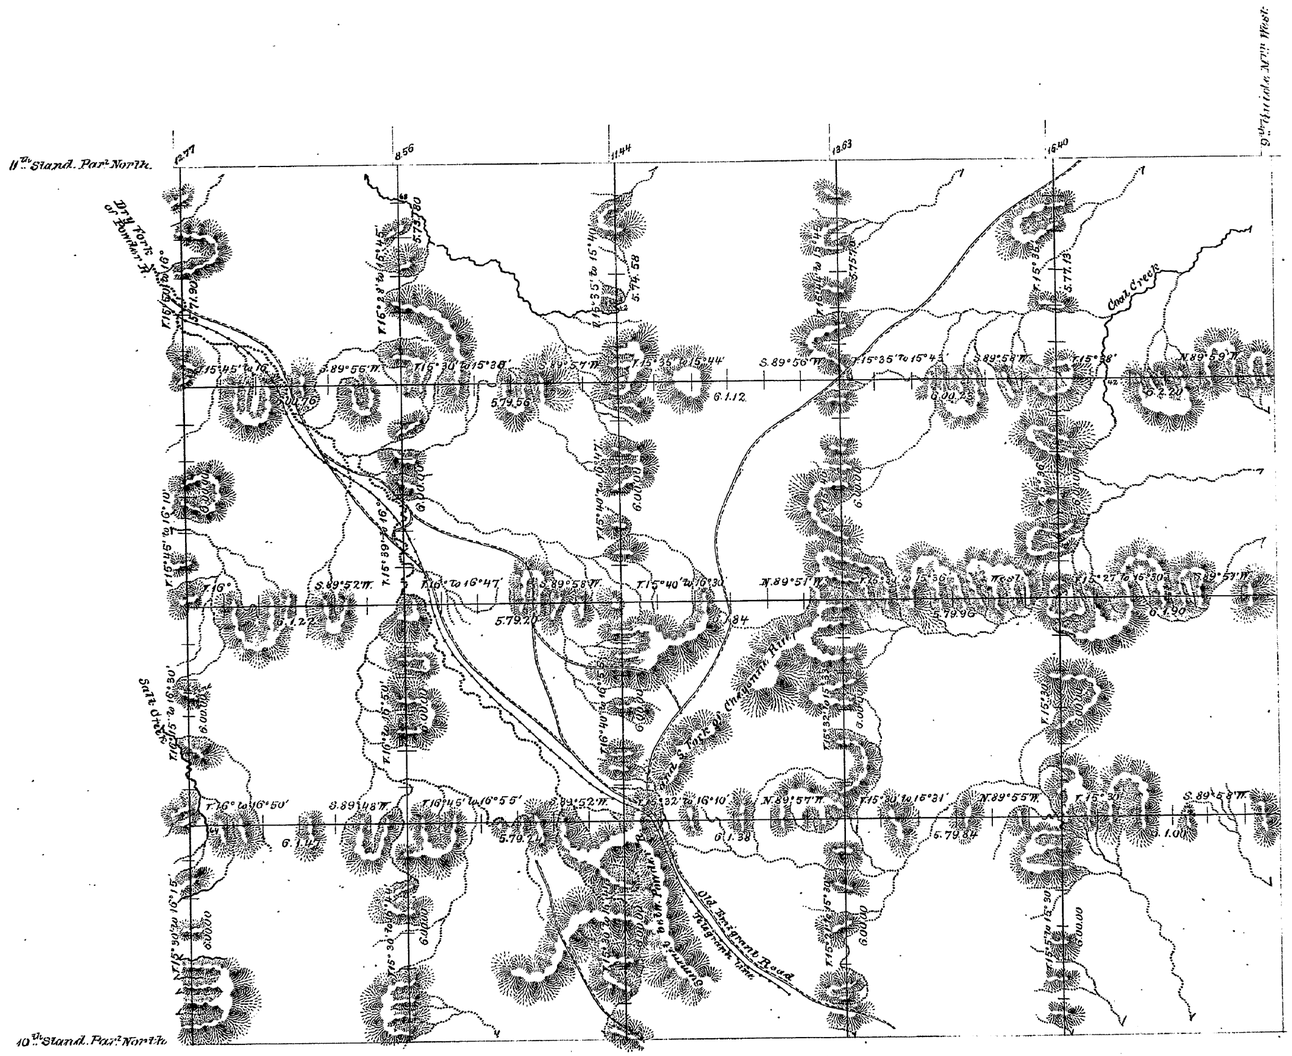
11th Stand. Par. North.
10th Stand. Par. North.
6th Principle Merid. West.
Old Southern Road
Chug Creek
Chug-a-Wah River
Rock Creek
Rock Creek
Rock Creek

7552

Sur. No. 705 Sheet 1 of 4

M.S. 683
"S" No. 120 AM

SW 1/4 Sec. 10

SE 1/4 Sec. 10

M.S. 683
"S" No. 162 AM

S.89°30'W. 120.28

S.81°30'15"W. 1866.70 (To Sec. Cor. 9, 10, 15 & 16)

186.72

59.77

112.88 N.0°30'W.

59.72 N.89°30'E.

412.90

1/4 Cor. 10/15

S.89°29'W. 1320.00

N.89°29'E. 1320.00

600.00

300.00

10.00

1310.00

J—112

J—113

S.0°31'E.

N.0°31'W.

D.H. No. 108
D.H. No. 104
D.H. No. 11
D.H. No. 99
D.H. No. 10
D.H. No. 101
D.H. No. 106
D.H. No. 110
D.H. No. 15
D.H. No. 16

Disc. Point & Disc. Drill Hole

N.89°29'E. 1320.00

S.89°29'W. 1320.00

J—110

J—111

J—108

J—109

J—106

J—107

N.63°32'32"W. 2074.28 (To Sec. Cor. 9, 10, 15 & 16)

D.H. No. 61
D.H. No. 62
D.H. No. 312
D.H. No. 63
D.H. No. 13
D.H. No. 14
D.H. No. 117
D.H. No. 124
D.H. No. 29
D.H. No. 113
D.H. No. 127
D.H. No. 130
D.H. No. 294
D.H. No. 119
D.H. No. 28
D.H. No. 118
D.H. No. 100
D.H. No. 33
D.H. No. 135
D.H. No. 86
D.H. No. 30
D.H. No. 53

NW 1/4 Sec. 15

NE 1/4 Sec. 15

True Meridian

Note:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

W.H.B.

(See Sheet 2)

705—1

7553

(See Sheet 1)

J – 108

J – 109

J – 106

J – 107

J – 104

J – 105

J – 102

J – 103

J – 100

J – 101

NW 1/4 Sec. 15

NE 1/4 Sec. 15

SW 1/4 Sec. 15

SE 1/4 Sec. 15

C 1/4 Sec. 15

N.89°29'E. 1320.00

S.89°29'W. 1320.00

N.0°31'W. 600.00

S.0°31'E. 600.00

N.0°31'W. 300.00

S.0°31'E. 300.00

1310.00

10.00

1130.

1020.

325.

81.

370

420.

Reservoir

Draw

N.41°19'37"W. (To Sec. Cor. 9,10,15&16)

2828.57

N.29°28'26"W. (To Sec. Cor. 9,10,15&16)

3818.23

Disc. Point & Disc. Drill Hole

D.H. No. 144

D.H. No. 140

D.H. No. 137

H.D. No. 32

D.H. No. 31

D.H. No. 142

D.H. No. 138

D.H. No. 145

D.H. No. 259

D.H. No. 34

D.H. No. 258

D.H. No. 82

D.H. No. 81

D.H. No. 35

D.H. No. 167

D.H. No. 158

D.H. No. 152

D.H. No. 37

D.H. No. 155

D.H. No. 151

D.H. No. 159

D.H. No. 36

D.H. No. 39

D.H. No. 56

D.H. No. 38

D.H. No. 40

D.H. No. 67

D.H. No. 68

D.H. No. 69

D.H. No. 41

D.H. No. 73

D.H. No. 58

True Meridian

Note:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

W.H.B.

(See Sheet 3)(See Sheet 4)

705-2

7554

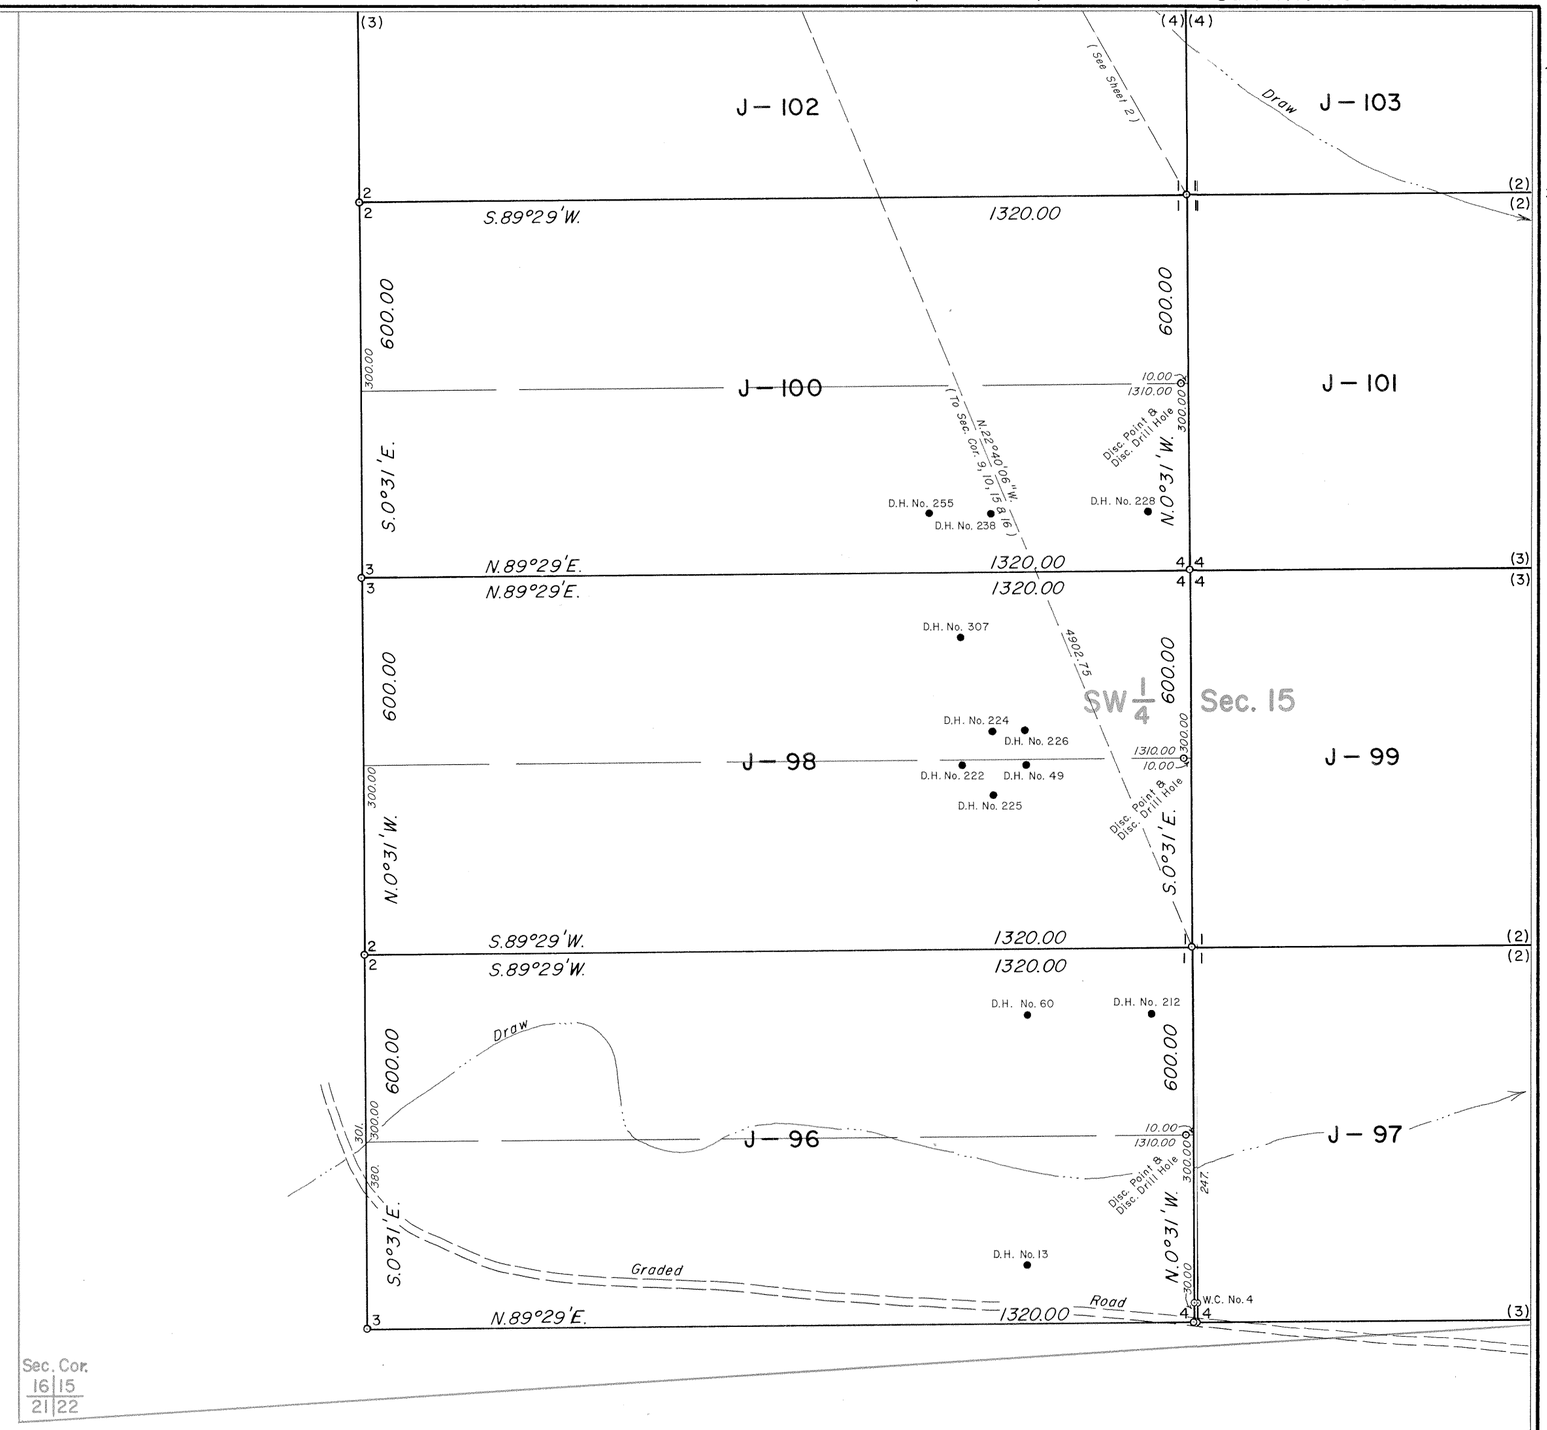

Note:
Reference will be made to the field notes for the drill holes not shown hereon.

W.H.B.

705–3

7555

Field Notes and Location Notices

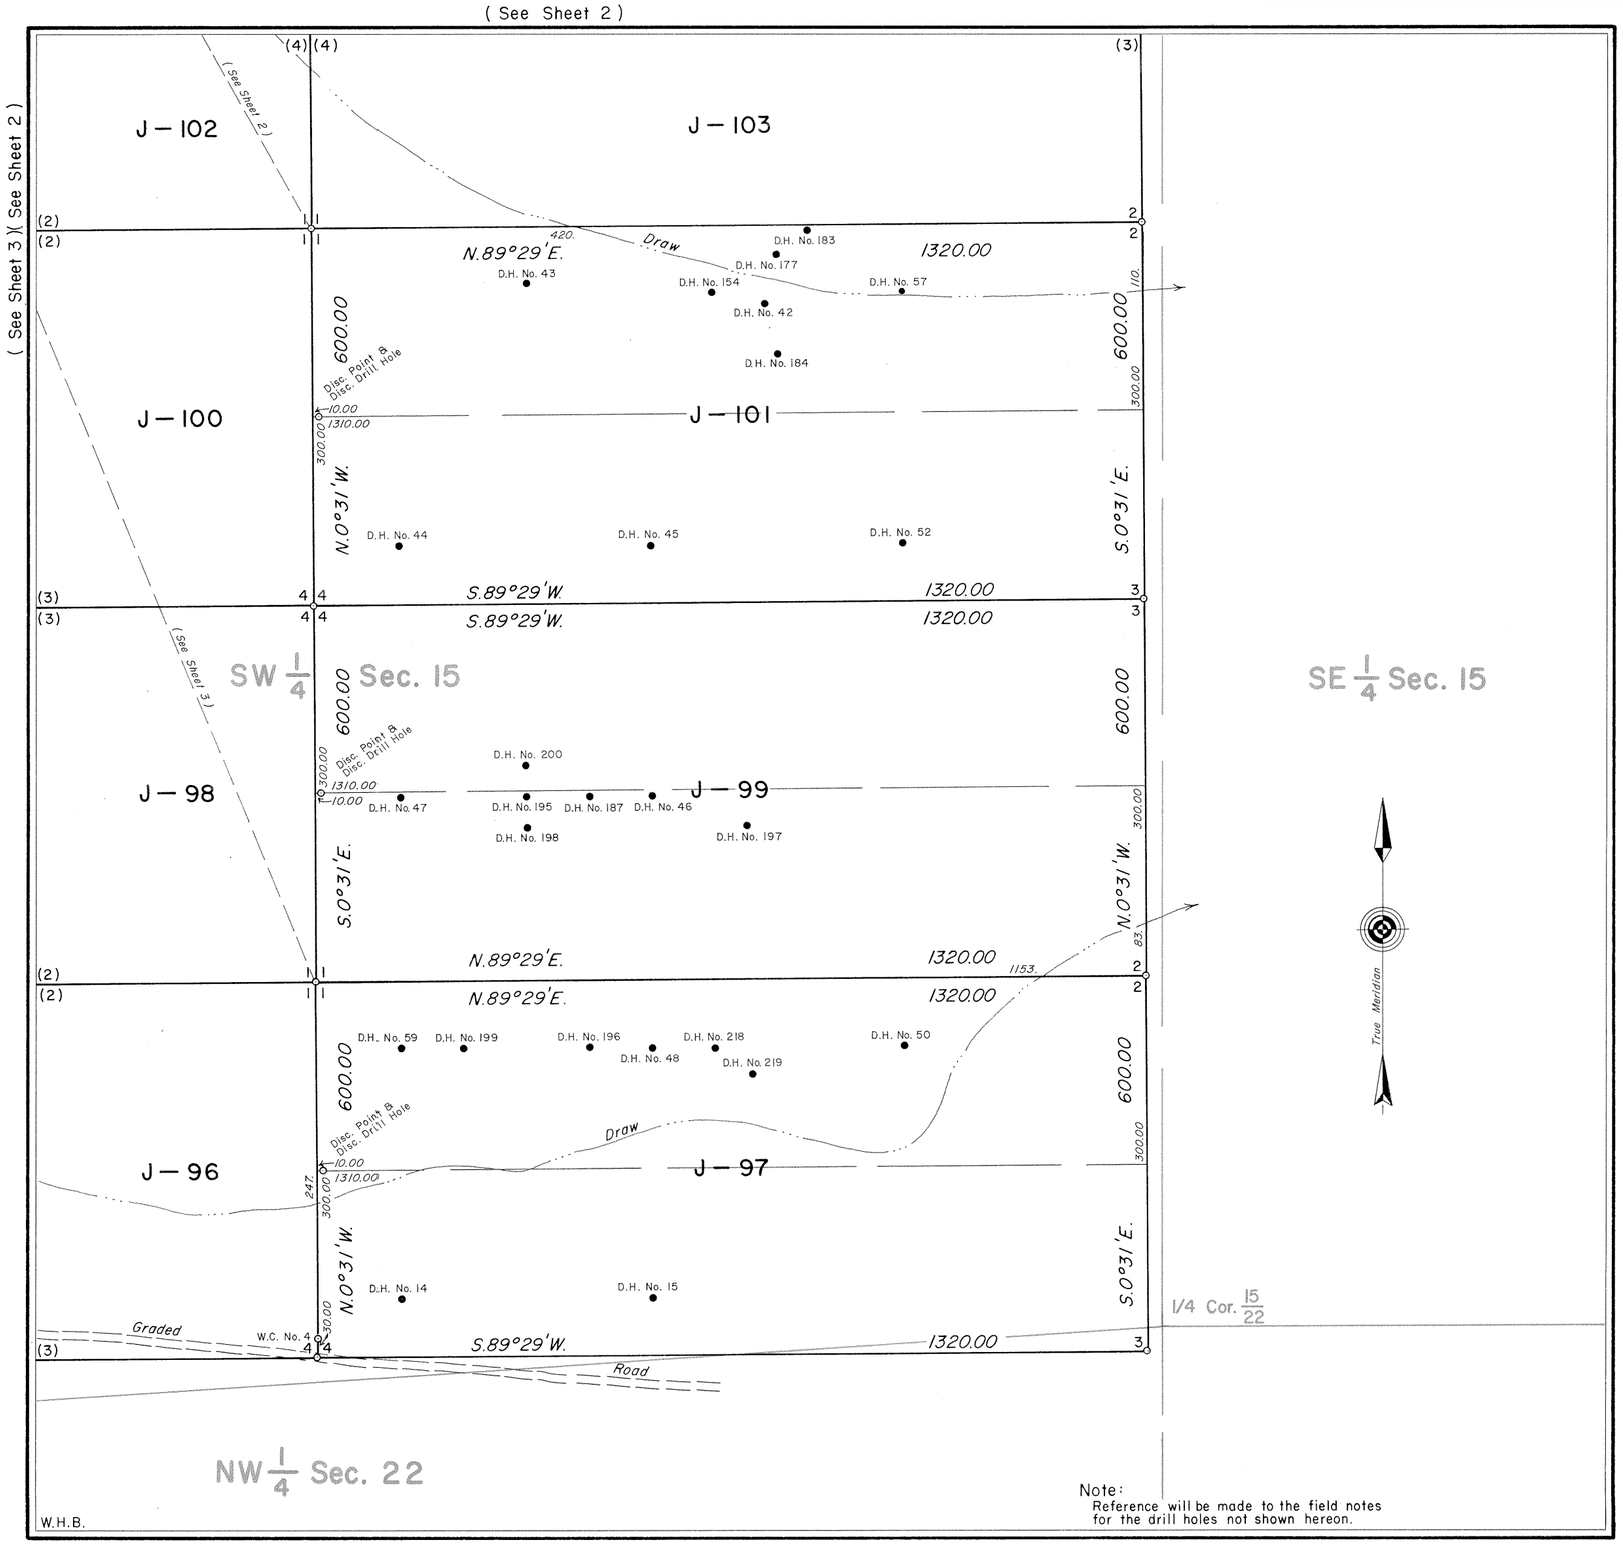

Note:
Reference will be made to the field notes for the drill holes not shown hereon.

MINERAL SURVEY No. 705 WYOMING

CLAIM OF

THE CLEVELAND – CLIFFS IRON COMPANY

KNOWN AS THE

J – 96 to J – 113 LODES

SITUATE IN
Secs. 10, 15 & 22, T. 44 N., R. 75 W., 6th. P.M.
CAMPBELL COUNTY
Lat. 43°46'52"N., Long. 105°51'46"W.,
at Cor. No. 3, J – 96 Lode

0 50 100 200 300 400 500 600
Feet
Magnetic Declination, 14° East.

Surveyed, May 19 to June 30, 1977
By William G. Ladd, Mineral Surveyor.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming *September 1, 1981*

I hereby certify that this plat of Mineral Survey No. 705, Wyoming, is strictly conformable to the field notes of said survey which have been examined and approved.

Richard L. Dales
Chief, Branch of Cadastral Survey

705–4

7200

Sur. No. 683 Sheet 1 of 3

"S" No. 62 AM

"S" No. 95 AM

SW¼ NW¼ Sec. 3

SE¼ NW¼ Sec. 3

Sec. 4

"S" No. 64 AM

"S" No. 97 AM

1/4 Cor. 4|3

"S" No. 66 AM

"S" No. 99 AM

NW¼ SW¼ Sec. 3

"S" No. 98 AM

NE¼ SW¼ Sec. 3 H.E. No. 849608

"S" No. 68 AM

"S" No. 101 AM

"S" No. 100 AM

SE¼ SW¼ Sec. 3 H.E. No. 848598

"S" No. 103 AM

SW¼ SW¼ Sec. 3

"S" No. 102 AM

"S" No. 105 AM

Sec. Cor. 4|3 9|10

"S" No. 104 AM

W 1/16 Cor. 3/10

True Meridian

Note
Reference will be made to the field notes for the numerous drill holes not shown hereon

W.H.B.

(See Sheet 2)

683-1

7201

(See Sheet 1)

Sur. No. 683 Sheet 2 of 3

"S" No. 103 AM

"S" No. 102 AM

W 1/16 Cor. 3/10

1/4 Cor. 3/10

Sec. Cor. 4 3 / 9 10

"S" No. 105 AM

"S" No. 104 AM

"S" No. 107 AM

NW 1/4 NW 1/4 Sec. 10

"S" No. 106 AM

NE 1/4 NW 1/4 Sec. 10
H.E. No. 848598

"S" No. 109 AM

"S" No. 108 AM

"S" No. 122 AM

"S" No. 111 AM

"S" No. 110 AM2

SW 1/4 NW 1/4 Sec. 10

"S" No. 123 AM

SE 1/4 NW 1/4 Sec. 10

"S" No. 113 AM

"S" No. 112 AM

"S" No. 125 AM

Sec. 9

1/4 Cor. 9|10

SW 1/4 Sec. 10

"S" No. 115 AM

"S" No. 114 AM

"S" No. 127 AM

True Meridian

W.H.B.

Note
Reference will be made to the field notes for the numerous drill holes not shown hereon.

(See Sheet 3)

683-2

Field Notes and Location Notices

7202

(See Sheet 2)

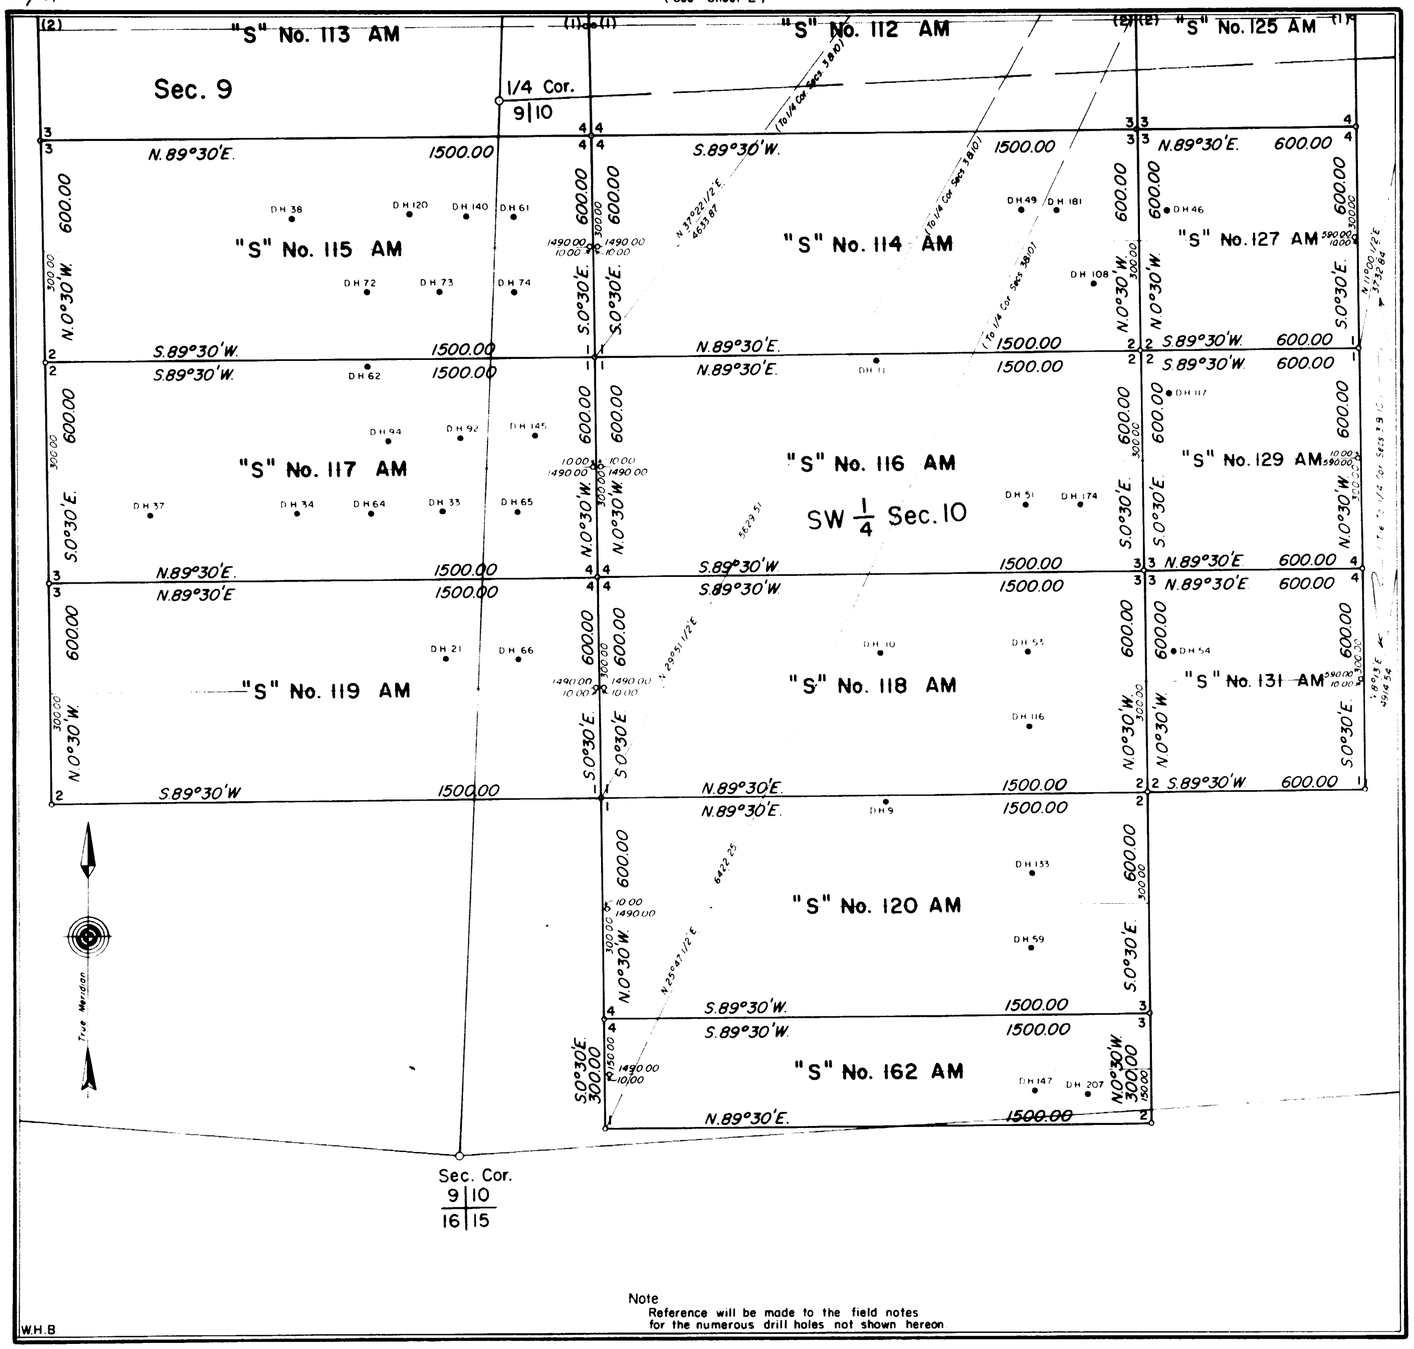

Note
Reference will be made to the field notes for the numerous drill holes not shown hereon

W.H.B

MINERAL SURVEY No. 683 WYOMING

CLAIM OF
THE CLEVELAND – CLIFFS IRON COMPANY

KNOWN AS THE
"S" Nos. 62, 64, 66, 68, 95, 97 to 109, 111 to 120, 122, 123, 125, 127, 129, 131 & 162 AM AND 110 AM2 LODES

SITUATE IN
Secs. 3, 4, 9, 10 & 15, T. 44 N., R. 75 W., 6th PM
CAMPBELL COUNTY
Lat. 43° 48 1/2' N., Long. 105° 52' W., at Cor. No. 3, "S" No. 117 AM

0 50 100 200 300 400 500 600
Feet
Magnetic Declination, 14° East

Surveyed, November 17, 1971 to June 9, 1972
By William G. Ladd, Mineral Surveyor

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming *November 20, 1972*

I hereby certify that this plat of Mineral Survey No 683, Wyoming, is strictly conformable to the field notes of said survey which have been examined and approved

Richard L. Oakes
Chief, Branch of Cadastral Surveys

683-3

NW 1/4 Sec. 13

SW 1/4 NE 1/4 Sec. 13

T.44N., R.76W.
T.44N., R.75W.

PUMPKIN 6 AM
Sec. 13

S.89°28'W. 1500.00
N.89°28'E. 1500.00
S.0°32'E. 600.00
N.0°32'W. 600.00
300.00
10.00
1490.00
Disc. Point & Disc. Drill Hole
D.H. 37
D.H. 87
D.H. 38

1/4 Cor. 13 | 18

PUMPKIN 8 AM
PUMPKIN 7 AM
PUMPKIN 10 AM
PUMPKIN 9 AM
PUMPKIN 12 AM
PUMPKIN 11 AM
D.H. 84
D.H. 83
D.H. 82
D.H. 30
D.H. 80
D.H. 24
D.H. 81
D.H. 21
D.H. 71
D.H. 25
D.H. 72
D.H. 20
D.H. 70
D.H. 69
D.H. 68
D.H. 67
D.H. 66
D.H. 140
D.H. 62
D.H. 36

SW 1/4 Sec. 13

SE 1/4 Sec. 13

SW 1/4 Sec. 18

True Meridian

(To Cor. Secs. 13, 18, 19 & 24)
S. 40°17'E. 2345.52
S. 27°04 1/2'E. 3356.98

See Detail "A" Sheet 3

"B" No. 763 AM

B 1779 AM
B 1781 AM
W.H.B.

NOTE:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

(See Sheet 4)
(See Sheet 3)
(See Sheet 4)(See Sheet 3)

681 – 1

SW 1/4 Sec. 18

(See Sheet 3)

"B" No. 763 AM

"B" No. 764 AM

"B" No. 761 AM

"B" No. 762 AM

"B" No. 743 AM

"B" No. 744 AM

"B" No. 746 AM

"B" No. 740 AM

"B" No. 741 AM

N.88°09'W. 1500.00

S.88°09'E. 1500.00

S.1°51'W. 600.00

N.1°51'E. 600.00

Disc. Point & Disc. Drill Hole

D.H.29

D.H.11-18

D.H.12-18

D.H.13-18

D.H.22-18

D.H.23-18

D.H.18-19

D.H.46-19

D.H.17

D.H.19

D.H.20

D.H.22

D.H.53

D.H.13

D.H.24

D.H.25

D.H.14

D.H.39

D.H.15

S.67°05 1/2'W. 1431.11 (To Cor. Secs 13,18,19 & 24)

N.63°20 1/2'W. 1431.62 (To Cor. Secs. 13,18,19 & 24)

N.80°12'W. 4341.29

1/4 Cor. 18/19

E-1/16 Cor. 18/19

NW 1/4 Sec. 19

SW 1/4 NE 1/4 Sec. 19
H.E. No. 897082

NW 1/4 NE 1/4 Sec. 19
"B" No. 741 AM
H.E. No. 897082

NE 1/4 NE 1/4 Sec. 19
H.E. No. 897082

True Meridian

NOTE:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

W.H.B.

681-2

(See Sheet 4)(See Sheet 1)

PUMPKIN 10 AM — PUMPKIN 9 AM

SE 1/4 Sec. 13

SW 1/4 Sec. 18

PUMPKIN 12 AM — PUMPKIN 11 AM

"B" No. 763 AM — "B" No. 764 AM

PUMPKIN 14 AM — PUMPKIN 13 AM

"B" No. 761 AM — "B" No. 762 AM

PUMPKIN 16 AM — PUMPKIN 15 AM

"B" No. 743 AM — "B" No. 744 AM

PUMPKIN 18 AM — PUMPKIN 17 AM

"B" No. 746 AM

PUMPKIN 20 AM

NE 1/4 Sec. 24

NW 1/4 Sec. 19

Sec. Cor. 13 | 18 / 24 | 19

See Detail "A"

See Detail "B"

See Detail "C"

See Detail "D"

S.89°28'W. 1500.00

S.88°09'E. 1350.00

N.89°28'E. 1500.00

N.88°09'W. 1350.00

S.0°32'E. 600.00

N.0°32'W. 600.00

N.1°51'E. 600.00

S.1°51'W. 600.00

S.68°37 1/2'E. 1616.64

N.67°46 1/2'E. 1614.19

S.67°05 1/2'W. 1431.11

N.63°20 1/2'W. 1431.62

Disc. Point & Disc. Drill Hole

D.H.136 D.H.2 D.H.91 D.H.5 D.H.111c D.H.12 D.H.123 D.H.118 D.H.14 D.H.135 D.H.96 D.H.18 D.H.122 D.H.98 D.H.97 D.H.117 D.H.7 D.H.113 D.H.110 D.H.32 D.H.31 D.H.52 D.H.8-18 D.H.9-18 D.H.10-18 D.H.35-18 D.H.15-18 D.H.17-18 D.H.18-18 D.H.19-18 D.H.2

True Meridian

T.44N., R.76W. — T.44N., R.75W.

NOTE:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

DETAIL "A"
(NOT TO SCALE)

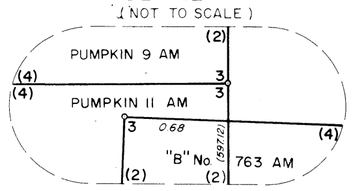

DETAIL "B"
(NOT TO SCALE)

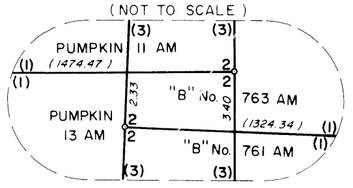

DETAIL "C"
(NOT TO SCALE)

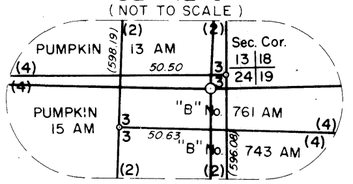

DETAIL "D"
(NOT TO SCALE)

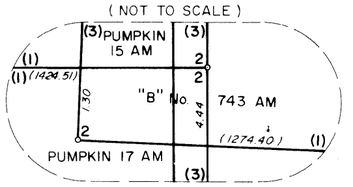

W.H.B.

(See Sheet 4)

(See Sheet 2)

681-3

NOTE:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

Sec. 14

Sec. 23

True Meridian

SW 1/4 Sec. 13

NW 1/4 Sec. 24

SE 1/4 Sec. 13

NE 1/4 Sec. 24

Sec. Cor. 14 | 13 / 23 | 24

1/4 Cor. 13/24

B 1777 AM

B 1779 AM

B 1781 AM

B 1776 AM

B 1778 AM

"B" 1780 AM

"B" 1782 AM

"B" No. 941 AM

"B" No. 943 AM

"B" No. 945 AM

"B" No. 947 AM

PUMPKIN 10 AM

PUMPKIN 9 AM

PUMPKIN 12 AM

PUMPKIN 11 AM

PUMPKIN 14 AM

PUMPKIN 13 AM

PUMPKIN 16 AM

PUMPKIN 15 AM

PUMPKIN 18 AM

PUMPKIN 17 AM

PUMPKIN 20 AM

PUMPKIN 22 AM

D.H.55 D.H.54 D.H.53 D.H.128 D.H.52 D.H.31 D.H.146 D.H.145 D.H.3 D.H.35 D.H.152 D.H.4 D.H.46 D.H.39 D.H.44 D.H.266 D.H.260 D.H.250 D.H.219 D.H.210 D.H.226 D.H.230 D.H.258 D.H.73 D.H.69 D.H.195 D.H.12 D.H.11 D.H.15 D.H.259 D.H.74 D.H.273 D.H.267 D.H.243 D.H.72 D.H.34 D.H.130 D.H.125 D.H.142 D.H.75 D.H.65 D.H.68 D.H.33 D.H.27 D.H.18 D.H.16

Disc. Point & Disc. Drill Hole

S.68°37 1/2'E. 1616.64 (To Cor. Secs. 13,18,19&24)

N.85°14 1/2'E. 4759.72 (To Cor. Secs. 13,18,19&24) 3564.86 N.83°42'E.

N.67°46 1/2'E. 1614.19 (To Cor. Secs. 13,18,19&24)

N.39°13 1/2'E. 2340.44 (To Cor. Secs. 13,18,19&24)

(See Sheet 3)

(See Sheet 5)

W.H.B.

681-4

(See Sheet 4)

Sec. 23

1/4 Cor. 23|24

True Meridian

"B" No. 940 AM

"B" No. 941 AM

"B" No. 942 AM

"B" No. 943 AM

"B" No. 944 AM

"B" No. 945 AM

"B" No. 946 AM

"B" No. 947 AM

"B" No. 903 AM

"B" No. 905 AM

"B" No. 907 AM

B 1776 AM

B 1778 AM

"B" 1780 AM

"B" 1782 AM

"B" No. 946-A AM

"B" No. 907-A AM

NW 1/4 Sec. 24

SW 1/4 Sec. 24

Sec. 24

NE 1/4 Sec. 24

NW 1/4 SE 1/4 Sec. 24

SW 1/4 SE 1/4 Sec. 24

H.E. No. 826781

PUMPKIN 20 AM

PUMPKIN 22 AM

PUMPKIN 24 AM

PUMPKIN 26 AM

PUMPKIN 28 AM

S.89°50'W. 600.00

N.89°50'E. 600.00

S.0°10'E. 1500.00

N.0°10'W. 1500.00

S.89°28'W. 1500.00

N.89°28'E. 1500.00

S.0°32'E. 600.00

N.0°32'W. 600.00

S.0°32'E. 1482.00

N.0°32'W. 1482.00

S.89°28'W. 957

N.89°50'E. 306.00

S.89°50'W. 306.00

Disc. Point & Disc. Drill Hole

(To Cor. Secs. 13, 18, 19 & 24)

See Detail "E"

DETAIL "E"
(NOT TO SCALE)

NOTE:
Reference will be made to the field notes for the numerous drill holes not shown hereon.

W.H.B.

(See Sheet 6)

681-5

Field Notes and Location Notices

(See Sheet 5)

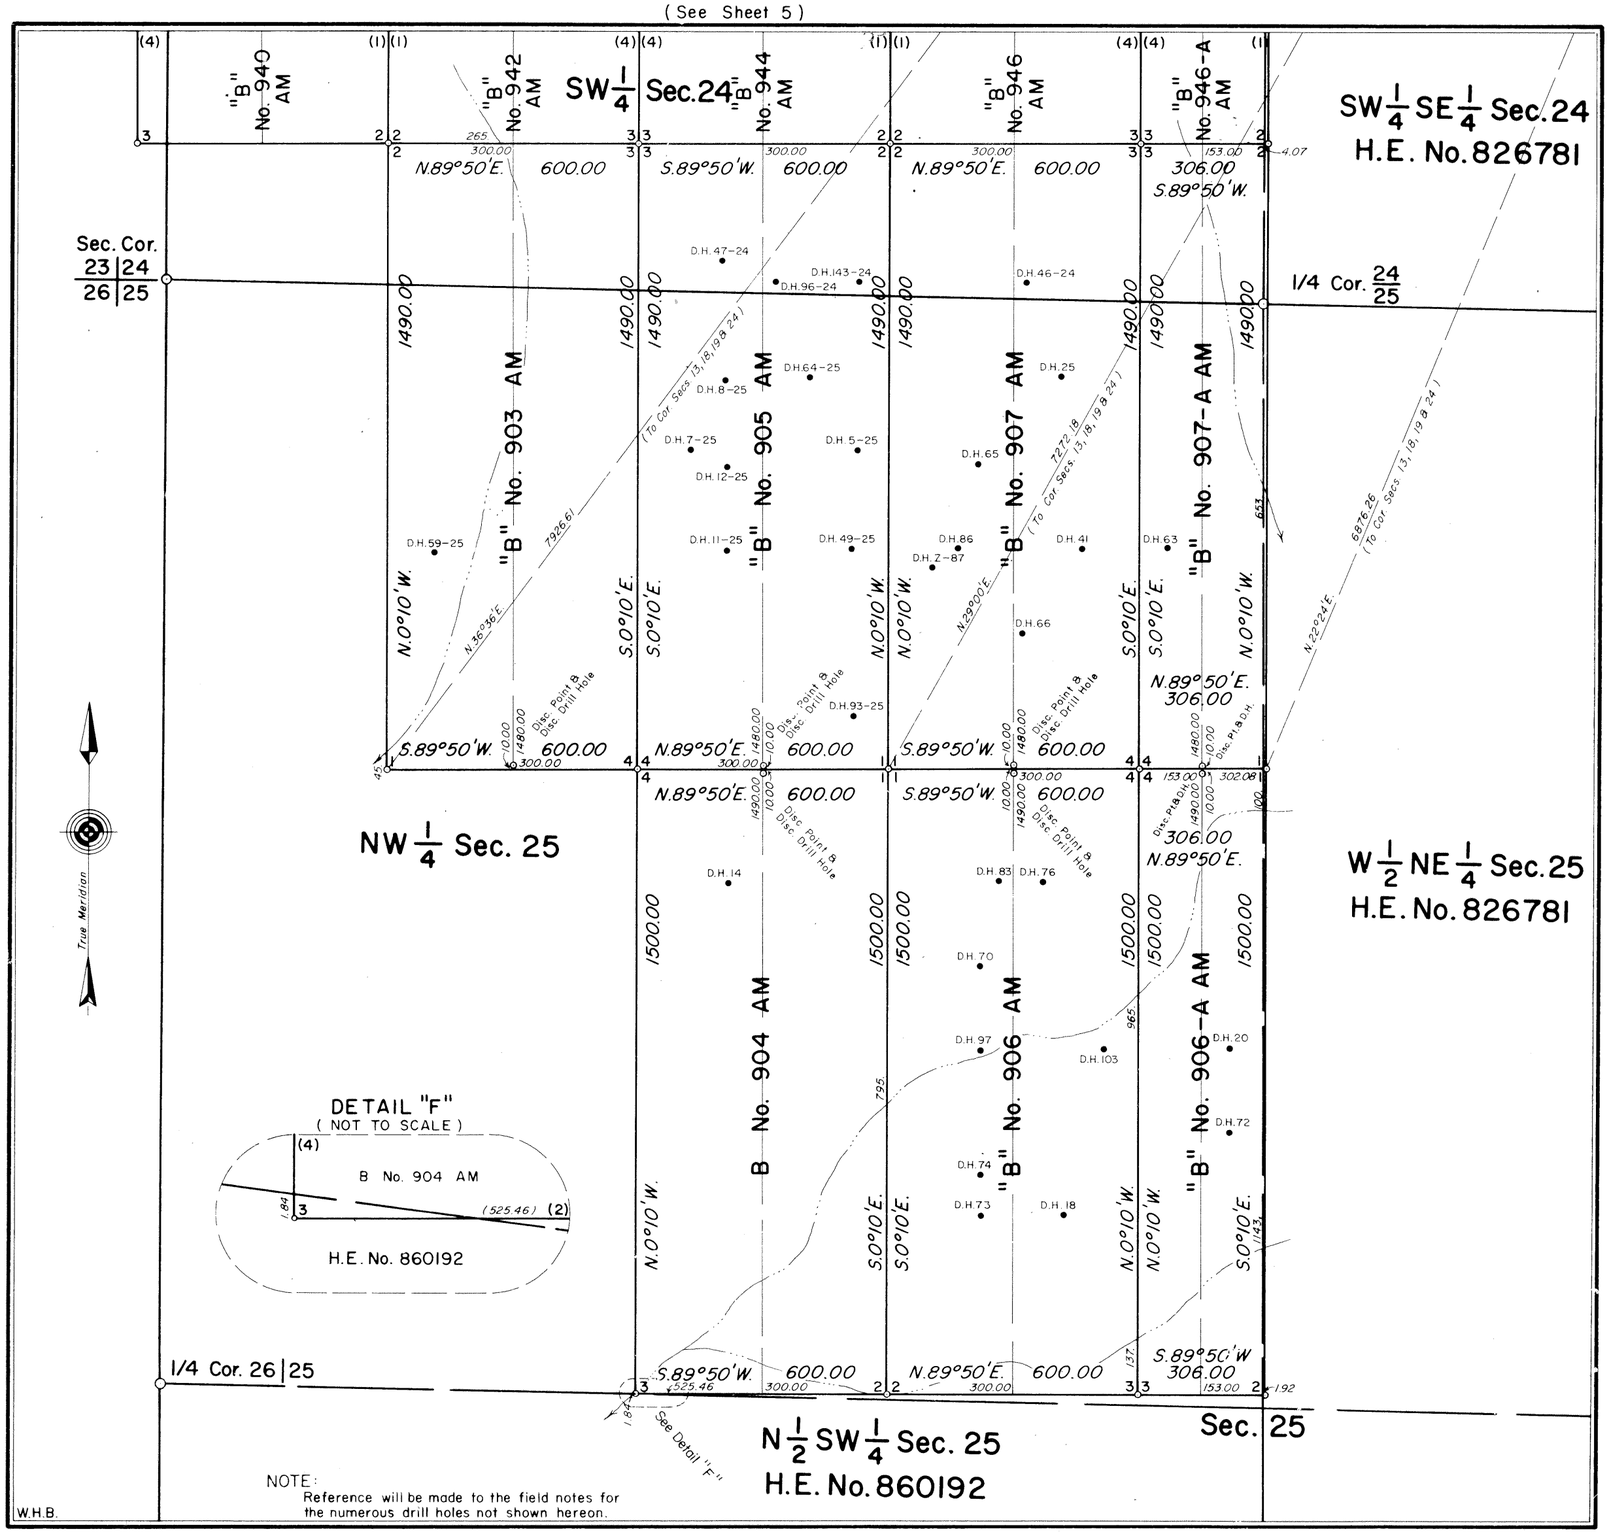

MINERAL SURVEY NO. 681 WYOMING

CLAIM OF

THE CLEVELAND – CLIFFS IRON COMPANY

KNOWN AS THE

"B" Nos. 740, 741, 743, 744, 746, 761, 762 to 764, 903, 905 to 907, 940 to 947, 906-A, 907-A & 946-A AM, B No. 904 AM B 1776 to 1779 & 1781 AM, "B" 1780 & 1782 AM AND PUMPKIN 6 to 18, 20, 22, 24, 26 & 28 AM LODES

(NOTE: The name of each lode is suffixed by AM.)

SITUATE IN

Secs. 18 & 19, T. 44 N., R. 75 W., 6th P.M.
Secs. 13, 23, 24 & 25, T. 44 N., R. 76 W., 6th P.M.
Campbell County
Lat. 43° 46' 30" N., Long. 105° 56' W.,
at Cor. No. 4, Pumpkin 24 AM

0 50 100 200 300 400 500 600
Feet

Magnetic Declination, 14° 30' East.

Surveyed, September 13 to November 29, 1971
By William G. Ladd, Mineral Surveyor

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming *September 24, 1973*

I hereby certify that this plat of Mineral Survey No. 681, Wyoming, is strictly conformable to the field notes of said survey which have been examined and approved.

Richard G. Oakes

Chief, Branch of Cadastral Surveys