

TOWNSHIP 20 NORTH, RANGE 85 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, Township 20 North, Range 85 West, Sixth Principal Meridian, Wyoming.



William B. Yerby surveyed the subdivisional lines in 1876. Joseph V. Beck dependently resurveyed the subdivisional lines in 1956.

The survey was executed with Trimble Model 5800 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM No. 2001-186, "Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods" dated July 26, 2001. The directions of all lines are referenced to the true meridian. The directions, distances, and geographic positions were determined by GPS observations. GPS control network and supporting data are contained in the official group file.

I, Sonja S. Sparks, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions dated March 30, 2007, and Assignment Instructions dated March 30, 2007, for Group Number 766, Wyoming, I have dependently resurveyed a portion of the subdivisional lines, Township 20 North, Range 85 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Field assistant was Jessica R. Toole, Survey Aid. Survey executed April 18, 2007, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in specific manner described hereon.

Sonja S. Sparks
 Sonja S. Sparks
 Cadastral Surveyor

January 30, 2008
 Date

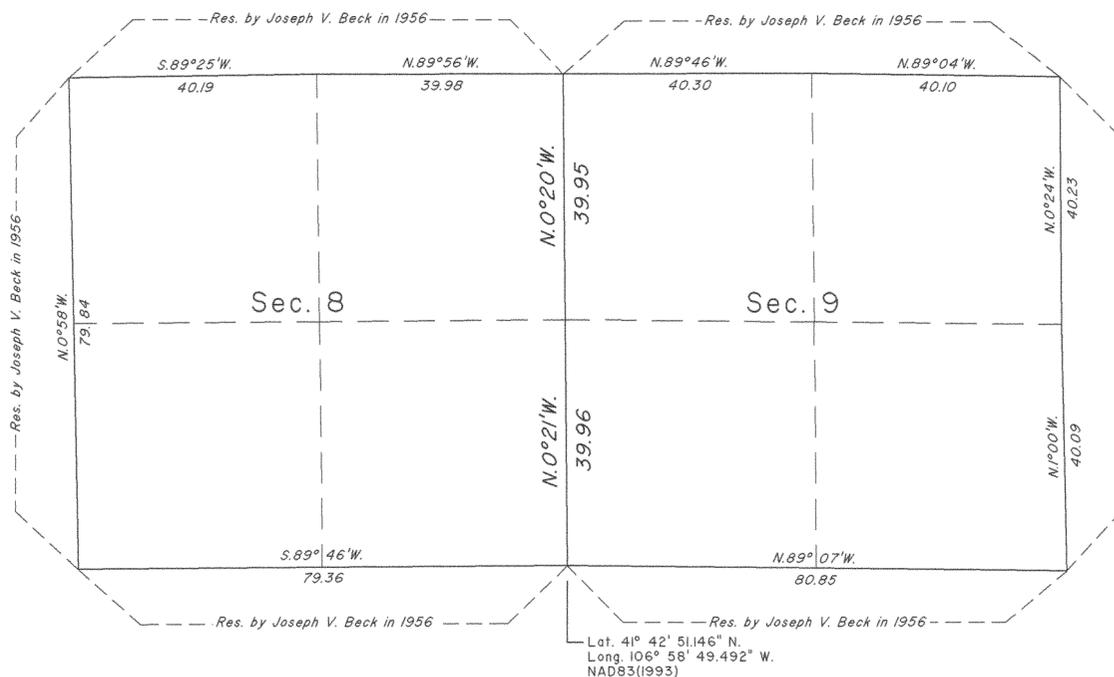

The cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.

T20N R85W	
S 8	S 9
S 17	S 16
1956	

Set a steel fence post alongside the iron post.

Cor. is located 28 lks. W. of a fence, extending N. and S.

The 1/4 sec. cor. of secs. 8 and 9, monumented with an iron post, 2 1/2 ins. diam., 30 ins. long, firmly set 26 ins. in the ground, with brass cap broken off and not recovered.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, atop a plastic encased magnetic marker, with brass cap mkd.

T20N R85W	
1/4	
S 8	S 9
2007	

Set a steel fence post alongside the stainless steel post.

Cor. is located 17 lks. W. of a fence, extending N. and S.

The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a scattered mound of stone to W., with brass cap mkd.

T20N R85W	
S 5	S 4
S 8	S 9
1956	

Set a steel fence post alongside the iron post and rebuild the mound of stone, 3 ft. base, 2 ft. high.

Cor. is located 12 lks. W. of a fence, extending N. and S.

UNITED STATES DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming January 30, 2008

This plat representing the entire record of this survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee
 John P. Lee
 Chief Cadastral Surveyor for Wyoming

