

TOWNSHIP 27 NORTH, RANGE 102 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

SURVEY INFORMATION AND CERTIFICATE

CORNER DESCRIPTIONS

The 1/4 sec. cor. of secs. 21 and 28, monumented with a granite stone, 14 x 8 x 7 ins., loosely set, projecting 8 ins. above ground, very dimly mkd. 1/4 on the N. face, with an inverted iron post (flanged), 2 ins. diam., projecting 36 ins. above ground, alongside (south side).

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic coated magnet, with brass cap mkd.

T27N R102W
S 21
1/4
S 28
2007

Bury the mkd. stone and retain inverted iron post alongside the stainless steel post.

Cor. is located in sparsely vegetated sand dunes.

Point selected for a witness point, on line between secs. 21 and 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic coated magnet, in an embedded collar of stone, with brass cap mkd.

WP
T27N R102W
S 21
S 28
2007

Cor. is located atop a low ridge, bears irregularly ENE. and WSW.

The cor. of secs. 20, 21, 28 and 29, monumented with a granite stone, 17 x 14 x 7 ins., firmly set, projecting 7 ins. above ground, plainly mkd. with 4 grooves on the E. face and 2 grooves on the S. face.


At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic coated magnet, with brass cap mkd.


T27N R102W
S 20 | S 21
S 29 | S 28
2007

Bury the mkd. stone alongside the stainless steel post and set a steel fence post nearby.


Cor. is located 2 lks. S. of a fence corner (wooden), 4 strand barbed wire fences extend N. 70° E. and W.

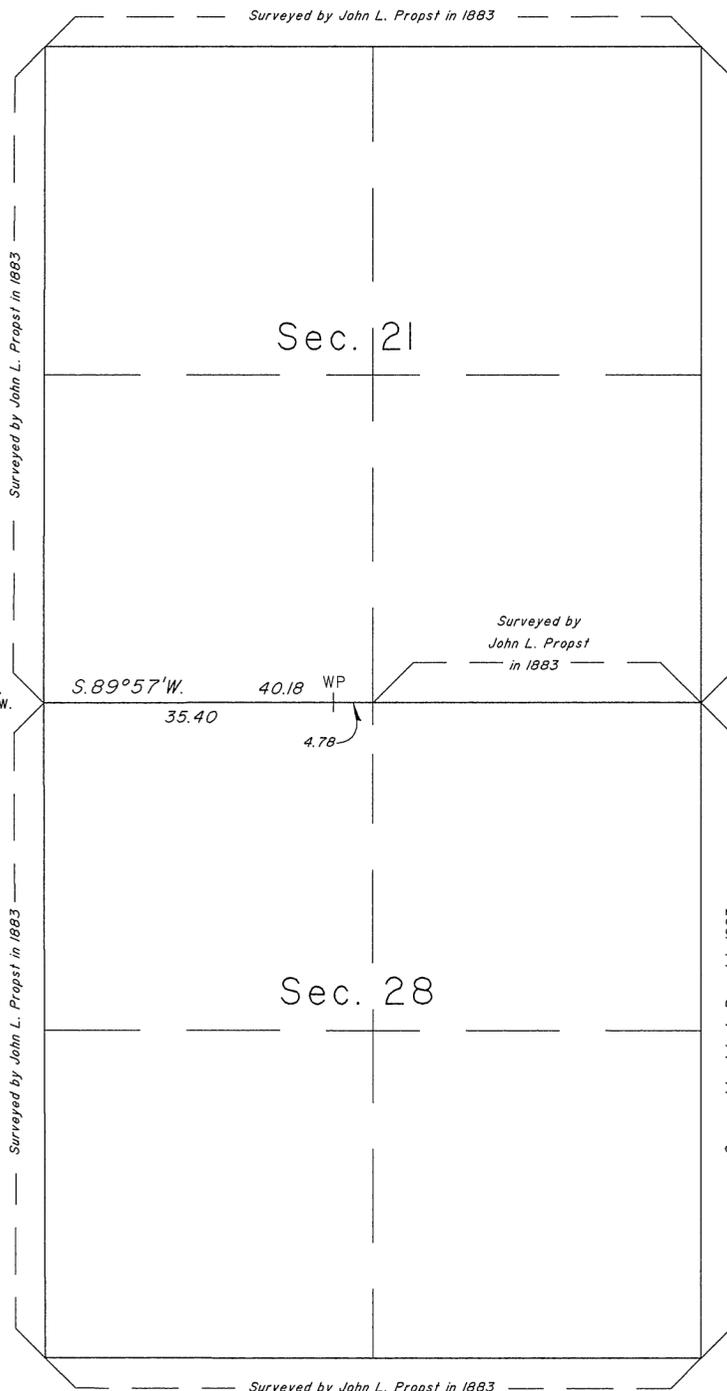

Lat. 42°17'33.544" N.
Long. 109°00'16.576" W.
NAD 83 (COR996)



Mean
Magnetic
Declination
11 3/4° E.



Scale in Chains

This plat represents the entire record of the dependent resurvey of a portion of the subdivisional lines, designed to restore the corners in their true original locations according to the best available evidence, Township 27 North, Range 102 West, Sixth Principal Meridian, Wyoming.

John L. Propst surveyed the subdivisional lines in 1883.

Lottings and areas are as shown on the plat approved February 8, 1884.

The survey was executed with Trimble Model 5800 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM No. 2001-186, "Standard Guidelines for Cadastral Surveys Using Global Positioning System Methods" dated July 26, 2001. The directions of all lines are referenced to the true meridian. The directions, distances, and geographic positions were determined by GPS observations. GPS control and supporting data are contained in the official group file.

I, Olian T. Shockley, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions dated May 21, 2007, and Assignment Instructions dated May 21, 2007, for Group Number 771, Wyoming, I have dependently resurveyed a portion of the subdivisional lines, Township 27 North, Range 102 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Survey commenced September 20, 2007, and completed September 25, 2007, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in specific manner described hereon.

Olian T. Shockley
Olian T. Shockley,
Cadastral Surveyor

November 17, 2008
Date

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming November 17, 2008

This plat representing the entire record of this survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee
John P. Lee

Chief Cadastral Surveyor for Wyoming