


TOWNSHIP 47 NORTH, RANGE 78 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

CORRECTIVE DEPENDENT RESURVEY

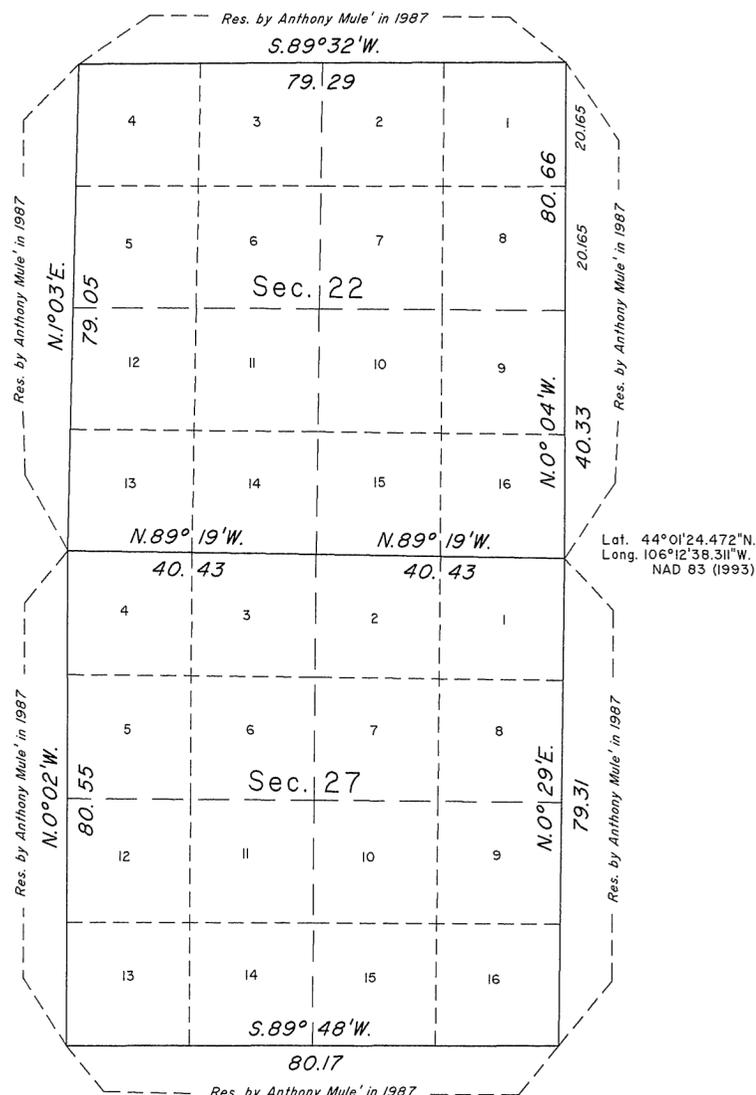

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the corrective dependent resurvey of a portion of the subdivisional lines designed to restore the corners to their original locations according to the best available evidence, Township 47 North, Range 78 West, Sixth Principal Meridian, Wyoming.

Charles McCarthy and Joseph R. Moore surveyed the exterior boundaries in 1881. William O. Downey and Mortimer N. Grant retraced the exterior boundaries and surveyed the subdivisional lines in 1881. Russell C. MacDonald dependently resurveyed the east boundary and portions of the south and north boundaries and subdivisional lines in 1946. Anthony Mule' dependently resurveyed portions of the south, west and north boundaries and subdivisional lines in 1987.

Stanton J. Abell, Wyoming Professional Engineer and Land Surveyor, Registration No. 2877, purported finding the monument for the 1/4 section cor. of secs. 22 and 27, set during the 1987 dependent resurvey, to be erroneously located 129 ft. South and 71 ft. East of the record position. A field investigation confirmed the purported findings. This corrective dependent resurvey as shown hereon corrects the the 1987 dependent resurvey.

Lottings and areas are as shown on the plat approved December 4, 1990.

The survey was executed with TRIMBLE Model 5800 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM No. 2001-187, "Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods" dated July 26, 2001. The geographic position was determined by Global Positioning methods.

The area embraced by this survey is situated in the east central portion of Johnson County, approximately 30 miles southeast of Buffalo, Wyoming.

I Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY, upon honor, that in pursuance of Special Instructions dated May 23, 2007, and Assignment Instructions dated May 23, 2007, for Group Number 773, Wyoming, I have corrected a portion of the dependent resurvey of a portion of the subdivisional lines, Township 47 North, Range 78 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Survey executed May 24, 2007, and has been made in strict conformity with the Special Instructions, the Manual of Surveying Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described hereon.

Signature of Joel T. Ebner, Cadastral Surveyor

November 17, 2008 Date

The cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with a steel fence post alongside, with brass cap mkd.

T47N R78W
S 22 | S 23
S 27 | S 26
1987

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T47N R78W
S 22
1/4
S 27
2007

The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with a steel fence post alongside, with brass cap mkd.

T47N R78W
S 21 | S 22
S 28 | S 27
1987

The 1/4 sec. cor. of secs. 22 and 27, reestablished by Stanton J. Abell, Wyoming Professional Engineer and Land Surveyor, Registration No. 2877, monumented with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set projecting 5 ins. above the ground, with aluminum cap mkd. ABELL T47N R78W 1/4 S22 S27 2007 PE&LS 2877. This position is accepted as a careful and faithful reestablishment of the original cor. position.

At the corner point

Deposit the steel reinforcement rod inside and set a steel fence post alongside the stainless steel post.

From this point, the erroneous position of the 1/4 sec. cor of secs. 22 and 27, reestablished during the 1987 dependent resurvey, bears S. 28° 46' E., 2.42 chs. dist.; monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T47N R78W 1/4 S22 S27 1987. Add the mks. AM 2007 on the brass cap and bury the iron post 6 ins. below the surface of the ground.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming November 17, 2008

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Signature of John P. Lee, Chief Cadastral Surveyor for Wyoming

John P. Lee
Chief Cadastral Surveyor for Wyoming

