


TOWNSHIP 12 NORTH, RANGE 68 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, COLORADO.
LOCATION AND REMONUMENTATION OF CERTAIN CORNERS

TOWNSHIP INDEX DIAGRAM
(Diagram based upon the current BLM Geographic Coordinate Data Base)

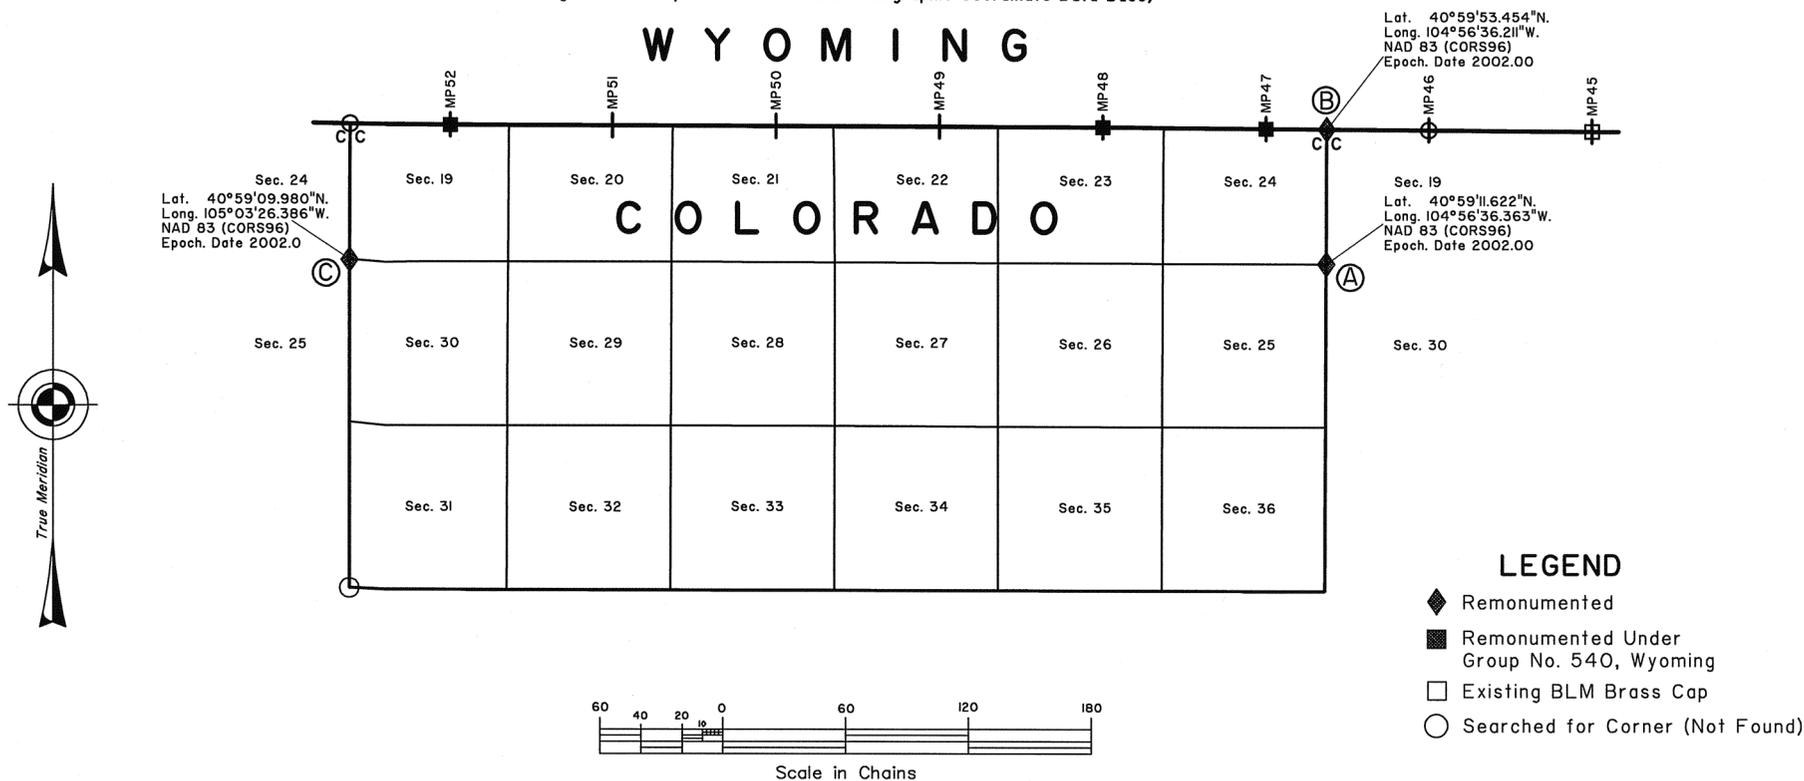

This plat represents the entire record of the location and remonumentation of certain corners, Township 12 North, Range 68 West, Sixth Principal Meridian, Colorado.

The remonumentation of certain corner points established by A. V. Richards and A.M. Fahringer, Cadastral Surveyors, in 1873-74, was made at the request of the Geographic Coordinate Data Base Program Manager, Washington Office, Bureau of Land Management.
(BPA: NAB-000008 Task Order No.-NAD-000095)

The geographic coordinates, in NAD 83 (CORS 96), epoch date 2002.00, for the corners as shown, were determined by GPS observations to a Network Accuracy of less than 0.20 meters, 95 per cent confidence circle, as defined in Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods, May 9, 2001, Version 1.0.

Location and remonumentation executed by Darryl A. Wilson, Colorado Registered Professional Land Surveyor #23059, under the direction of Paul Lukacovic, Cadastral Surveyor, beginning October 04, 2004, and completed October 10, 2004, pursuant to Special Instructions dated July 16, 1982, and Assignment Instructions dated July 14, 2004 for Group No. 750, Colorado.

LEGEND

- ◆ Remonumented
- Remonumented Under Group No. 540, Wyoming
- Existing BLM Brass Cap
- Searched for Corner (Not Found)

HISTORY

The Third Standard Parallel North, (North Boundary) through Range 69 West, was surveyed by F. Case in 1867. The east, west and south boundaries of the township were surveyed by W.M. Ashley in 1867. The subdivisional lines of the township were surveyed by E.D. Bright in 1868. The south boundary of Wyoming (Colorado-Wyoming State Boundary) through this township, was surveyed by A.V. Richards in 1873. In 1874, A.M. Fahringer surveyed from south to north, and monumented the closing corners against the state boundary through this township.

CORNER DESCRIPTIONS

(A) The cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with a granite stone, 15 x 13 x 11, with two notches chiseled on the south face. Stone is loosely set on top of concrete base of deflection point in an east-west fence line, and on the projection of string of steel fence posts to the south. Not remonumented.

(B) The closing corner of T. 12 N., Rgs. 67 and 68 W., on the E. Bdy. of the Tp., monumented with a granite stone, 17 x 10 x 7, lying on it's side in an embedded mound of stone, plainly mkd. with 6 notches on one face, 6 notches on opposite face, and CC on third face.

At the corner point
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam. 24 ins. in the ground, with brass cap mkd.

WYO
T12N
R68W R67W
S24 S19
S24 C S19
COLO
2004

Rebuild mound of stone to a triangular shaped collar of stone with 4 foot sides, 4 ins. high around the monument. Deposit the mkd. stone flush with the ground on N. side of monument.

From which
A rebar, 1/2 in. diam., proj. 7 ins. above ground, bears N. 35° E., 38 lks. dist.
A rebar, 1/2 in. diam., proj. 8 ins. above ground, bears S. 64° E., 38.5 lks. dist. Cor. falls on a gentle ridge that bears NW-SE.

(C) The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with a granite stone, 12 x 11 x 10 ins., firmly set projecting 8 ins. above the ground, mkd. with 2 notches on S. face. Monument is located at the corner of fences to the north, south and east.

At the corner point
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam. 26 ins. in the ground, with brass cap mkd.

T12N
S24 S19
R69W S25 S30 R68W
2004

Bury the original mkd. stone on N. side of the monument.

CERTIFICATE

I, Darryl A. Wilson, Colorado Registered Professional Land Surveyor # 23059, HEREBY CERTIFY upon honor, that I have located and remonumented certain corners which are represented on this plat, and that said remonumentation has been made in strict conformity with said Special Instructions, and the Manual of Surveying Instructions, 1973.

Darryl A. Wilson
Surveyor

8-31-05
Date

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Denver, Colorado September 1, 2005

The remonumentation represented by this plat, having been correctly executed in accordance with the requirements of the law and the regulations of this Bureau, is hereby accepted.

For the Director

Randall M. Zuercher
Chief Cadastral Surveyor for Colorado