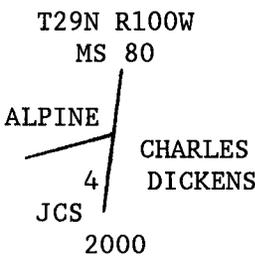


Dependent Resurvey, Portion of Mineral Survey No. 80,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Bury the original cor. stone and the steel reinforcement rod alongside the stainless steel post. Re-build the mound of stone, 4 ft. base, 2 ft. high, NE. of the cor.</p>
	<p>From this point, Cor. No. 1, M.S. No. 80, J.C.S. Lode, bears S. 8° 04' W., 2.967 chs. dist.</p>
	<p>N. 8° 33' E., on line 4-1, M.S. No. 80, Charles Dickens Lode, identical in part with line 4-1, M.S. No. 80, J.C.S. Lode.</p>
4.25	<p>Cor. No. 4, M.S. No. 80, J.C.S. Lode, at intersection with line 2-3, M.S. No. 80, Alpine Lode, monumented with a hornblende stone, 24x12x4 ins., firmly set 12 ins. in the ground, plainly mkd. 4/80 on W. face, with a mound of stone, 3 ft. base, 2 ft. high, SW. of the cor.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	
	<p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p>
	<p>N. 7° 49' E., beginning new measurement.</p>
	<p>Over rolling terrain.</p>
0.399	<p>Intersect the E. and W. center line of sec. 20, at a point from which the center 1/4 sec. cor. of sec. 20, bears S. 89° 29' W., 1.53 chs. dist., hereinafter decribed.</p>
14.637	<p>Intersect line 1-2, M.S. No. 80, Ben Hur Lode, at a point from which Cor. No. 1 bears N. 15° 38' W., 4.537 chs. dist.</p>
15.338	<p>Cor. No. 1, M.S. No. 80, Charles Dickens Lode.</p>

Dependent Resurvey, Portion of Mineral Survey No. 89,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS

(Restoring the survey executed by
Newton H. Brown in 1899)

From Cor. No. 4, M.S. No. 89, Mono No. 2 Lode, monumented with a mound of stone, 3 ft. base, 1 ft. high, no mkd. stone found, from which original bearing objects

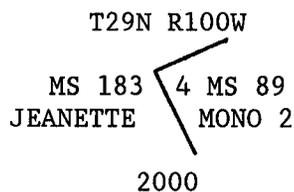
A rock outcrop, 6 ins. above ground, bears S. $\frac{3}{4}$ ° E.,
101.0 ft. dist., mkd. X BR. (Record: S. 0° 05' E.,
104.5 ft. dist.)

A rock outcrop, 12 ins. above ground, bears N. 42°
W., 33.0 ft. dist., mkd. X BR 4 89. (Record: N. 46°
50' W., 33 ft. dist.)

This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base, to top, with brass cap mkd.




N. 65° 44' E., on line 4-1, M.S. No. 89, Mono No. 2 Lode.

Over rolling terrain.

- 1.228 Intersect line 1-4, M.S. No. 183, Jeanette Lode, at a point from which Cor. No. 1 bears N. 74° 15' E., 1.597 chs. dist., hereinafter described.

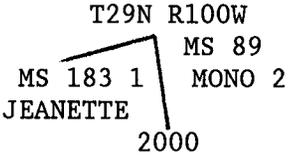
At the point of intersection, set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Dependent Resurvey, Portion of Mineral Survey No. 89,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a steel fence post alongside the stainless steel post.</p> <p>7.449 Cor. No. 1, M.S. No. 89, Mono No. 2 Lode, identical with Cor. No. 2, M.S. No. 40, Mono Lode, and Cor. No. 3, M.S. No. 509, Oro Fino Lode, monumented with a schist stone, 28x12x4 ins., firmly set 10 ins. in the ground, plainly mkd. 1/89 on NE. face and 2/40 on SE. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">Dependent Resurvey, Portion of Mineral Survey No. 183, T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by Od H. Midthun in 1902)</p> <hr/> <p>From Cor. No. 4, M.S. No. 183, Jeanette Lode, monumented with a schist stone, 22x11x7 ins., firmly set 10 ins. in the ground, plainly mkd. 4 183 on SE. face, with a mound of stone, 3 ft. base, 1 ft. high, SE. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> </div>
--------	--

Dependent Resurvey, Portion of Mineral Survey No. 183,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Bury the original cor. stone and set a steel fence post alongside the stainless steel post.
	N. 74° 15' E., on line 4-1, M.S. No. 183, Jeanette Lode.
	Over rolling terrain.
4.949	Intersect line 2-3, M.S. No. 80, Charles Dickens Lode, at a point from which Cor. No. 2 bears N. 8° 11' E., 64.3 lks. dist.
21.009	Intersect line 4-1, M.S. No. 89, Mono No. 2 Lode, at a point from which Cor. No. 4 bears S. 65° 44' W., 1.228 chs. dist.
22.606	Cor. No. 1, M.S. No. 183, Jeanette Lode, monumented with a schist stone, 20x11x5 ins., loosely set 6 ins. in the ground, in a collar of stone, plainly mkd. 1 183 on E. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	
	Bury the original cor. stone and set a steel fence post alongside the stainless steel post.
	<p>Dependent Resurvey, Portion of Mineral Survey No. 509, T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming</p>
	<p>(Restoring the survey executed by Guy W. Higby in 1918)</p>
	<p>From Cor. No. 3, M.S. No. 509, Oro Fino Lode, identical with Cor. No. 2, M.S. No. 40, Mono Lode, and identical with Cor. No. 1, M.S. No. 89, Mono Lode No. 2 Lode.</p>
	N. 24° 04' W., on line 3-4, M.S. No. 509, Oro Fino Lode.
	Over gently rolling terrain.

Dependent Resurvey, Portion of Mineral Survey No. 509,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
9.081	<p>Cor. No. 4, M.S. No. 509, Oro Fino Lode, monumented with a schist stone, 30x14x6 ins., firmly set 18 ins. in the ground, in a mound of stone, 3 ft. base, 1 ft. high, plainly mkd. 4 OF 509 on SE. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div data-bbox="841 619 1040 804" style="text-align: center;"> <p>T29N R100W S 20 4 OF MS 509 2000</p> </div> <p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, SE. of the cor.</p> <hr/> <p>N. 65° 56' E., on line 4-1, M.S. No. 509, Oro Fino Lode.</p> <p>Over gently rolling terrain.</p>
10.628	<p>Intersect the line bet. secs. 20 and 21, at a point from which the cor. of secs. 16, 17, 20 and 21, bears N. 1° 06' W., 7.81 chs. dist.</p>
12.30	<p>South Pass City Road, bears SSE. and NNW.</p>
22.703	<p>Cor. No. 1, M.S. No. 509, Oro Fino Lode, monumented with a schist stone, 23x12x3 ins., firmly set 14 ins. in the ground, in a collar of stone, plainly mkd. 1 OF 509 on SW. face and X on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div data-bbox="808 1604 1003 1825" style="text-align: center;"> <p>T29N R100W S 21 1 OF MS 509 2000</p> </div>

Dependent Resurvey, Portion of Mineral Survey No. 509,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">Subdivision of Section 20 T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the 1/4 sec. cor. of secs. 20 and 29.</p> <p>N. 0° 56' W., on the N. and S. center line of sec. 20.</p> <p>Over rolling terrain.</p> <p>5.70 U.S. Steel Railroad grade (abandoned), bears SE. and NW.</p> <p>16.32 Point for Cor. No. 8, Lot 19, identical with Cor. No. 3, Lot 24, hereinafter described.</p> <p>19.88 Point for the center S. 1/16 sec. cor. of sec. 20, identical with Cor. No. 9, Lot 19, and Cor. No. 2, Lot 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T29N R100W C S1/16 S 20 C 2000</p> <p>from which</p> <p style="text-align: center;">The SE. cor. of the South Pass Trading Co. building, 35x24 ft., bears N. 58° E., 14.74 chs. dist.; long side bears ENE.</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, a lease corner established by the Wyoming Recreation Committee, bears S. 70° 52' W., 11 lks. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. S1/16 WRC, and with a steel fence post alongside, with a metal tag, 3 ins. sq., attached, mkd. WYO REC COM LEASE.</p> <p>26.10 Willow Creek, course NNE.</p>
--------	--



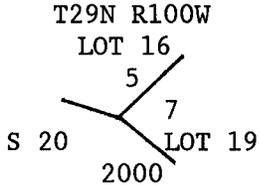
Subdivision of Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
32.15	Point for Cor. No. 1, Lot 19, at intersection with line 1-2, M.S. No. 80, J.C.S. lode, hereinafter described.
39.76	Point the center 1/4 sec. cor. of sec. 20, at intersection with the E. and W. center line. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T29N R100W C1/4 S 20 2000 Raise a mound of stone, 4 ft. base, 2 ft. high, W. of the cor.
52.70	U.S. Steel Railroad grade (abandoned), bears NE. and SW.
57.54	Intersect line 1-4, M.S. No. 80, Ben Hur lode, at a point from which cor. No. 1 bears N. 74° 16' E., 2.638 chs. dist.
79.06	The 1/4 sec. cor. of secs. 17 and 20. <hr/> From the 1/4 sec. cor. of secs. 20 and 21, identical with Cor. No. 1, M.S. No. 331, Carissa Placer and Cor. No. 1, M.S. No. 331, Tract A, Mono Placer. S. 89° 29' W., on the E. and W. center line of sec. 20. Over rolling terrain.
1.50	Wash, drains SSW.
11.80	South Pass City Road, bears NNE. and SSW.
29.58	Intersect line 2-3, M.S. No. 80, Charles Dickens lode, at a point from which Cor. No. 3 bears S. 8° 11' W., 5.998 chs. dist.
38.70	Intersect line 1-4, M.S. No. 80, Charles Dickens lode, at a point from which Cor. No. 1 bears N. 7° 49' E., 14.939 chs. dist.
40.23	The center 1/4 sec. cor. of sec. 20.
55.40	Intersect line 3-4, M.S. No. 80, Alpine lode, identical with line 4-5, Lot 19, at a point from which Cor. No. 4, M.S. No. 80, Alpine lode, identical with Cor. No. 5, Lot 19 bears N. 15° 06' W., 4.251 chs. dist.


Subdivision of Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
60.20	Willow Creek, course SSE.
69.42	Intersect line 7-8, Lot 19, at a point from which Cor. No. 7, Lot 19, bears N. 51° 56' W., 3.373 chs. dist.
73.20	U.S. Steel Railroad grade (abandoned), bears N. and SSE.
80.23	The 1/4 sec. cor. of secs. 19 and 20.
<hr/> <p>Metes and Bounds Survey of Lot 16, Section 20, T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming</p> <hr/>	
	Beginning at Cor. No. 1, Lot 16, identical with Cor. No. 4, M.S. No. 80, Ben Hur Lode.
	S. 77° 14' W., on line 1-2, Lot 16.
	Over rolling terrain.
13.132	Point for Cor. No. 2, Lot 16.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p>T29N R100W S 20 2 LOT 16 2000</p>
	Set a steel fence post alongside the stainless steel post.
	S. 35° 16' W., on line 2-3, Lot 16.
	Over rolling terrain.
0.80	Willow Creek, course E.
2.623	Point for Cor. No. 3, Lot 16.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

Metes and Bounds Survey of Lot 16, Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
	 <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>S. 9° 44' W., on line 3-4, Lot 16. Over rolling terrain.</p> <p>5.139 Point for Cor. No. 4, Lot 16.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>  <p>from which</p> <p>A Pine, 25 ins. diam., bears N. 84° W., 95 lks. dist., mkd. COR 4 L16 S20 BT.</p> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>S. 72° 29' E., on line 4-5, Lot 16. Over rolling terrain.</p> <p>1.10 U.S. Steel Railroad grade (abandoned), bears NNE. and SSW.</p> <p>2.183 Point for Cor. No. 5, Lot 16, identical with Cor. No. 7, Lot 19.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> 

Metes and Bounds Survey of Lot 16, Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the stainless steel post.
	N. 46° 11' E., on line 5-6, Lot 16, identical with line 6-7, Lot 19.
	Over rolling terrain.
6.089	Point for Cor. No. 6, Lot 16, identical with Cor. No. 6, Lot 19.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of concrete, with brass cap mkd.
	<p style="text-align: center;">T29N R100W LOT 16  LOT 19 2000</p>
	from which
	An X BO chiseled on top SE. end of steel culvert, 9 ft. diam., bears N. 41¾° W., 80.0 lks. dist.
	Set a steel fence post alongside the stainless steel post.
	S. 79° 33' E., on line 6-7, Lot 16, identical with line 5-6, Lot 19.
	Over rolling terrain.
0.50	Willow Creek, course ESE.
11.36	Cor. No. 7, Lot 16, identical with Cor. No. 5, Lot 19, and Cor. No. 4, M.S. No. 80, Alpine Lode, and Cor. No. 3, M.S. No. 80, Ben Hur Lode.
	N. 15° 55' W., on line 7-1, Lot 16, identical with line 3-4, M.S. No. 80, Ben Hur Lode.
	Over broken terrain.
4.30	U.S. Steel Railroad grade (abandoned), bears ESE. and WNW.


Metes and Bounds Survey of Lot 16, Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	
8.956	<p>Cor. No. 1, Lot 16, identical with Cor. No. 4, M.S. No. 80, Ben Hur Lode, and the point of beginning; said lot contains 10.27 acres, more or less.</p>
<p>Metes and Bounds Survey of Lot 19, Section 20 T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming</p>	
<p>Beginning at the point for Cor. No. 1, Lot 19, at intersection of the N. and S. center line of sec. 20 with line 1-2, M.S. No. 80, J.C.S. Lode, falls at lease corner established by the Wyoming Recreation Committee, monumented with a steel reinforcement rod, 18 ins. long, 5/8 in. diam., firmly set 12 ins. in the ground, with aluminum cap mkd. JCS WRC.</p>	
<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
<p>Deposit the steel reinforcement rod inside and set a steel fence post alongside the stainless steel post.</p>	
<p>S. 74° 11' W., on line 1-2, Lot 19, identical in part with line 1-2, M.S. No. 80, J.C.S. Lode.</p>	
<p>Over nearly level terrain, through thick willow brush.</p>	
4.00	Willow Creek, course S.
7.274	<p>Cor. No. 2, Lot 19, identical with Cor. No. 2, M.S. No. 80, J.C.S. Lode.</p>
<p>N. 8° 15' E., on line 2-3, Lot 19, identical with line 2-3, M.S. No. 80, J.C.S. Lode.</p>	
<p>Over rolling terrain, through willow brush.</p>	
3.50	Willow Creek, course ESE.

Metes and Bounds Survey of Lot 19, Section 20,
T. 29 N., R. 100 W. Sixth Principal Meridian, Wyoming

CHAINS	
7.179	Cor. No. 3, Lot 19, identical with Cor. No. 3, M.S. No. 80, J.C.S. Lode, at intersection with line 2-3, M.S. No. 80, Alpine Lode.
	<hr/> S. 73° 56' W., on line 3-4, Lot 19, identical in part with line 2-3, M.S. No. 80, Alpine Lode. Over rolling terrain, through willow brush.
6.00	Willow Creek, course SE.
8.397	Cor. No. 4, Lot 19, identical with Cor. No. 3, M.S. No. 80, Alpine Lode.
	<hr/> N. 15° 06' W., on line 4-5, Lot 19, identical with line 3-4, M.S. No. 80, Alpine Lode. Over rolling terrain, through willow brush.
2.00	Willow Creek, course SE.
4.836	Intersect the E. and W. center line of sec. 20, at a point from which the center 1/4 sec. cor. of sec. 20 bears N. 89° 29' E., 15.17 chs. dist.
9.087	Cor. No. 5, Lot 19, identical with Cor. No. 4, M.S. No. 80, Alpine Lode, Cor. No. 3, M.S. No. 80, Ben Hur Lode, and Cor. No. 7, Lot 16.
	<hr/> N. 79° 33' W., on line 5-6, Lot 19, identical with line 6-7, Lot 16. Over rolling terrain.
10.90	Willow Creek, course ESE.
11.36	Cor. No. 6, Lot 19, identical with Cor. No. 6, Lot 16.
	<hr/> S. 46° 11' W., on line 6-7, Lot 19, identical with line 5-6, Lot 16. Over rolling terrain.
6.089	Cor. No. 7, Lot 19, identical with Cor. No. 5, Lot 16.

Metes and Bounds Survey of Lot 19, Section 20,
T. 29 N., R. 100 W. Sixth Principal Meridian, Wyoming

CHAINS	
	<p>S. 51° 56' E., on line 7-8, Lot 19.</p> <p>Over rolling terrain.</p>
3.373	<p>Intersect the E. and W. center line of sec. 20, at a point from which the 1/4 sec. cor. of secs. 19 and 20 bears S. 89° 29' W., 10.81 chs. dist.</p>
25.40	<p>Power line, bears ENE. and WSW.</p>
40.94	<p>Point for Cor. No. 8, Lot 19, identical with Cor. No. 3, Lot 24 at intersection with the N. and S. center line of section 20.</p>
	<p>Set a brass tablet, 3½ ins. diam., 3 in. stem, in drill hole of rock outcrop, with top mkd.</p>
	<div style="text-align: center;"> <p>T29N R100W</p> <p>LOT 19 C</p>  <p>8 LOT 24</p> <p>3</p> <p>S 20 </p> <p>C</p> <p>2000</p> </div>
	<p>Raise a mound of stone, 4 ft. base, 3 ft. high, NE. of the cor.</p>
	<p>N. 0° 56' W., on line 8-9, Lot 19, identical with line 2-3 Lot 24, and identical in part with the N. and S. center line of sec. 20.</p>
	<p>Over rolling terrain.</p>
3.56	<p>Cor. No. 9, Lot 19, identical with the center S. 1/16 sec. cor. of sec. 20, and Cor. No. 2, Lot 24.</p>
	<p>N. 0° 56' W., on line 9-1, Lot 19, identical in part with the N. and S. center line of sec. 20.</p>
	<p>Over rolling terrain.</p>
6.20	<p>Willow Creek, course NNE.</p>
12.27	<p>Cor. No. 1, Lot 19, at intersection of the N. and S. center line of sec. 20 with line 1-2, M.S. No. 80, J.C.S. Lode, and the point of beginning; said lot contains 33.31 acres, more or less.</p>

Metes and Bounds Survey of Lot 24, Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS											
	Beginning at Cor. No. 1, Lot 24, identical with the S. 1/16 sec. cor. of secs. 20 and 21.										
	S. 89° 25' W., on line 1-2, Lot 24, identical with the E. and W. center line of the SE¼ of sec. 20.										
	Over gently rolling terrain, through willow brush.										
17.50	Willow Creek, course SE.										
21.20	South Pass City Road, bears NE. and SW.										
40.15	Cor. No. 2, Lot 24, identical with the center S. 1/16 sec. cor. of sec. 20, and Cor. No. 9, Lot 19.										
	S. 0° 56' E., on line 2-3, Lot 24, identical with line 8-9, Lot 19, and identical in part with the N. and S. center line of sec. 20.										
	Over rolling terrain.										
3.56	Cor. No. 3, Lot 24, identical with Cor. No. 8, Lot 19.										
	N. 89° 25' E., on line 3-4, Lot 24.										
	Over rolling terrain.										
13.40	South Pass City Road, bears NNE. and SSW.										
40.13	Point for Cor. No. 4, Lot 24, at intersection with the line bet. secs. 20 and 21.										
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base, to top, with brass cap mkd.										
	<div style="text-align: center;"> <p>T29N R100W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">LOT 24</td> <td style="padding-left: 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px; text-align: center;">4</td> <td style="padding-left: 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px; text-align: center;">21</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px; text-align: center;">S 20</td> <td style="padding-left: 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px; text-align: center;">2000</td> </tr> </table> </div>	LOT 24		4			21	S 20			2000
LOT 24											
4											
	21										
S 20											
	2000										
	Set a steel fence post alongside the stainless post.										

Metes and Bounds Survey of Lot 24, Section 20,
T. 29 N., R. 100 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 0° 42' W., on line 4-1, Lot 24, identical in part with the line bet. secs. 20 and 21.</p> <p>Over rolling terrain.</p> <p>3.02 Willow Creek, course ESE.</p> <p>3.56 Cor. No. 1, Lot 24, identical with the S. 1/16 sec. cor. of secs. 20 and 21, and the point of beginning, said lot contains 14.29 acres, more or less.</p>
<p>GENERAL DESCRIPTION</p> <p>The area embraced in this survey is situated in the southwestern portion of Fremont County, approximately 20 miles south of Lander, Wyoming. The terrain varies from gently rolling to rolling and broken, with the elevation ranging from about 7,800 feet to about 8,100 feet above sea level. The soil is primarily sandy loam mixed with areas of gravel, rock and exposed bedrock. The vegetation consists of sagebrush and native grasses throughout the upper, open areas with patches of pine timber and thick willows along the major drainage, Willow Creek, which flows southeasterly through the section surveyed.</p> <p>The town of South Pass City is located in the southeast quarter of the section and is inhabited by several full time residents, most of whom are employees of the Wyoming State Parks Department. At one time this was a thriving mining community but as the mines played out, people left and today the town is designated as a Wyoming State Historic Site. There are numerous mines and prospect shafts in the area but no current mining activity was noted at the time of this survey.</p> <p>Access to the area is provided by South Pass City Road, which is a well maintained graded gravel road, and intersects Wyoming State Highway No. 28 a mile north of the section surveyed.</p>	

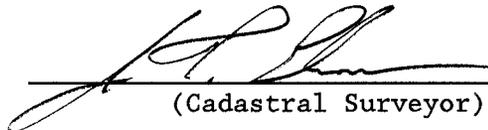
CERTIFICATE OF SURVEY

337

I, Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day of August, 2000, I have dependently resurveyed portions of the subdivisional lines and Mineral Surveys Nos. 50, 80, 89, 183, and 509, and subdivided section 20 and executed the metes and bounds surveys of Lots 16, 19, and 24, section 20, Township 29 North, Range 100 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JUL 30 2001

(Date)


 (Cadastral Surveyor)

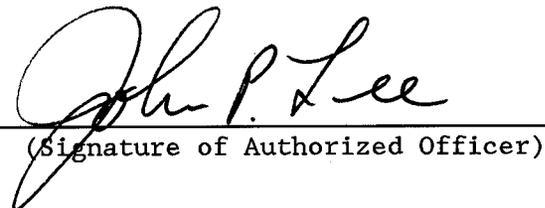
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of portions of the subdivisional lines and Mineral Surveys Nos. 50, 80, 89, 183 and 509, the subdivision of section 20 and the metes and bounds surveys of Lots 16, 19 and 24, section 20, Township 29 North, Range 100 West, Sixth Principal Meridian, Wyoming, executed by Joel T. Ebner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JUL 30 2001

(Date)


 (Signature of Authorized Officer)