

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	N. 0° 21' W., bet. secs. 2 and 3. Over rolling terrain.
19.40	Ridge, bears SSE. and NNW.
40.28	Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T41N R74W 1/4 S 3 S 2 1997
	Set a steel fence post alongside the iron post. Cor. is located 1.05 chs. W. of fence extending N. and S.
80.88	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp. <hr/>
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp. N. 0° 11' W., bet. secs. 33 and 34. Over rolling to broken terrain.
28.00	Ninemile Creek, 60 lks. wide, course E.
40.27	Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T41N R74W 1/4 S 33 S 34 1997
	Set a steel fence post alongside the iron post and raise a mound of stone, 2½ ft. base, 2 ft. high, W. of the cor.
80.54	Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T41N</td> <td>R74W</td> </tr> <tr> <td>S 28</td> <td>S 27</td> </tr> <tr> <td colspan="2" style="text-align: center;">— —</td> </tr> <tr> <td>S 33</td> <td>S 34</td> </tr> <tr> <td colspan="2" style="text-align: center;">1997</td> </tr> </table>	T41N	R74W	S 28	S 27	— —		S 33	S 34	1997	
T41N	R74W										
S 28	S 27										
— —											
S 33	S 34										
1997											
	Set a steel fence post alongside the iron post.										
	From the cor. of secs. 26, 27, 34 and 35.										
	S. 89° 45' W., bet. secs. 27 and 34.										
	Over rolling to broken terrain.										
23.80	Ridge, bears N. and S.										
40.455	Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original cor.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T41N</td> <td>R74W</td> </tr> <tr> <td>S 27</td> <td>—</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 34</td> <td>—</td> </tr> <tr> <td colspan="2" style="text-align: center;">1997</td> </tr> </table>	T41N	R74W	S 27	—	1/4	—	S 34	—	1997	
T41N	R74W										
S 27	—										
1/4	—										
S 34	—										
1997											
	Set a steel fence post alongside the iron post and raise a mound of stone, 2½ ft. base, 2 ft. high, N. of the cor.										
80.91	The cor. of secs. 27, 28, 33 and 34.										
	N. 0° 25' W., bet. secs. 27 and 28.										
	Over rolling terrain.										
19.70	Ridge, bears E. and W.										
36.00	Wash, 1.20 chs. wide, drains W.										
40.27	Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.										

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W 1/4 S 28 S 27 1997</p>
80.54	<p>Set a steel fence post alongside the iron post.</p> <p>Point for the cor. of secs. 21, 22, 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 21 S 22 ----- S 28 S 27 1997</p> <p>Set a steel fence post alongside the iron post.</p> <hr/>
40.33	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>S. 89° 41' W., bet. secs. 22 and 27.</p> <p>Over rolling to broken terrain, along dim fence scar.</p> <p>The 1/4 sec. cor. of secs. 22 and 27, determined longitudinally by proportionate measurement and latitudinally by fence scar extending E. and W.; there is no remaining evidence of the original monument.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 22 1/4 ——— S 27 1997</p> <p>Set a steel fence post alongside the iron post.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.33	<p>N. 89° 48' W., beginning new measurement.</p> <p>Over rolling terrain, along fading fence scar.</p> <p>The cor. of secs. 21, 22, 27 and 28.</p> <hr/>
40.27	<p>N. 0° 19' E., bet. secs. 21 and 22.</p> <p>Over rolling to broken terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T41N R74W 1/4 S 21 S 22 1997</p> </div>
80.54	<p>Set a steel fence post alongside the iron post.</p> <p>Point for the cor. of secs. 15, 16, 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T41N R74W S 16 S 15 <hr/>S 21 S 22 1997</p> </div>
25.60	<p>Set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 89° 56' W., bet. secs. 15 and 22.</p> <p>Over rolling to broken terrain.</p>
40.385	<p>Ridge, bears SE. and NW.</p>
40.385	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 15 1/4 ——— S 22 1997</p>
	<p>Set a steel fence post alongside the iron post.</p>
70.00	Spur, slopes S.
80.77	The cor. of secs. 15, 16, 21 and 22.
<hr/>	
	<p>N. 0° 26' W., bet. secs. 15 and 16.</p> <p>Over rolling to broken terrain.</p>
16.60	Ridge, bears E. and W.
40.27	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W 1/4 S 16 S 15 1997</p>
	<p>Set a steel fence post alongside the iron post.</p>
80.54	<p>Point for the cor. of secs. 9, 10, 15 and 16, at proportionate distance, falls on E. edge of oil field road, 15 lks. wide, extending SE. and NW. along ridge; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. below the scoria surface of the road, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 9 S 10 ————— S 16 S 15 1997</p>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	from which
	<p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 72¼° E., 42.3 lks. dist., with brass cap mkd. RM T41N R74W S10 27.9 FT. TO COR. 1997 and an arrow pointing to the cor.</p>
	<p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 17° W., 44.6 lks. dist., with brass cap mkd. RM T41N R74W S16 29.4 FT. TO COR. 1997 and an arrow pointing to the cor.</p>
	Set steel fence posts alongside the reference monuments.
	<p>From this point, a sandstone bears N. 42° 02' W., 1.90 chs. dist., firmly set, projecting 1lx2x2 ins. above the ground, no mks. visible, in fence extending E. and W. This position is not utilized during the course of this resurvey.</p>
	From the cor. of secs. 10, 11, 14 and 15.
	S. 89° 55' W., bet. secs. 10 and 15.
	Over rolling terrain.
39.80	Wash, 70 lks. wide, drains ESE.
40.535	Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T41N R74W S 10 1/4 ——— S 15 1997</p>
	Set a steel fence post alongside the iron post.
	Cor. is located approximately 1.2 chs. S. of fence extending irregularly E. and W.
81.07	The cor. of secs. 9, 10, 15 and 16.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 0° 37' W., bet. secs. 9 and 10.
	Over rolling terrain.
1.40	Fence, bears E. and W.
3.80	Ridge, bears NE. and SW.
40.27	Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W 1/4 S 9 S 10 1997
	Set a steel fence post alongside the iron post.
	Cor. is located 97 lks. E. of fence extending NNE. and SSW.
42.90	Wash, 20 lks. wide, drains NE.
54.60	Spur, slopes NNE.
80.54	The cor. of secs. 3, 4, 9 and 10, determined longitudinally by proportionate measurement and latitudinally by fence extending E. and W.; there is no remaining evidence of the original monument.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T41N R74W S 4 S 3 ———— S 9 S 10 1997
	Cor. is located 2.33 chs. W. of cor. of fences extending S. and W.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	From the cor. of secs. 2, 3, 10 and 11.
	S. 89° 54' W., bet. secs. 3 and 10.
	Over rolling terrain.
26.20	Low ridge, bears SSE. and NNW.
40.615	Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate distance, falls in dim trail road extending SSE. and NNW.; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.
	T41N R74W S 3 1/4 ——— S 10 1997
	Set a steel fence post 10 lks. W. of the iron post.
44.30	Ridge, bears NE. and SW.
81.23	The cor. of secs. 3, 4, 9 and 10.
	N. 0° 02' W., bet. secs. 3 and 4.
	Over rolling terrain.
40.15	Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W 1/4 S 4 S 3 1997
	Set a steel fence post alongside the iron post.
41.00	Private road, bears ENE. and WSW.
80.11	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.</p> <p>N. 0° 27' W., bet. secs. 32 and 33.</p> <p>Over rolling to broken terrain.</p>
40.30	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W 1/4 S 32 S 33 1997</p> <p>Set a steel fence post alongside the iron post.</p>
52.60	Ninemile Creek, 20 lks. wide, course SE.
68.50	Ninemile Creek, 20 lks. wide, course SW.
80.60	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 29 S 28 ----- S 32 S 33 1997</p> <p>Set a steel fence post alongside the iron post.</p>
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 44' W., bet. secs. 28 and 33.</p> <p>Over rolling to broken terrain.</p>
6.40	Spur, slopes S.
40.59	Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W S 28 1/4 ——— S 33 1997
	Set a steel fence post alongside the iron post.
54.60	Ninemile Creek, 10 lks. wide, course SSW.
81.18	The cor. of secs. 28, 29, 32 and 33.
<hr/>	
	N. 0° 18' W., bet. secs. 28 and 29.
	Over rolling to broken terrain.
6.30	Ninemile Creek, 20 lks. wide, course ESE.
24.70	Ridge, bears SE. and NW.
40.30	Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W 1/4 S 29 S 28 1997
	Set a steel fence post alongside the iron post.
74.00	Ninemile Creek, 40 lks. wide, course SSW.
79.40	S. edge of Ninemile Creek, 50 lks. wide, course SSE.
80.60	True point for the cor. of secs. 20, 21, 28 and 29, at proportionate distance, falls in Ninemile Creek, 60 lks. wide, course SSE., where it is impracticable to establish a permanent monument; there is no remaining evidence of the original cor.
<hr/>	
	From the cor. of secs. 21, 22, 27 and 28.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	S. 89° 46' W., bet. secs. 21 and 28. Over rolling to broken terrain.
35.70	Spur, slopes NW.
40.505	Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T41N R74W S 21 1/4 ——— S 28 1997 </div>
	Set a steel fence post alongside the iron post.
80.36	Point selected for the witness cor. to the cor. of secs. 20, 21, 28 and 29. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> W C T41N R74W S 20 S 21 ←——— S 29 S 28 1997 </div>
	Set a steel fence post alongside the iron post.
80.90	E. edge of Ninemile Creek, 60 lks. wide, course SSE.
81.01	True point for the cor. of secs. 20, 21, 28 and 29.
	<hr/> N. 0° 01' E., bet. secs. 20 and 21. Over rolling to broken terrain.
0.30	N. edge of Ninemile Creek, 60 lks. wide, course SSE.
40.30	Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T41N R74W 1/4 S 20 S 21 1997</p>
	Set a steel fence post alongside the iron post.
79.40	Trail road, bears SE. and NW.
80.60	Point for the cor. of secs. 16, 17, 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T41N R74W S 17 S 16 ----- S 20 S 21 1997</p>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 15, 16, 21 and 22.
	S. 89° 48' W., bet. secs. 16 and 21.
	Over rolling terrain.
9.40	Spur, slopes S.
40.71	Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T41N R74W S 16 1/4 ——— S 21 1997</p>
	Set a steel fence post alongside the iron post.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	Cor. is located 60 lks. N. of fence extending ENE. and WSW.										
81.42	The cor. of secs. 16, 17, 20 and 21.										
	N. 0° 13' W., bet. secs. 16 and 17.										
	Over rolling terrain.										
32.30	Spur, slopes SE.										
40.30	Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T41N R74W</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td>S 17</td><td>S 16</td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table>	T41N R74W		1/4		S 17	S 16	1997			
T41N R74W											
1/4											
S 17	S 16										
1997											
	Set a steel fence post alongside the iron post.										
66.30	Ridge, bears NE. and SW.										
80.60	Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T41N R74W</td></tr> <tr><td>S 8</td><td>S 9</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td>S 17</td><td>S 16</td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table>	T41N R74W		S 8	S 9	-----		S 17	S 16	1997	
T41N R74W											
S 8	S 9										

S 17	S 16										
1997											
	Set a steel fence post alongside the iron post.										
	Cor. is located approximately 3.3 chs. W. of projection of abandoned fence from the N.										
	From the cor. of secs. 9, 10, 15 and 16.										
	S. 89° 51' W., bet. secs. 9 and 16.										
	Over rolling to broken terrain.										

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.54	<p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W S 9 1/4 ——— S 16 1997</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, U.S. Geological Survey Vertical Angle Bench Mark LAURIN, bears N. 24° 51' E., 17.12 chs. dist., monumented with a standard brass tablet, 3 ins. diam., seated in a concrete post, 6 ins. sq., mkd. VABM ELEVATION 5387 FEET LAURIN 1952 and a triangle.</p> <p>Cor. is located approximately 1.4 chs. S. of fence scar extending E. and W.</p>
45.70	Trail road, bears ENE. and WSW.
81.08	The cor. of secs. 8, 9, 16 and 17.
	N. 0° 19' W., bet. secs. 8 and 9.
	Over rolling terrain.
40.30	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T41N R74W 1/4 S 8 S 9 1997</p> <p>Set a steel fence post alongside the iron post.</p>
57.40	Ridge, bears SE. and NW.
80.60	Point for the cor. of secs. 4, 5, 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.										
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T41N</td><td>R74W</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 8</td><td>S 9</td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table>	T41N	R74W	S 5	S 4			S 8	S 9	1997	
T41N	R74W										
S 5	S 4										
S 8	S 9										
1997											
	Set a steel fence post alongside the iron post.										
	Cor. is located approximately 2.1 chs. W. of fence extending N. and S.										
	<hr/>										
	From the cor. of secs. 3, 4, 9 and 10.										
	N. 89° 35' W., bet. secs. 4 and 9.										
	Over rolling to broken terrain, along fence.										
37.52	A sandstone, firmly set, projecting 13x6x1 ins. above the ground, no mks. visible, at cor. of fences extending E. and N. This position is not utilized during the course of this resurvey.										
40.33	The 1/4 sec. cor. of secs. 4 and 9, determined longitudinally by proportionate measurement and latitudinally at projection of fence from the E.; there is no remaining evidence of the original monument.										
	At the corner point										
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.										
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T41N</td><td>R74W</td></tr> <tr><td>S 4</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 9</td><td></td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table>	T41N	R74W	S 4		1/4	—	S 9		1997	
T41N	R74W										
S 4											
1/4	—										
S 9											
1997											
	Set a steel fence post alongside the iron post.										
	<hr/>										
	S. 89° 20' W., beginning new measurement.										
	Over rolling terrain.										

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.33	The cor. of secs. 4, 5, 8 and 9.
	N. 0° 03' E., bet. secs. 4 and 5.
	Over rolling terrain.
29.50	Spur, slopes NE.
38.00	Wash, 5 lks. wide, drains NE.
40.30	Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W 1/4 S 5 S 4 1997
	Set a steel fence post alongside the iron post.
	From this point, a sandstone bears N. 40° 33' E., 1.88 chs. dist., firmly set, projecting 9x5x3 ins. above the ground, no mks. visible, in fence scar extending N. and S. This position is not utilized during the course of this resurvey.
80.70	The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.
	From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.
	N. 0° 38' W., bet. secs. 31 and 32.
	Over rolling to broken terrain.
36.40	Ridge, bears ENE. and WSW.
40.25	Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T41N R74W 1/4 S 31 S 32 1997
	Set a steel fence post alongside the iron post.
44.80	Wash, 40 lks. wide, drains ESE.
52.10	Ridge, bears E. and W.
80.50	Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W S 30 S 29 ———— S 31 S 32 1997
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 28, 29, 32 and 33.
	S. 89° 34' W., bet. secs. 29 and 32.
	Over rolling to broken terrain.
33.80	Spur, slopes S.
40.515	Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W S 29 1/4 ——— S 32 1997
	Set a steel fence post alongside the iron post.
71.10	Spur, slopes S.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS													
81.03	The cor. of secs. 29, 30, 31 and 32.												
	S. 89° 46' W., bet. secs. 30 and 31.												
	Over rolling to broken terrain.												
2.30	Spur, slopes S.												
40.29	Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.												
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T41N</td><td>R74W</td></tr> <tr><td></td><td>S 30</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td></td><td>S 31</td></tr> <tr><td></td><td>1997</td></tr> </table>	T41N	R74W		S 30	1/4	—		S 31		1997		
T41N	R74W												
	S 30												
1/4	—												
	S 31												
	1997												
	Set a steel fence post alongside the iron post.												
80.94	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, in a collar of stone, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T41N</td><td></td></tr> <tr><td>R75W</td><td>R74W</td></tr> <tr><td>S 25</td><td>S 30</td></tr> <tr><td>—</td><td>—</td></tr> <tr><td>S 36</td><td>S 31</td></tr> <tr><td></td><td>1954</td></tr> </table>	T41N		R75W	R74W	S 25	S 30	—	—	S 36	S 31		1954
T41N													
R75W	R74W												
S 25	S 30												
—	—												
S 36	S 31												
	1954												
	From the cor. of secs. 29, 30, 31 and 32.												
	N. 0° 10' W., bet. secs. 29 and 30.												
	Over rolling terrain.												
16.00	Ridge, bears ESE. and WNW.												
40.25	Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.												
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.												

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T41N R74W 1/4 S 30 S 29 1997
	Set a steel fence post alongside the iron post.
65.80	Ridge, bears E. and W.
80.50	Point for the cor. of secs. 19, 20, 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W S 19 S 20 ———— S 30 S 29 1997
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 20, 21, 28 and 29.
	S. 89° 30' W., bet. secs. 20 and 29.
	Over gently rolling terrain.
0.80	W. edge of Ninemile Creek, 60 lks. wide, course SSE.
40.415	Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T41N R74W S 20 1/4 ——— S 29 1997
	Set a steel fence post alongside the iron post.
80.83	The cor. of secs. 19, 20, 29 and 30.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS													
	S. 89° 34' W., bet. secs. 19 and 30. Over rolling terrain.												
13.20	Spur, slopes S.												
40.22	The 1/4 sec. cor. of secs. 19 and 30, determined latitudinally by proportionate measurement and longitudinally by fence extending N. and S.; there is no remaining evidence of the original monument. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> <table> <tr><td>T41N</td><td>R74W</td></tr> <tr><td>S 19</td><td>—</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 30</td><td>—</td></tr> <tr><td>1997</td><td></td></tr> </table> <hr style="width: 20%; margin: 10px auto;"/> </div>	T41N	R74W	S 19	—	1/4	—	S 30	—	1997			
T41N	R74W												
S 19	—												
1/4	—												
S 30	—												
1997													
	S. 89° 34' W., beginning new measurement. Over rolling terrain.												
2.70	Ridge, bears N. and S.												
27.30	Spur, slopes NNW.												
40.58	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. <div style="text-align: center;"> <table> <tr><td colspan="2">T41N</td></tr> <tr><td>R75W</td><td>R74W</td></tr> <tr><td>S 24</td><td>S 19</td></tr> <tr><td colspan="2">—</td></tr> <tr><td>S 25</td><td>S 30</td></tr> <tr><td colspan="2">1954</td></tr> </table> </div>	T41N		R75W	R74W	S 24	S 19	—		S 25	S 30	1954	
T41N													
R75W	R74W												
S 24	S 19												
—													
S 25	S 30												
1954													
	Set a steel fence post alongside the iron post. <hr/>												
	From the cor. of secs. 19, 20, 29 and 30. N. 0° 17' W., bet. secs. 19 and 20.												

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over rolling terrain.
40.25	Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T41N R74W 1/4 S 19 S 20 1997 </div>
	Set a steel fence post alongside the iron post.
80.50	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T41N R74W S 18 S 17 <hr style="width: 50%; margin: 0 auto;"/> S 19 S 20 1997 </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 16, 17, 20 and 21. S. 89° 26' W., bet. secs. 17 and 20. Over rolling to broken terrain.
19.70	Ridge, bears N. and S.
38.40	Descend steep slope.
40.615	Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T41N R74W S 17 1/4 ——— S 20 1997 </div>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
	Cor. is located 60 lks. N. of Ninemile Creek, 40 lks. wide, course E.
53.50	Ninemile Creek, 20 lks. wide, course S.
60.00	Ninemile Creek, 20 lks. wide, course NE.
79.00	Ninemile Creek, 15 lks. wide, course SSE.
81.23	The cor. of secs. 17, 18, 19 and 20.
	<hr/> S. 89° 23' W., bet. secs. 18 and 19.
	Over rolling terrain.
0.80	Ninemile Creek, 10 lks. wide, course N.
20.40	Ninemile Creek, 40 lks. wide, course SSW.
40.53	The 1/4 sec. cor. of secs. 18 and 19, determined latitudinally by proportionate measurement and longitudinally at projection of fence from the S.; there is no remaining evidence of the original monument.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.
	<div style="text-align: center;"> T41N R74W S 18 1/4 ——— S 19 1997 </div>
	Set a steel fence post alongside the iron post.
	<hr/> S. 89° 23' W., beginning new measurement.
	Over rolling to broken terrain.
9.90	Spur, slopes NW.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS													
39.97	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with a sandstone, firmly set, projecting 8x6x4 ins. above the ground, no mks. visible, alongside, at angle point in fence extending ENE. and W., with brass cap mkd.</p>												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T41N</td></tr> <tr><td style="text-align: center;">R75W</td><td style="text-align: center;">R74W</td></tr> <tr><td style="text-align: center;">S 13</td><td style="text-align: center;">S 18</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S 24</td><td style="text-align: center;">S 19</td></tr> <tr><td colspan="2" style="text-align: center;">1954</td></tr> </table>	T41N		R75W	R74W	S 13	S 18	-----		S 24	S 19	1954	
T41N													
R75W	R74W												
S 13	S 18												

S 24	S 19												
1954													
	<p>From the cor. of secs. 17, 18, 19 and 20.</p>												
	<p>N. 0° 12' E., bet. secs. 17 and 18.</p>												
	<p>Over rolling to broken terrain.</p>												
3.90	<p>Ninemile Creek, 15 lks. wide, course SE.</p>												
31.70	<p>Ridge, bears ENE. and WSW.</p>												
36.20	<p>Wash, 5 lks. wide, drains W.</p>												
40.25	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p>												
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T41N R74W</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td style="text-align: center;">S 18</td><td style="text-align: center;">S 17</td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table>	T41N R74W		1/4		S 18	S 17	1997					
T41N R74W													
1/4													
S 18	S 17												
1997													
	<p>Set a steel fence post alongside the iron post.</p>												
58.60	<p>Spur, slopes SSE.</p>												
80.50	<p>The cor. of secs. 7, 8, 17 and 18, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, at cor. of fences extending N. and W., as filed in the Campbell County Clerk's Office, with aluminum cap mkd.</p>												

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T41N R74W S 7 S 8 <hr style="width: 50%; margin: auto;"/> S 18 S 17 PLS 538 1988
	<p>This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <hr/> <p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 89° 21' W., bet. secs. 8 and 17.</p> <p>Over rolling terrain.</p>
38.70	Wash, 40 lks. wide, drains WSW.
40.315	<p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	T41N R74W S 8 1/4 ——— S 17 1997
	<p>Set a steel fence post alongside the iron post.</p>
76.20	Ridge, bears SE. and NW.
80.63	The cor. of secs. 7, 8, 17 and 18.
	<hr/> <p>S. 89° 12' W., bet. secs. 7 and 18.</p> <p>Over rolling to broken terrain, along fence.</p>
31.60	Tree Draw, 10 lks. wide, drains SSE.
40.82	The 1/4 sec. cor. of secs. 7 and 18, determined longitudinally by proportionate measurement and latitudinally by fence extending E. and W.; there is no remaining evidence of the original monument.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T41N R74W S 7 1/4 ——— S 18 1997 </div>
	Cor. is located 1.50 chs. W. of trail road extending NNE. and SSW.
	<hr style="width: 20%; margin: auto;"/> S. 89° 22' W., beginning new measurement.
	Over rolling terrain, along fence.
24.50	Ridge, bears SSW. and NNW.
40.31	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, at intersection of fences extending N., E. and S., with brass cap mkd.
	<div style="text-align: center;"> T41N R75W R74W S 12 S 7 ———— S 13 S 18 1954 </div>
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 30' W., bet. secs. 7 and 8.
	Over rolling terrain, leaving fence.
13.20	Ridge, bears NE. and SW.
40.43	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T41N R74W 1/4 S 7 S 8 1997</p>
	<p>Set a steel fence post alongside the iron post.</p>
77.10	<p>Ridge, bears ESE. and WNW.</p>
80.86	<p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T41N R74W S 6 S 5 ----- S 7 S 8 1997</p>
	<p>Set a steel fence post alongside the iron post.</p>
	<p>From this point, a traverse station bears S. 12° 41' W., 2.13 chs. dist., monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with a steel reinforcement rod, 5/8 in. diam., firmly set flush with the surface of the ground, with plastic cap inscribed CONT. PT. LS 538.</p>
	<p>From the cor. of secs. 4, 5, 8 and 9.</p>
	<p>S. 89° 32' W., bet. secs. 5 and 8.</p>
	<p>Over rolling terrain.</p>
22.60	<p>Ridge, bears NNE. and SSE.</p>
40.43	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T41N R74W S 5 1/4 ——— S 8 1997</p>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
80.86	<p>Set a steel fence post alongside the iron post.</p> <p>The cor. of secs. 5, 6, 7 and 8.</p> <hr/>
40.56	<p>S. 89° 09' W., bet. secs. 6 and 7.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-left: 100px;"> <p>T41N R74W</p> <p>S 6</p> <p>1/4 ———</p> <p>S 7</p> <p>1997</p> </div>
48.50	<p>Set a steel fence post alongside the iron post.</p> <p>Tree Draw, 5 lks. wide, drains SSE.</p>
80.79	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, in fence extending N. and S., with brass cap mkd.</p> <div style="text-align: center; margin-left: 100px;"> <p>T41N</p> <p>R75W R74W</p> <p>S 1 S 6</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S 12 S 7</p> <p>1954</p> </div>
29.90	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0° 01' E., bet. secs. 5 and 6.</p> <p>Over rolling terrain.</p> <p>Ridge, bears SE. and NW.</p>
40.43	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines
T. 41 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>CHAINS</p> <p>80.71</p>	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R74W 1/4 S 6 S 5 1997</p> <p>Set a steel fence post alongside the iron post.</p> <p>The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in Campbell and Converse Counties, approximately 25 miles southwest of Wright, Wyoming. The terrain varies from gently rolling to broken, with the elevation ranging from about 4,970 feet above sea level where Ninemile Creek leaves the township along the south boundary of section 34, to 5,389 feet above sea level at U.S. Geological Survey Station LAURIN in section 9. The soil varies from gravelly sandy loam to clay, with areas of exposed scoria and bedrock. Vegetation consists of sagebrush and native prairie grasses.</p> <p>Primary drainage is provided by Ninemile Creek, which drains the southwestern portion of the township. Pine Tree Draw drains the northwestern portion and is tributary to Ninemile Creek. Mexican Springs drains the eastern portion. Pine Tree Ranch is located in section 4 and Ninemile Ranch is located in section 20. There is evidence of oil and gas exploration throughout the area.</p> <p>Access is provided by improved oil field roads, private roads and trail roads extending throughout the township.</p>
----------------------------	--

CERTIFICATE OF SURVEY

I, Richard A. Kohler, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of April, 1995, I have dependently resurveyed a portion of the Tenth Standard Parallel North, through Range 74 West, the north boundary and the subdivisional lines, Township 41 North, Range 74 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

MAY 18 2000

(Date)



(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of a portion of the Tenth Standard Parallel North, through Range 74 West, the north boundary and the subdivisional lines, Township 41 North, Range 74 West, Sixth Principal Meridian, Wyoming, executed by Richard A. Kohler, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

MAY 18 2000

(Date)

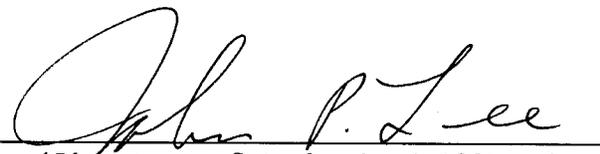

(Signature of Authorized Officer)