

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 33   S 34 1999</p> <p>Set a steel fence post alongside the iron post.</p>
80.32	<p>Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance, falls in previously cultivated field; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 28   S 27 ----- S 33   S 34 1999</p> <p>Set a steel fence post alongside the iron post.</p>
40.095	<p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>S. 86° 39' W., bet. secs. 27 and 34.</p> <p>Over rolling terrain.</p> <p>Point for the ¼ sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 27 1/4 ——— S 34 1999</p> <p>Set a steel fence post alongside the iron post.</p>
41.50	<p>Wild Horse Creek, course WNW.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
80.19	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/>
	<p>N. 1° 48' E., bet. secs. 27 and 28.</p> <p>Over gently rolling terrain.</p>
40.18	<p>Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate distance, falls in previously cultivated field; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 28   S 27 1999</p> <p>Set a steel fence post alongside the iron post.</p>
56.90	<p>Montgomery Road, bears E. and W.</p>
60.27	<p>Point for the N. 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W N1/16 S 28   S 27 1999</p> <p>Set a steel fence post alongside the iron post.</p>
75.90	<p>Wild Horse Creek, course NW.</p>
80.36	<p>Point for the cor. of secs. 21, 22, 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 21   S 22 <hr/>S 28   S 27 1999</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 22, 23, 26 and 27.
	S. 86° 35' W., bet. secs. 22 and 27.
	Over rolling terrain.
40.39	Point for the ¼ sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W S 22 1/4 ——— S 27 1999</p>
	Set a steel fence post alongside the iron post.
60.585	Point for the W. 1/16 sec. cor. of secs. 22 and 27.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W S 22 W1/16 ——— S 27 1999</p>
	Set a steel fence post alongside the iron post.
80.78	The cor. of secs. 21, 22, 27 and 28.
	N. 0° 35' W., bet. secs. 21 and 22.
	Over gently rolling terrain., along Wild Horse Creek.
20.08	Point for the S. 1/16 sec. cor. of secs. 21 and 22.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T50N R74W S1/16 S 21   S 22 1999</p>
	<p>Set a steel fence post alongside the iron post.</p>
	<p>Cor. is located 5 lks. N. of Wild Horse Creek, course WNW.</p>
40.16	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2<math>\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T50N R74W 1/4 S 21   S 22 1999</p>
	<p>Set a steel fence post alongside the iron post.</p>
59.10	<p>East Fork Wild Horse Creek, course NW.</p>
80.32	<p>The cor. of secs. 15, 16, 21 and 22, monumented by Robert J. Timm, Wyoming Professional Engineer and Land Surveyor No. 2457, with an iron post, 2<math>\frac{1}{2}</math> ins. diam., firmly set, projecting 9 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p>
	<p style="text-align: center;">T50N R74W S 16   S 15 ----- S 21   S 22 PELS 2457 1981</p>
	<p>This position is accepted as the best available evidence of the original cor. position.</p>
	<p>From this point, a position established by Thomas E. Nelson, Wyoming Professional Engineer and Land Surveyor No. 387, bears S. 18° 42' E., 1.25 chs. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 5 ins. above the ground, with aluminum cap mkd. WYOMING RLS 387. This position is not accepted as the best available evidence of the original cor. position.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 87° 02' W., bet. secs. 15 and 22.</p> <p>Over rolling terrain.</p> <p>41.31 The ¼ sec. cor. of secs. 15 and 22, monumented by Robert J. Timm, Wyoming Professional Engineer and Land Surveyor No. 2457, as filed in the Campbell County Clerk's Office, with an iron post, 2½ ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 15 ----- S 22 PELS 2457 1981</p> <p>This position is accepted as the best available evidence of the original cor. position.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 87° 03' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>1.00 Wash, drains SSE.</p> <p>41.30 The cor. of secs. 15, 16, 21 and 22.</p> <hr/> <p>NORTH, bet. secs. 15 and 16.</p> <p>Over rolling terrain.</p> <p>40.86 The ¼ sec. cor. of secs. 15 and 16, monumented by Robert J. Timm, Wyoming Professional Engineer and Land Surveyor No. 2457, with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 16   S 15 PELS 2457 1981</p> <p>This position is accepted as the best available evidence of the original cor. position.</p>
--------	---

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a steel fence post alongside the iron post.</p> <hr/> <p>N. 0° 03' E., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>40.65 The cor. of secs. 9, 10, 15 and 16, monumented by Robert J. Timm, Wyoming Professional Engineer and Land Surveyor No. 2457, as filed in the Campbell County Clerk's Office, with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 9</td><td>S 10</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 16</td><td>S 15</td></tr> <tr><td colspan="2">PELS 2457 1981</td></tr> </table> </div> <p>This position is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located 58 lks. S. of fence extending E. and W.</p> <hr/> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 86° 11' W., bet. secs. 10 and 15.</p> <p>Over rolling terrain.</p> <p>40.17 The ¼ sec. cor. of secs. 10 and 15, monumented by Robert J. Timm, Wyoming Professional Engineer and Land Surveyor No. 2457, with an iron post, 2½ ins. diam., firmly set, projecting 8 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td colspan="2">S 10</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td colspan="2">S 15</td></tr> <tr><td colspan="2">PELS 2457 1981</td></tr> </table> </div> <p>This position is accepted as the best available evidence of the original cor. position.</p> <p>From this point, a red sandstone, firmly set, projecting 26x16x6 ins. above the ground, on top of ridge, bears N. 33° 11' E., 13.59 chs. dist., plainly mkd. HERE PASSED THE ASTORIANS AUG 15 1811.</p> <hr/>	T50N R74W		S 9	S 10	<hr/>		S 16	S 15	PELS 2457 1981		T50N R74W		1/4		S 10		<hr/>		S 15		PELS 2457 1981	
T50N R74W																							
S 9	S 10																						
<hr/>																							
S 16	S 15																						
PELS 2457 1981																							
T50N R74W																							
1/4																							
S 10																							
<hr/>																							
S 15																							
PELS 2457 1981																							

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>S. 86° 10' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
20.085	<p>Point for the W. 1/16 sec. cor. of secs. 10 and 15.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 10 W1/16 ——— S 15 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located N. 67¼° W., 1.83 chs. dist. from intersection of fences extending N., S. and W.</p>
40.17	<p>The cor. of secs. 9, 10, 15 and 16.</p>
	<p>N. 0° 11' E., bet. secs. 9 and 10.</p> <p>Over rolling terrain.</p>
20.38	<p>Point for the S. 1/16 sec. cor. of secs. 9 and 10.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S1/16 S 9   S 10 1999</p> <p>Set a steel fence post alongside the iron post.</p>
40.76	<p>Point for the ¼ sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 9   S 10 1999</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	Set a steel fence post alongside the iron post.										
81.52	Point for the cor. of secs. 3, 4, 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2">— —</td></tr> <tr><td>S 9</td><td>S 10</td></tr> <tr><td colspan="2">1999</td></tr> </table>	T50N R74W		S 4	S 3	— —		S 9	S 10	1999	
T50N R74W											
S 4	S 3										
— —											
S 9	S 10										
1999											
	Set a steel fence post alongside the iron post.										
	Cor. is located 1.40 chs. S. of Bekebrede Draw, drains NW.										
	From the cor. of secs. 2, 3, 10 and 11.										
	S. 86° 34' W., bet. secs. 3 and 10.										
	Over rolling terrain.										
40.20	Point for the ¼ sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original cor.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 3</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 10</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table>	T50N R74W		S 3		1/4	—	S 10		1999	
T50N R74W											
S 3											
1/4	—										
S 10											
1999											
	Set a steel fence post alongside the iron post.										
60.30	Point for the W. 1/16 sec. cor. of secs. 3 and 10.										
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 3</td><td></td></tr> <tr><td>W1/16</td><td>—</td></tr> <tr><td>S 10</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table>	T50N R74W		S 3		W1/16	—	S 10		1999	
T50N R74W											
S 3											
W1/16	—										
S 10											
1999											

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
80.40	The cor. of secs. 3, 4, 9 and 10.
	<hr/> <p>N. 2° 15' E., bet. secs. 3 and 4.</p> <p>Over rolling terrain.</p>
40.79	<p>Point for the ¼ sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T50N R74W 1/4 S 4   S 3 1999</p>
	Set a steel fence post alongside the iron post.
77.40	Echeta Road, bears ESE. and WNW.
81.27	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1998 field notes of the dependent resurvey, T. 51 N., R. 74 W.
	<hr/> <p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., as described in the field notes of the dependent resurvey, T. 49 N., R. 74 W., executed concurrently under this same group.</p>
	N. 0° 18' E., bet. secs. 32 and 33.
	Over rolling and broken terrain.
40.69	<p>Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T50N R74W 1/4 S 32   S 33 1999</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	Set a steel fence post alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.										
81.38	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T50N R74W</td><td></td></tr> <tr><td>S 29</td><td>S 28</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 32</td><td>S 33</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p>	T50N R74W		S 29	S 28	<hr/>		S 32	S 33	1999	
T50N R74W											
S 29	S 28										
<hr/>											
S 32	S 33										
1999											
	<hr/> <p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 50' W., bet. secs. 28 and 33.</p> <p>Over rolling and broken terrain.</p>										
39.875	<p>Point for the ¼ sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T50N R74W</td><td></td></tr> <tr><td>S 28</td><td></td></tr> <tr><td>1/4</td><td><hr/></td></tr> <tr><td>S 33</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post and raise a mound of stone, 4 ft. base, 3 ft. high, N. of the cor.</p>	T50N R74W		S 28		1/4	<hr/>	S 33		1999	
T50N R74W											
S 28											
1/4	<hr/>										
S 33											
1999											
79.75	<p>The cor. of secs. 28, 29, 32 and 33.</p> <hr/> <p>N. 1° 20' E., bet. secs. 28 and 29.</p> <p>Over rolling terrain.</p>										
40.70	<p>Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original cor.</p>										

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W 1/4 S 29   S 28 1999</p>
48.00	Set a steel fence post alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor. Montgomery Road, bears ENE. and WSW.
81.40	Point for the cor. of secs. 20, 21, 28 and 29, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 20   S 21 ----- S 29   S 28 1999</p> <p>Set a steel fence post alongside the iron post. Cor. is located in small wash, drains NNW.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28. N. 89° 25' W., bet. secs. 21 and 28. Over rolling terrain.</p>
2.60	Wild Horse Creek, course NNE.
20.09	<p>Point for the E. 1/16 sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 21 E1/16 ——— S 28 1999</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
22.40	Road, gravel surfaced, bears N. and S.
40.18	Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T50N R74W S 21 1/4 ——— S 28 1999
	Set a steel fence post alongside the iron post.
80.36	The cor. of secs. 20, 21, 28 and 29.
	N. $0^{\circ} 46'$ E., bet. secs. 20 and 21.
	Over rolling terrain.
40.69	Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T50N R74W 1/4 S 20   S 21 1999
	Set a steel fence post alongside the iron post.
61.035	Point for the N. $1/16$ sec. cor. of secs. 20 and 21.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T50N R74W N1/16 S 20   S 21 1999
	Set a steel fence post alongside the iron post.

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
81.38	<p>The cor. of secs. 16, 17, 20 and 21, at cor. of abandoned fences extending N. and other direction(s) indeterminate, with a broken sandstone, 6x4x2 ins., lying loose alongside, no mks. visible. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 17</td><td>S 16</td></tr> <tr><td colspan="2">— —</td></tr> <tr><td>S 20</td><td>S 21</td></tr> <tr><td colspan="2">1999</td></tr> </table> <p>Bury the unmkd. stone and set a steel fence post alongside the iron post.</p>	T50N R74W		S 17	S 16	— —		S 20	S 21	1999	
T50N R74W											
S 17	S 16										
— —											
S 20	S 21										
1999											
	<hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 88° 38' W., bet. secs. 16 and 21.</p> <p>Over gently rolling terrain.</p>										
39.23	<p>Point for the ¼ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td colspan="2">S 16</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td colspan="2">S 21</td></tr> <tr><td colspan="2">1999</td></tr> </table> <p>Set a steel fence post alongside the iron post.</p>	T50N R74W		S 16		1/4	—	S 21		1999	
T50N R74W											
S 16											
1/4	—										
S 21											
1999											
59.80	Wild Horse Creek, course NNW.										
78.46	<p>The cor. of secs. 16, 17, 20 and 21.</p> <hr/> <p>N. 0° 16' W., bet. secs. 16 and 17.</p> <p>Over rolling terrain, along abandoned fence.</p>										

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
23.00	Wild Horse Creek, course NW.
40.11	<p>The ¼ sec. cor. of secs. 16 and 17, at cor. of abandoned fences extending S. and W., with decayed remains of sandstone lying alongside. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T50N R74W 1/4 S 17   S 16 1999</p> </div> <p>Bury the decayed remains of sandstone and set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	N. 0° 24' W., beginning new measurement.
	Over rolling terrain.
40.33	<p>The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 13x9x6 ins., loosely set 3 ins. in the ground, no mks. visible, with remains of surveyors stakes and lath alongside. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T50N R74W S 8   S 9 ----- S 17   S 16 1999</p> </div> <p>Bury the unmkd. stone and set a steel fence post alongside the iron post.</p> <p>Cor. is located 16 lks. S. of fence extending E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>N. 89° 25' W., bet. secs. 9 and 16.</p> <p>Over gently rolling terrain.</p>
39.46	<p>Point for the ¼ sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T50N R74W</p> <p>S 9</p> <p>1/4 ———</p> <p>S 16</p> <p>1999</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 29 lks. S. of fence extending E. and W.</p>
78.92	<p>The cor. of secs. 8, 9, 16 and 17.</p> <hr/> <p>N. 0° 34' W., bet. secs. 8 and 9.</p> <p>Over rolling terrain.</p>
40.28	<p>Point for the ¼ sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T50N R74W</p> <p>1/4</p> <p>S 8   S 9</p> <p>1999</p> </div> <p>Set a steel fence post alongside the iron post.</p>
80.56	<p>Point for the cor. of secs. 4, 5, 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<div style="text-align: center;"> <table border="0"> <tr><td>T50N</td><td>R74W</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 8</td><td>S 9</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p> <hr/>	T50N	R74W	S 5	S 4	<hr/>		S 8	S 9	1999	
T50N	R74W										
S 5	S 4										
<hr/>											
S 8	S 9										
1999											
	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 89° 53' W., bet. secs. 4 and 9.</p> <p>Over rolling terrain.</p>										
39.98	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T50N</td><td>R74W</td></tr> <tr><td>S 4</td><td></td></tr> <tr><td>1/4</td><td><hr/></td></tr> <tr><td>S 9</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p>	T50N	R74W	S 4		1/4	<hr/>	S 9		1999	
T50N	R74W										
S 4											
1/4	<hr/>										
S 9											
1999											
79.96	<p>The cor. of secs. 4, 5, 8 and 9.</p> <hr/> <p>N. 1° 45' E., bet. secs. 4 and 5.</p> <p>Over rolling terrain.</p>										
40.29	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T50N</td><td>R74W</td></tr> <tr><td>1/4</td><td></td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p>	T50N	R74W	1/4		S 5	S 4	1999			
T50N	R74W										
1/4											
S 5	S 4										
1999											

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
80.41	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1998 field notes of the dependent resurvey, T. 51 N., R. 74 W.</p>
	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., as described in the field notes of the dependent resurvey, T. 49 N., R. 74 W., executed concurrently under this same group.</p> <p>N. 0° 30' E., bet. secs. 31 and 32.</p> <p>Over rolling terrain.</p>
40.58	<p>Point for the ¼ sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 31   S 32 1999</p> <p>Set a steel fence post alongside the iron post.</p>
81.16	<p>The cor. of secs. 29, 30, 31 and 32, at intersection of abandoned fences extending N., E. and W. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 30   S 29 ----- S 31   S 32 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, a position established by person(s) unknown, bears S. 84° 29' W., 2.61 chs. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set flush with the ground. This position is not accepted during the course of this survey.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>S. 89° 03' W., bet. secs. 29 and 32.</p> <p>Over rolling terrain.</p>
40.12	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 29 1/4 ——— S 32 1999</p> <p>Cor. is located 36 lks. W. of fence extending SE. and NW.</p>
80.24	<p>The cor. of secs. 29, 30, 31 and 32.</p> <hr/>
	<p>S. 89° 03' W., bet. secs. 30 and 31.</p> <p>Over gently rolling terrain.</p>
40.04	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 30 1/4 ——— S 31 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in abandoned fence extending E. and W.</p>
79.41	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1986-87 field notes of the dependent resurvey, T. 50 N., R. 75 W.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	From the cor. of secs. 29, 30, 31 and 32.
	N. 0° 54' E., bet. secs. 29 and 30.
	Over rolling terrain.
38.70	Kingsbury Creek, course E.
40.01	Point for the ¼ sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;">           T50N R74W            1/4            S 30   S 29            1999         </div>
	Set a steel fence post alongside the iron post.
	Cor. is located in abandoned fence extending N. and S.
41.50	Kingsbury Creek, course NW.
72.20	Fence, bears ESE. and WNW.
75.60	Montgomery Road, bears ESE. and WNW.
80.02	Point for the cor. of secs. 19, 20, 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;">           T50N R74W            S 19   S 20  <hr style="width: 50%; margin: 0 auto;"/>           S 30   S 29            1999         </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 20, 21, 28 and 29.
	S. 88° 06' W., bet. secs. 20 and 29.
	Over rolling terrain.

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.445	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 20 1/4 ——— S 29 1999</p> <p>Set a steel fence post alongside the iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p>
54.20	Kingsbury Creek, course ENE.
80.89	The cor. of secs. 19, 20, 29 and 30.
	<hr/> <p>S. <math>89^{\circ} 44'</math> W., bet. secs. 19 and 30.</p> <p>Over rolling terrain.</p>
40.36	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 19 1/4 ——— S 30 1999</p> <p>Set a steel fence post alongside the iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p>
79.61	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, <math>2\frac{1}{2}</math> ins. diam., as described in the 1986-87 field notes of the dependent resurvey, T. 50 N., R. 75 W.</p> <hr/> <p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. <math>2^{\circ} 08'</math> E., bet. secs. 19 and 20.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over rolling and broken terrain.
40.03	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W 1/4 S 19   S 20 1999</p>
	Set a steel fence post alongside the iron post.
69.00	Fence, bears E. and W.
80.06	<p>The cor. of secs. 17, 18, 19 and 20, at old cor. post in mound of stone, at cor. of abandoned fences extending S. and W, no mkd. stone found. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 18   S 17 ----- S 19   S 20 1999</p>
	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>S. <math>87^{\circ} 03' W.</math>, bet. secs. 17 and 20.</p>
	Over rolling and broken terrain.
21.40	Kingsbury Creek, course ENE.
39.52	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T50N R74W S 17 1/4 ——— S 20 1999</p>
79.04	<p>Set a steel fence post alongside the iron post.</p> <p>The cor. of secs. 17, 18, 19 and 20.</p> <hr/>
41.48	<p>N. 89° 36' W., bet. secs. 18 and 19.</p> <p>Over rolling and broken terrain.</p> <p>Point for the ¼ sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
81.52	<p style="text-align: center;">T50N R74W S 18 1/4 ——— S 19 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, a well casing of windmill, bears N. 42° 54' W., 12.01 chs. dist.</p> <p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1986-87 field notes of the dependent resurvey, T. 50 N., R. 75 W.</p> <hr/>
40.725	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 1° 12' W., bet. secs. 17 and 18.</p> <p>Over rolling and broken terrain.</p> <p>Point for the ¼ sec. cor. of secs. 17 and 18, at proportionate distance, falls in previously cultivated field; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
81.45	<p style="text-align: center;">T50N R74W 1/4 S 18   S 17 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 17 lks. E. of fence extending SSE. and NNW.</p> <p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance, falls in previously cultivated field; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 7   S 8 ----- S 18   S 17 1999</p> <p>Set a steel fence post alongside the iron post.</p>
39.94	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 89° 36' W., bet. secs. 8 and 17.</p> <p>Over rolling terrain, gradually converging on fence.</p> <p>The ¼ sec. cor. of secs. 8 and 17, at intersection of fences extending N., E. and S. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T50N R74W S 8 1/4 ——— S 17 1999</p> <hr style="width: 30%; margin: auto;"/> <p>S. 85° 15' W., beginning new measurement.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over gently rolling terrain.
4.30	Wild Horse Creek, course N.
40.35	The cor. of secs. 7, 8, 17 and 18.
	S. 89° 53' W., bet. secs. 7 and 18.
	Over rolling terrain.
40.36	Point for the ¼ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W S 7 1/4 ——— S 18 1999</p>
	Set a steel fence post alongside the iron post.
	Cor. is located in abandoned fence extending N. and S.
79.46	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1986-87 field notes of the dependent resurvey, T. 50 N., R. 75 W.
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 30' W., bet. secs. 7 and 8.
	Over gently rolling terrain.
39.60	Wash, drains ENE.
40.72	Point for the ¼ sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W 1/4 S 7   S 8 1999</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
81.44	<p>Set a steel fence post alongside the iron post.</p> <p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 6</td><td>S 5</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div>	T50N R74W		S 6	S 5	<hr/>		S 7	S 8	1999	
T50N R74W											
S 6	S 5										
<hr/>											
S 7	S 8										
1999											
	<p>Set a steel fence post alongside the iron post.</p> <hr/>										
40.03	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 88° 26' W., bet. secs. 5 and 8.</p> <p>Over rolling terrain.</p> <p>Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T50N R74W</td></tr> <tr><td>S 5</td><td></td></tr> <tr><td>1/4</td><td><hr/></td></tr> <tr><td>S 8</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table> </div>	T50N R74W		S 5		1/4	<hr/>	S 8		1999	
T50N R74W											
S 5											
1/4	<hr/>										
S 8											
1999											
52.70	<p>Set a steel fence post alongside the iron post.</p> <p>Wild Horse Creek, course NNE.</p>										
80.06	<p>The cor. of secs. 5, 6, 7 and 8.</p> <hr/>										
	<p>S. 89° 21' W., bet. secs. 6 and 7.</p> <p>Over rolling and broken terrain.</p>										
40.00	<p>Point for the ¼ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.</p>										

Dependent Resurvey of the Subdivisional Lines,  
T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W S 6 1/4 ——— S 7 1999</p>
	Set a steel fence post alongside the iron post.
78.40	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1986-87 field notes of the dependent resurvey, T. 50 N., R. 75 W.
	From the cor. of secs. 5, 6, 7 and 8.
	N. 1° 04' E., bet. secs. 5 and 6.
7.00	Wild Horse Creek, course NW.
9.00	Wild Horse Creek, course NE.
15.00	Wild Horse Creek, course SW.
40.72	Point for the ¼ sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T50N R74W 1/4 S 6   S 5 1999</p>
	Set a steel fence post alongside the iron post.
81.58	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1998 field notes of the dependent resurvey, T. 51 N., R. 74 W.

## T. 50 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS

## GENERAL DESCRIPTION

The area embraced by this survey is situated in the central portion of Campbell County, approximately 10 miles west of Gillette, Wyoming. The terrain varies from gently rolling to broken, with the elevation ranging from about 4,300 feet to about 4,800 feet above sea level. The soil is primarily sandy loam. The vegetation consists of scattered sagebrush and native and domestic grasses.

Drainage of the area is provided by Wild Horse Creek which flows intermittently in a northwesterly direction through the township, aided by East Fork Wild Horse Creek, Kingsbury Creek and numerous draws. The majority of the township is utilized in large ranching operations with only a few inhabited homes scattered throughout the area. There are several active oil fields in the northwestern portion of the township and gas exploration has recently began with the staking of many new well locations.

The Montgomery, Force and Echeta county roads aided by numerous oil field and trail roads provide good access into the township. The Burlington Northern Santa Fe Railway traverses sections 1 and 12, extending in a southeasterly and northwesterly direction.




## CERTIFICATE OF SURVEY

2001

I, Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 24th day of March, 1997, I have dependently resurveyed the subdivisional lines, Township 50 North, Range 74 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JUL 30 2001

(Date)

  
(Cadastral Surveyor)

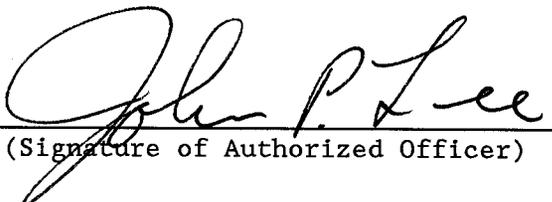
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of the subdivisional lines, Township 50 North, Range 74 West, Sixth Principal Meridian, Wyoming, executed by Joel T. Ebner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JUL 30 2001

(Date)

  
(Signature of Authorized Officer)