

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
6.60	Ridge, bears ESE. and WNW.
41.23	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W 1/4 S 17 S 16 1999</p> <p>Set a steel fence post alongside the iron post.</p>
82.46	<p>Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 8 S 9 ----- S 17 S 16 1999</p> <p>Set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>N. 88° 54' W., bet. secs. 9 and 16.</p> <p>Over rolling to broken terrain.</p>
9.80	Spur, slopes NW.
39.38	<p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 9 1/4 ——— S 16 1999</p>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
46.40	Ridge, bears ENE. and SW.
78.76	The cor. of secs. 8, 9, 16 and 17.
	<hr/> N. 0° 43' W., bet. secs. 8 and 9. Over rolling to broken terrain.
3.10	Ridge, bears ENE. and WSW.
41.17	Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R74W 1/4 S 8 S 9 1999 </div>
	Set a steel fence post alongside the iron post.
82.34	Point for the cor. of secs. 4, 5, 8 and 9, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R74W S 5 S 4 <hr style="width: 50%; margin: 0 auto;"/> S 8 S 9 1999 </div>
	Set a steel fence post alongside the iron post.
	<hr/> From the cor. of secs. 3, 4, 9 and 10. N. 89° 59' W., bet. secs. 4 and 9. Over rolling to broken terrain.
39.40	Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 4 1/4 ——— S 9 1999</p>
	<p>Set a steel fence post alongside the iron post.</p>
59.10	<p>Point for the W. 1/16 sec. cor. of secs. 4 and 9.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 4 W1/16 ——— S 9 1999</p>
78.80	<p>The cor. of secs. 4, 5, 8 and 9.</p>
	<p>N. 0° 18' W., bet. secs. 4 and 5.</p>
	<p>Over rolling to broken terrain.</p>
18.90	<p>Ridge, bears SSE. and NNW.</p>
41.17	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W 1/4 S 5 S 4 1999</p>
	<p>Set a steel fence post alongside the iron post.</p>
75.10	<p>Ridge, bears ENE. and WSW.</p>
83.12	<p>Point for the closing cor. of secs. 4 and 5, at intersection with the Thirteenth Standard Parallel North, at proportionate distance, falls in wash, 5 lks. wide, drains WNW.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, over a steel fence post, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T53N R74W S 33</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S 5 S 4 T52N R74W C C 1999</p> <p>From this point, the standard cor. of secs. 32 and 33, T. 53 N., R. 74 W., bears S. 89° 19' W., 14.56 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1996 field notes of the dependent resurvey, T. 53 N., R. 74 W.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 4 only, T. 52 N., R. 74 W., is at midpoint on the N. bdy. of sec. 4.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T53N R74W</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1/4 S 4 T52N R74W 1998</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 33, T. 53 N., R. 74 W., bears S. 88° 40' W., 15.75 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1996 field notes of the dependent resurvey, T. 53 N., R. 74 W.</p> <hr/> <p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the field notes of the dependent resurvey, T. 51 N., R. 74 W., executed concurrently under this same group.</p> <p>N. 7° 33' W., bet. secs. 31 and 32.</p> <p>Over rolling to broken terrain.</p> <p>44.91 Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W 1/4 S 31 S 32 1998</p>
	from which
	A juniper, 10 ins. diam., bears S. 60° E., 24 lks. dist., mkd. 1/4 S32 BT.
	A juniper, 4 ins. diam., bears S. 86° W., 10 lks. dist., mkd. X at breast height and BT at base.
	Set a steel fence post alongside the iron post.
	Cor. is located 2.6 chs. W. of fence extending SSE. and NNW.
67.365	Point for the N. 1/16 sec. cor. of secs. 31 and 32, falls on steep N. slope of small draw where it is impracticable to establish a permanent monument.
67.865	Point selected for the witness cor. to the N. 1/16 sec. cor. of secs. 31 and 32, on small spur, slopes SSW.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">WC T52N R74W N1/16 S 31 S 32 1998</p>
	Set a steel fence post alongside the iron post.
	Cor. is located on E. side of Mooney Draw, 5 lks. wide, drains SSE.
89.82	The cor. of secs. 29, 30, 31 and 32, at cor. of fences extending NE. and SSE. This position is in agreement with cor. tie shown on plat of survey of Fitch (previously named Daly) Road (vacated), by Jesse E. Spielman, Campbell County Surveyor, in 1916, and is accepted as the best available evidence of the original cor. position.
	At the corner point

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

<p>CHAINS</p>	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T52N R74W S 30 S 29 ----- S 31 S 32 1998 </p> <p>From this point, the easterly right-of-way monument to Station 66 of Fitch Road, bears S. 85° 14' E., 13.84 chs. dist., a broken sandstone, base portion firmly set 3 ins. below the surface of the ground, upper portion, 12x9x2 ins., lying loose, plainly mkd. CR 66 on a face.</p> <p>From this same point, the westerly right-of-way monument to Station 66 of Fitch Road, bears S. 80° 34' E., 12.79 chs. dist., a sandstone, firmly set, projecting 8x6x2 ins. above the ground, no mks. visible.</p> <p>From this same point, U.S. Coast and Geodetic Survey triangulation station FELIX, bears N. 61° 08' W., 7.24 chs. dist., monumented with a standard brass tablet, seated on an iron post, 3½ ins. diam., projecting 2 ins. above the ground, mkd. FELIX 1925 and a triangle.</p> <hr/> <p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 87° 07' W., bet. secs. 29 and 32.</p> <p>Over rolling to broken terrain.</p> <p>40.19 Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;"> T52N R74W S 29 1/4 ——— S 32 1999 </p> <p>80.38 The cor. of secs. 29, 30, 31 and 32.</p> <hr/>
---------------	---

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	S. 85° 11' W., bet. secs. 30 and 31.
	Over rolling to broken terrain.
4.70	Ridge, bears N. and S.
34.10	Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 30 1/4 ——— S 31 1998</p>
	Set a steel fence post alongside the iron post.
47.20	Thence along abandoned fence.
51.15	Point for the W. 1/16 sec. cor. of secs. 30 and 31.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 30 W1/16 ——— S 31 1998</p>
	Set a steel fence post alongside the iron post.
	Cor. is located on N. edge of wash, 20 lks. wide, drains NW.
68.75	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 29, 30, 31 and 32.</p>
	N. 6° 00' E., bet. secs. 29 and 30.
	Over rolling to broken terrain.
40.51	Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W 1/4 S 30 S 29 1999</p>
	Cor. is located on spur, slopes NW.
81.02	Point for the cor. of secs. 19, 20, 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 19 S 20 ----- S 30 S 29 1999</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
	From the cor. of secs. 20, 21, 28 and 29.
	N. 87° 04' W., bet. secs. 20 and 29.
	Over rolling to broken terrain.
5.90	Twentymile Creek, 80 lks. wide, course NW.
19.36	Point for the E. 1/16 sec. cor. of secs. 20 and 29.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 20 E1/16 ——— S 29 1999</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.
38.72	Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 20 1/4 ——— S 29 1999</p>
77.44	<p>Raise a mound of stone, 2½ ft. base, 2 ft. high, N. of the cor.</p> <p>The cor. of secs. 19, 20, 29 and 30.</p> <hr/>
	S. 85° 07' W., bet. secs. 19 and 30.
	Over rolling to broken terrain.
8.00	Ridge, bears NE. and SW.
39.06	<p>Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T52N R74W S 19 1/4 ——— S 30 1999</p>
	Set a steel fence post alongside the iron post.
49.80	Ridge, bears SE. and NW.
78.54	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 19, 20, 29 and 30.</p>
	N. 1° 48' W., bet. secs. 19 and 20.
	Over rolling to broken terrain.
2.80	Fence, bears NE. and SW.
5.30	Ridge, bears NE. and SW.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
20.155	<p>Point for the S. 1/16 sec. cor. of secs. 19 and 20.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S1/16 S 19 S 20 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located on spur, slopes NW.</p>
40.31	<p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W 1/4 S 19 S 20 1999</p> <p>Set a steel fence post alongside the iron post.</p>
45.00	<p>Wash, 40 lks. wide, drains NE.</p>
73.40	<p>Twentymile Creek, 3.0 chs. wide, course NW.</p>
80.62	<p>Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 18 S 17 ----- S 19 S 20 1999</p> <p>Set a steel fence post alongside the iron post.</p>
	<p>From the cor. of secs. 16, 17, 20 and 21.</p>
	<p>N. 87° 04' W., bet. secs. 17 and 20.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over rolling to broken terrain.
25.00	Ridge, bears ESE. and NW.
38.10	Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 17 1/4 ——— S 20 1999</p>
	Set a steel fence post alongside the iron post.
57.15	Point for the W. 1/16 sec. cor. of secs. 17 and 20.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 17 W1/16 ——— S 20 1999</p>
	Set a steel fence post alongside the iron post.
	Cor. is located on spur, slopes S.
76.20	The cor. of secs. 17, 18, 19 and 20.
	S. 86° 07' W., bet. secs. 18 and 19.
	Over rolling to broken terrain.
4.50	Twentymile Creek, 3.0 chs. wide, course NW.
38.21	Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T52N R74W S 18 1/4 ——— S 19 1999</p> <p>Set a steel fence post alongside the iron post.</p>
41.80	Ridge, bears SSE. and NNW.
77.13	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 1° 11' E., bet. secs. 17 and 18.</p> <p>Over rolling to broken terrain.</p>
28.20	Spur, slopes NW.
40.30	Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W 1/4 S 18 S 17 1999</p> <p>Set a steel fence post alongside the iron post.</p>
80.60	Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 7 S 8 ————— S 18 S 17 1999</p> <p>Set a steel fence post alongside the iron post.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	From the cor. of secs. 8, 9, 16 and 17.
	N. 88° 26' W., bet. secs. 8 and 17.
	Over rolling to broken terrain.
17.50	Ridge, bears ENE. and WSW.
39.52	Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R74W S 8 1/4 ——— S 17 1999 </div>
	Set a steel fence post alongside the iron post.
59.40	Wash, 2.4 chs. wide, drains SSW.
79.04	The cor. of secs. 7, 8, 17 and 18.
	S. 87° 16' W., bet. secs. 7 and 18.
	Over rolling to broken terrain.
0.90	Spur, slopes SSW.
39.44	Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R74W S 7 1/4 ——— S 18 1999 </div>
	Set a steel fence post alongside the iron post.
	Cor. is located 1.0 ch. W. of trail road extending SSE. and NNW.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
48.40	Ridge, bears SSE. and NNW.
59.16	<p>Point for the W. 1/16 sec. cor. of secs. 7 and 18.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W S 7 W1/16 ——— S 18 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 50 lks. E. of small wash, 5 lks. wide, drains SSW.</p>
70.10	Ridge, bears NNE. and SSW.
79.97	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0° 47' W., bet. secs. 7 and 8.</p> <p>Over rolling to broken terrain.</p>
25.50	Ridge, bears SE. and WNW.
36.60	Spur, slopes E.
40.29	<p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R74W 1/4 S 7 S 8 1999</p> <p>from which</p> <p style="text-align: center;">A juniper, 6 ins. diam., bears N. 3° E., 17 lks. dist., mkd. 1/4 S8 BT.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>A juniper, 3 ins. diam., bears S. 61° E, 74 lks. dist., mkd. X at breast height and BT at base.</p> <p>Set a steel fence post alongside the iron post.</p>										
75.90	Ridge, bears ESE. and WNW.										
80.58	<p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T52N R74W</td></tr> <tr><td>S 6</td><td>S 5</td></tr> <tr><td colspan="2">—</td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p> <hr/>	T52N R74W		S 6	S 5	—		S 7	S 8	1999	
T52N R74W											
S 6	S 5										
—											
S 7	S 8										
1999											
	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>N. 89° 43' W., bet. secs. 5 and 8.</p> <p>Over mountainous terrain.</p>										
24.80	Ridge, bears NE. and SW.										
39.52	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T52N R74W</td></tr> <tr><td>S 5</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 8</td><td></td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Set a steel fence post alongside the iron post.</p>	T52N R74W		S 5		1/4	—	S 8		1999	
T52N R74W											
S 5											
1/4	—										
S 8											
1999											
54.80	Wash, 50 lks. wide, drains S.										
79.04	The cor. of secs. 5, 6, 7 and 8.										

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	
	S. 88° 18' W., bet. secs. 6 and 7.
	Over rolling to broken terrain.
6.60	Ridge, bears ESE. and WNW.
39.54	Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W S 6 1/4 ——— S 7 1999</p>
	Set a steel fence post alongside the iron post.
	Cor. is located S. 40° W., 3.80 chs. dist., from cor. of fences extending N. and W.
53.20	Ridge, bears SE. and NW.
80.07	The cor. of secs. 5, 6, 7 and 8, on the W. bdy. of the Tp.
	From the cor. of secs. 5, 6, 7 and 8.
	N. 0° 49' W., bet. secs. 5 and 6.
	Over rolling to broken terrain.
37.10	Ridge, bears SSE. and NNW.
40.29	Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T52N R74W 1/4 S 6 S 5 1999</p>
	Set a steel fence post alongside the iron post.

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Cor. is located 80 lks. E. of trail road, on ridge, bears N. and SW.</p>
81.78	<p>Point for the closing cor. of secs. 5 and 6, at intersection with the Thirteenth Standard Parallel North, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;"> T53N R74W S 32 <hr style="width: 50px; margin: auto;"/> S 6 S 5 T52N R74W C C 1999 </p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard cor. of secs. 31 and 32, T. 53 N., R. 74 W., bears S. 89° 19' W., 14.18 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1996 field notes of the dependent resurvey, T. 53 N., R. 74 W.</p> <p>Cor. is located 2.0 chs. W. of wash, 10 lks. wide, drains SSE.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 5 only, T. 52 N., R. 74 W., is at midpoint on the N. bdy. of sec. 5.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T53N R74W <hr style="width: 50px; margin: auto;"/> 1/4 S 5 T52N R74W 1998 </p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 20 lks. W. of fence extending SE. and NW.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 32, T. 53 N., R. 74 W., bears S. 88° 19' W., 14.37 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1996 field notes of the dependent resurvey, T. 53 N., R. 74 W.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,
T. 52 N., R. 74 W., Sixth Principal Meridian, Wyoming

CHAINS

The point for the 1/4 sec. cor. of sec. 6 only, T. 52 N., R. 74 W., is at proportionate distance on the N. bdy. of sec. 6.

Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T53N R74W

1/4 S 6

T52N R74W

1998

Set a steel fence post alongside the iron post.

From this point, the standard 1/4 sec. cor. of sec. 31, T. 53 N., R. 74 W., bears S. 88° 19' W., 13.88 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1996 field notes of the dependent resurvey, T. 53 N., R. 74 W.

GENERAL DESCRIPTION

The area embraced by this survey is situated in Campbell County, approximately 18 miles northwest of Gillette, Wyoming. The terrain varies from rolling and broken to mountainous, with the elevation ranging from about 4,120 feet above sea level, where Twentymile Creek crosses the west boundary, to about 4,760 feet above sea level along the divide between Twentymile Creek and Wild Horse Creek. The soil varies from gravelly loam to rocky clay with areas of exposed scoria. Vegetation consists of a light to moderate growth of sagebrush and native grasses throughout, with scattered areas of juniper in the higher elevations and occasional cottonwood in the lower areas.

Primary drainage is provided by Twentymile Creek, which courses northwesterly through the southwestern portion of the township. The northern and eastern portions are drained by tributaries to Wildcat Creek, which courses northeasterly beyond the township. The area is utilized for stock grazing purposes and oil and gas exploration and development continues in the area.


Access is provided by several oil field roads leading into, and numerous trail roads extending throughout, the township.

CERTIFICATE OF SURVEY

I, Richard A. Kohler, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 27th day of May, 1998, I have dependently resurveyed the west boundary and the subdivisional lines, Township 52 North, Range 74 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

AUG 20 2001

(Date)



(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of the west boundary and the subdivisional lines, Township 52 North, Range 74 West, Sixth Principal Meridian, Wyoming, executed by Richard A. Kohler, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

AUG 20 2001

(Date)

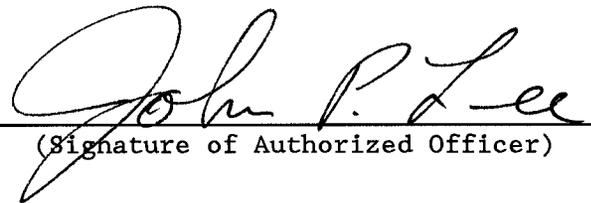

(Signature of Authorized Officer)