

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE
DEPENDENT RESURVEY
OF
LOTS 37 AND 38, AND TRACT 39,
PORTIONS OF THE EAST AND NORTH BOUNDARIES,
AND
SUBDIVISIONAL LINES,
AND THE
SUBDIVISION OF SECTIONS 1 AND 2,
TOWNSHIP 14 NORTH, RANGE 107 WEST,
OF THE SIXTH PRINCIPAL MERIDIAN,
IN THE STATE OF WYOMING.

EXECUTED BY

DONNA S. MALLECK

CADASTRAL SURVEYOR


Under Special Instructions dated MAY 17, 2001, approved MAY 17, 2001, which provided for the surveys included under Group Number 691, and assignment instructions dated MAY 17, 2001.

Survey commenced JUNE 19, 2001

Survey completed JULY 31, 2001

INDEX DIAGRAM

Township 14 North, Range 107 West

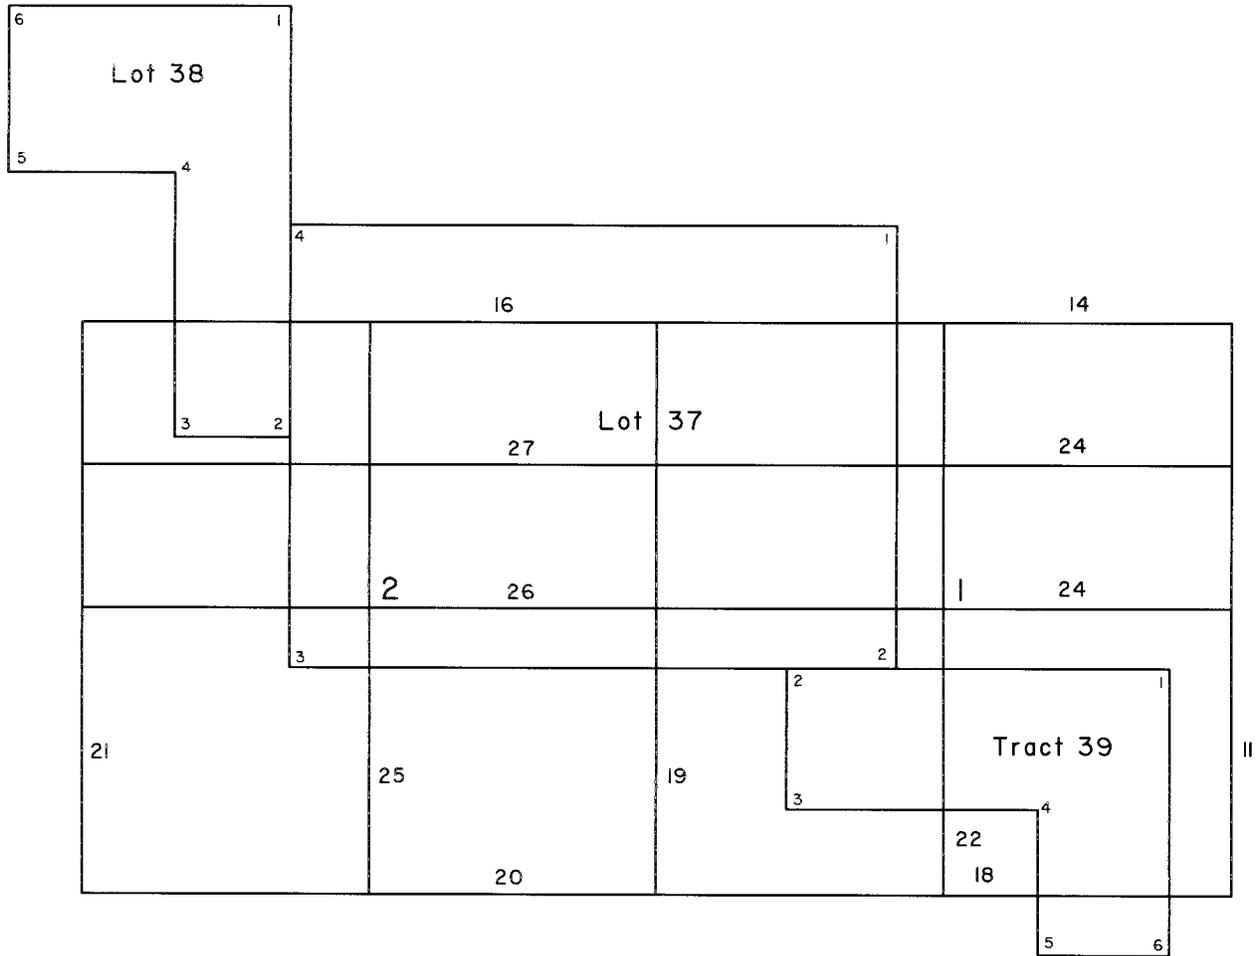

Dependent Resurvey of Lot 37 Page 2
Dependent Resurvey of Lot 38 Page 5
Dependent Resurvey of Tract 39 Page 8

T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS

The following field notes are those of the dependent resurvey of lots 37 and 38, and Tract 39, portions of the east and north boundaries, and subdivisional lines, and the subdivision of sections 1 and 2, Township 14 North, Range 107 West, Sixth Principal Meridian, Wyoming.

The history of surveys pertaining to this resurvey is as follows:

Frank Buckley surveyed the exterior boundaries and subdivisional lines in 1882. These surveys were subsequently canceled. John F. H. Stahle surveyed certain private land claims, and independently resurveyed the exterior boundaries and subdivisional lines in 1901-02. Ruban W. Riley resurveyed and revised Lot 46 as Tracts 39 and 47 in 1926.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 691, Wyoming, dated May 17, 2001.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data was thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed with TRIMBLE Model 4700 Global Positioning System (GPS) receivers. The directions of all lines refer to the true meridian, as determined by GPS observations. GPS control network and supporting data are contained in the official group file.

Detectable Electronically Energized Particles (DEEP-1 TM) were buried as memorials at certain corner monuments. The DEEP-1 is composed of strontium encased in a color coded plastic container. The unites are 1 inch in diameter, 2½ inches long, weigh 2½ ounces, and are magnetically detectable to an average depth of 8 feet.

The geographic position of the corner of sections 1, 2, 11 and 12, based on NAD 83 (1993) and determined by Global Positioning System methods is:

T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Latitude 41° 12' 56.837" N., Longitude 109° 25' 37.182" W.
	The mean magnetic declination of 12¼° E.
	<p style="text-align: center;">Dependent Resurvey of Lot 37, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p>
	<p style="text-align: center;">(Restoring the resurvey executed by John F. H. Stahle in 1901-02)</p>
	<p>Beginning at Cor. No. 1, Lot 37, in sec. 36, T. 15 N., R. 107 W., monumented with a sandstone, 20x11x6 ins., firmly set 12 ins. in the ground, dimly mkd. 1 on SW. face, with a mound of stone, 3 ft. base, 1 ft. high, E. of the cor.</p>
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T15N R107W S 36 — 1 — LOT 37 </p>
	2001
	Bury the 1902 resurvey cor. stone alongside the iron post.
	S. 0° 05' E., on line 1-2, Lot 37.
	Over rolling terrain.
	14.31 Point for the closing cor. of secs. 1 and 36, Tps. 14 and 15 N., R. 107 W., hereinafter described.
	34.45 Point for the closing subdivision of sec. cor. on the E. and W. center line of the NW¼ of sec. 1, hereinafter described.
	54.56 Intersect the E. and W. center line of sec. 1, at a point from which the center ¼ sec. cor. of sec. 1, bears S. 89° 36' E., 4.60 chs. dist., hereinafter described.
	56.00 Currant Creek, course NW.

Dependent Resurvey of Lot 37,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
60.08	Point for Cor. No. 2, Lot 37, at proportionate distance, on line 1-2, Tract 39; there is no remaining evidence of the original cor. Point not monumented.
	<hr/>
	N. 89° 50' W., on line 2-3, Lot 37, identical in part with line 2-1, Tract 39.
	Over rolling terrain.
5.50	Trail road, bears SE. and NW.
20.05	Cor. No. 2, Tract 39, monumented with an iron post, 36 ins. long, 1 in. diam., loosely set 18 ins. in the ground, with a limestone, 20x12x2 ins., firmly set 10 ins. in the ground alongside, in a mound of stone, 3 ft. base to top, plainly mkd. 2/39 on S. face, with brass cap mkd.
	T14N R107W S 1 2 TR 39 1924
	Reset the 1924 iron post 14 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top. Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.
	<hr/>
	S. 89° 54' W., on line 2-3, Lot 37, beginning new measurement
	Over rolling terrain.
15.62	Point for the closing cor. of secs. 1 and 2, hereinafter described.
47.50	Sweetwater County Road Nos. 33 and 38, bears SE. and NW.
55.24	Intersect the N. and S. center line of sec. 2, at a point from which the center 1/4 sec. cor. of sec. 2, bears N. 0° 01' E., 6.11 chs. dist., hereinafter described.
60.05	Cor. No. 3, Lot 37, monumented with a sandstone, 27x12x4 ins., firmly set 18 ins. in the ground, plainly mkd. 3/37 on N. face.
	At the corner point

Dependent Resurvey of Lot 37,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W LOT 37 3 S 2</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone alongside the iron post.</p> <p>Cor. is located 1.80 chs. W. of draw, drains N.</p> <hr/> <p>N. 0° 20' E., on line 3-4, Lot 37.</p> <p>Over rolling terrain.</p>
6.16	Intersect the E. and W. center line of sec. 2, at a point from which the center 1/4 sec. cor. of sec. 2, bears S. 89° 34' E., 4.78 chs. dist., hereinafter described.
26.15	Point for the closing subdivision of sec. cor. on the E. and W. center line of the NW¼ of sec. 2, hereinafter described.
30.00	Sweetwater County Road Nos. 33 and 38, bears SE. and NW.
34.94	Cor. No. 2, Lot 38, monumented with a sandstone, 24x18x4 ins., firmly set 18 ins. in the ground, plainly mkd. 2/38 on NW. face.
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W LOT 38 2 LOT 37 S 2</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <hr style="width: 20%; margin: 0 auto;"/>

Dependent Resurvey of Lot 37,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS							
	N. 0° 07' E., beginning new measurement, on line 3-4, Lot 37, identical in part with line 1-2, Lot 38. Over rolling terrain.						
11.27	Intersect the line bet. Tps. 14 and 15 N., R. 107 W., at a point from which the 1/4 sec. cor. of secs. 2 and 35, bears S. 89° 43' E., 4.60 chs. dist.						
18.00	Trails road, bears SE. and NW.						
23.50	Currant Creek, course NW.						
24.95	Point for Cor. No. 4, Lot 37, in sec. 35, T. 15 N., R. 107 W., at proportionate distance, on line 1-2, Lot 38; falls in yard area of Currant Creek Ranch, there is no remaining evidence of the original cor. Point not monumented.						
	<hr/>						
	N. 89° 49' E., on line 4-1, Lot 37. Over rolling terrain.						
79.75	Cor. No. 1, Lot 37, in sec. 36, T. 15 N., R. 107 W.						
	<hr/>						
	Dependent Resurvey of Lot 38, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming						
	<hr/>						
	(Restoring the resurvey executed by John F. H. Stahle in 1902)						
	<hr/>						
	From Cor. No. 1, Lot 38, in sec. 35, T. 15 N., R. 107 W., monumented with a sandstone, 26x16x3 ins., firmly set 15 ins. in the ground, plainly mkd. 1/38 on SW. face.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.						
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T15N R107W</td></tr> <tr><td style="text-align: center;">S 35</td></tr> <tr><td style="text-align: center;">┌</td></tr> <tr><td style="text-align: center;">1</td></tr> <tr><td style="text-align: center;">└</td></tr> <tr><td>LOT 38</td></tr> </table>	T15N R107W	S 35	┌	1	└	LOT 38
T15N R107W							
S 35							
┌							
1							
└							
LOT 38							
	2001						

Dependent Resurvey of Lot 38,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, NE. of the cor.
	S. 0° 07' W., on line 1-2, Lot 38.
	Over rolling terrain.
34.92	The point for Cor. No. 4, Lot 37.
36.40	Currant Creek, course NW.
41.90	Trail road, bears SE. and NW.
48.60	Intersect the line bet. Tps. 14 and 15 N., R. 107 W., at a point from which the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, bears S. 89° 43' E., 4.60 chs. dist., hereinafter described.
59.87	Cor. No. 2, Lot 38.
	N. 89° 58' W., on line 2-3, Lot 38.
	Over rolling terrain.
4.50	Sweetwater County Road Nos. 33 and 38, bears SE. and NW.
19.93	Point for Cor. No. 3, Lot 38, at proportionate measurement by the method grant boundary; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T14N R107W S 2 3 LOT 38 </div>
	2001
	Set a steel fence post alongside the iron post.
	N. 0° 02' E., on line 3-4, Lot 38.
	Over rolling terrain.
11.35	Point for the closing cor. of secs. 2 and 35, Tps. 14 and 15 N., R. 107 W., hereinafter described.

Dependent Resurvey of Lot 38,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
27.00	Sweetwater County Road Nos. 33 and 38, bears SE. and NW.
32.50	Currant Creek, course NW.
39.86	Point for Cor. No. 4, Lot 38, in sec. 35, T. 15 N., R. 107 W., at proportionate measurement by the method grant boundary; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, supported by a mound of stone, 6 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T15N R107W ┌───┐ 4 S 35 LOT 38 └───┘ 2001 </div>
	Cor. is located on a rounded spur, slopes W.
	N. 89° 58' W., on line 4-5, Lot 38. Over gently rolling terrain, across bottom land.
17.00	Currant Creek, course WNW.
19.93	Cor. No. 5, Lot 38, in sec. 34, T. 15 N., R. 107 W., monumented with a broken and weathered sandstone, 30x16x3 ins., firmly set 21 ins. in the ground, no mks. visible. This position is accepted as the best available evidence of the original cor. position. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T15N R107W ┌───┐ LOT 38 S 34 5 └───┘ 2001 </div>
	Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.

Dependent Resurvey of Lot 38,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 0° 03' E., on line 5-6, Lot 38.</p>
0.40	<p>Currant Creek, course W.</p>
19.94	<p>Cor. No. 6, Lot 38, in sec. 34, T. 15 N., R. 107 W., monumented with a limestone, 24x18x4 ins., firmly set 16 ins. in the ground, plainly mkd. 6/38 on NE. face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R107W</p> <p style="text-align: center;">S 34 $\overline{6}$ LOT 38</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 56' E., on line 6-1, Lot 38.</p> <p>Over rolling terrain.</p>
39.95	<p>Cor. No. 1, Lot 38, in sec. 35, T. 15 N., R. 107 W.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of Tract 39, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the resurvey executed by Ruban W. Riley in 1924)</p> <hr/> <p>From Cor. No. 1, Tract 39, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above the ground, with a sandstone, firmly set, projecting 12x6x3 ins. above the ground alongside, no mks. visible, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W</p> <p style="text-align: center;">S 1</p> <p style="text-align: center;">— 1 </p> <p style="text-align: center;">39 </p> <p style="text-align: center;">1924</p>

Dependent Resurvey of Tract 39,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 89° 50' W., on line 1-2, Tract 39. Over rolling terrain.
35.50	Point for the closing subdivision of sec. cor. on the N. and S. center line of sec. 1, hereinafter described.
37.00	Currant Creek, course NW.
40.10	The point for Cor. No. 2, Lot 37.
45.60	Trail road, bears SE. and NW.
60.15	Cor. No. 2, Tract 39.
<hr/>	
	S. 0° 04' E., on line 2-3, Tract 39. Over rolling terrain.
20.03	Cor. No. 3, Tract 39, monumented with an iron post, 1 in. diam., firmly set, projecting 23 ins. above the ground, with a weathered limestone, firmly set, projecting 18x12x5 ins., above the ground alongside, no mks. visible, with brass cap mkd.
	T14N R107W TR 39 S 1 3 _____
	1924
<hr/>	
	S. 89° 50' E., on line 3-4, Tract 39. Over gently rolling terrain.
24.64	Point for the closing subdivision of sec. cor. on the N. and S. center line of sec. 1, hereinafter described.
40.06	Cor. No. 4, Tract 39, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, in a collar of stone, with brass cap mkd.
	T14N R107W _____ TR 39 S 1 4
	1924
<hr/>	

Dependent Resurvey of Tract 39,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>S. 0° 10' W., on line 4-5, Tract 39.</p> <p>Over gently rolling mesa.</p>
14.24	The closing cor. of secs. 1 and 12, hereinafter described.
20.11	<p>Cor. No. 5, Tract 39, monumented with an iron post, 1 in. diam., firmly set, projecting 22 ins. above the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R107W TR 39 5 S 12</p> <p style="text-align: center;">1924</p> <p>Cor. is located 48 lks. W. of a rock ledge, 6 ft. high, bears N. and S.</p> <hr/>
	<p>S. 89° 59' E., on line 5-6, Tract 39.</p> <p>Over broken terrain across ravine.</p>
17.00	Trail road, bears SE. and NW.
20.04	<p>Cor. No. 6, Tract 39, identical with Cor. No. 3, Tract 47, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R107W TR 39 TR 47 6 3 S 12</p> <p style="text-align: center;">1924</p> <p>From this point, the closing cor. of secs. 1 and 6, T. 14 N., Rs. 106 and 107 W., to line 3-4, Tract 47, bears S. 89° 58' E., 4.43 chs. dist., hereinafter described.</p> <hr/>
	<p>N. 0° 04' E., on line 6-1, Tract 39, identical in part with line 2-3 of Tract 47.</p>
17.00	Trail road, bears SE. and NW.

Dependent Resurvey of Tract 39,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
20.04	Cor. No. 2, Tract 47, monumented with an iron post, 1 in. diam., firmly set flush with the surface of the ground, with brass cap mkd.
	$\begin{array}{r} \text{T14N R107W} \\ \text{TR 39} \left \begin{array}{l} \text{S 1} \\ \text{2} \\ \text{TR 47} \end{array} \right. \end{array}$
	1924
	Set a steel fence post alongside the iron post.
	Cor. is located in a hay meadow, 1.80 chs. W. of Currant Creek, course NW.
	<hr style="width: 20%; margin: auto;"/>
	N. 0° 09' E., on line 6-1, Tract 39, beginning new measurement.
3.00	Currant Creek, course NW.
20.05	Cor. No. 1, Tract 39.
	<hr/>
	<p style="text-align: center;">Dependent Resurvey, Portion of the East Boundary, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p>
	<hr/>
	<p style="text-align: center;">(Restoring the resurvey executed by John F. H. Stahle in 1902)</p>
	<hr/>
	From the point for the closing cor. of secs. 1 and 6, T. 14 N., Rs. 106 and 107 W., at intersection with line 1-2, Tract 47, there is no remaining evidence of the 1902 resurvey monument.
	Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, in a collar of stone, with brass cap mkd.
	$\begin{array}{r} \text{T14N} \\ \text{R106W R107W} \\ \text{CC} \\ \text{S 1} \left \text{S 6} \right. \\ \hline \text{TR 47} \end{array}$
	2001
	Cor. is located in a hay meadow, 2.60 chs. E. of Currant Creek, course NW.

Dependent Resurvey, Portion of the East Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS

From this point, Cor. No. 1, Tract 47, Tp. 14 N., R. 106 W., bears EAST, 75.74 chs. dist., monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, with brass cap erroneously (the 1924 record mks. for cor. No. 1, Tract 47 are omitted) mkd. T14N R106W S6 2 TR48 1924.

At corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, atop a white "DEEP-1" magnetic marker, with brass cap mkd.

T14N R106W	
S	6
1	
TR 47	

2001

Bury the 1924 iron post monument and set a steel fence post alongside the iron post.

From this same point, the closing cor. of secs. 7 and 12, T. 14 N., Rs. 106 and 107 W., to line 3-4, Tract 47, bears S. 0° 01' E., 20.05 chs. dist., monumented with a sandstone, 25x12x3 ins., firmly set 13 ins. in the ground, plainly mkd. 47 on N. face, 6 notches on E. edge, and CC 47 on S. face, with a mound of stone, 3 ft. base, 2 ft. high, S. of the cor.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T14N	
TR 47	
R107W	R106W
S 12	S 7
CC	

2001

Bury the 1902 resurvey cor. stone alongside the iron post.

From this same point, Cor. No. 2, Tract 47, bears WEST, 4.40 chs. dist.

N. 0° 01' W., bet. secs. 1 and 6.

Dependent Resurvey, Portion of the East Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
25.38	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with a sandstone, 20x10x2 ins., firmly set 16 ins. in the ground, plainly mkd. 1/4 on W. face, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W R106W 1/4 S 1 S 6</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 10' E., beginning new measurement.</p> <p>Over rolling terrain.</p>
20.05	<p>Point for the N. 1/16 sec. cor. of secs. 1 and 6.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W R106W N 1/16 S 1 S 6</p> <p style="text-align: center;">2001</p> <p>Raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.</p>
40.10	<p>The cor. of Tps. 14 and 15 N., Rs. 106 and 107 W., monumented with a weathered limestone, 20x15x3 ins., firmly set 20 ins. in the ground, dimly mkd. 6 notches on N. edge and 6 notches on S. edge, with a mound of stone, 3 ft. base, 2 ft. high, S. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey, Portion of the East Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>T15N R107W R106W S 36 S 31 ----- S 1 S 6 T14N</p> <p>2001</p>
	<p>from which</p> <p style="padding-left: 40px;">A cedar, 11 ins. diam, bears N. 68° W., 64 lks. dist., mkd. T14N R106W S6 BT.</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr/> <p style="text-align: center;">Dependent Resurvey, Portion of the North Boundary, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the resurvey executed by John F. H. Stahle in 1902)</p> <hr/> <p>From the cor. of Tps. 14 and 15 N., Rs. 106 and 107 W. N. 89° 24' W., bet. secs. 1 and 36.</p> <p>Over rolling terrain.</p> <p>39.99 The 1/4 sec. cor. of secs. 1 and 36, Tps. 14 and 15 N., R. 107 W., monumented with a sandstone, 24x14x3 ins., firmly set 16 ins. in the ground, dimly mkd. 1/4 on N. face., with a mound of stone, 3 ft. base, 2 ft. high, N., of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.</p>
	<p>T15N R107W S 36 1/4 ——— S 1 T14N</p> <p>2001</p>

Dependent Resurvey, Portion of the North Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS							
	Bury the 1902 resurvey cor. stone alongside the iron post.						
	<hr/>						
	N. 89° 36' W., beginning new measurement.						
	Over rolling terrain.						
4.62	Point for the closing cor. of secs. 1 and 36, at intersection with line 1-2, Lot 37.						
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.						
	<div style="text-align: center;"> <p>T15N R107W</p> <table border="1" style="margin: auto;"> <tr> <td style="padding: 0 5px;">LOT 37</td> <td style="padding: 0 5px;">S 36</td> <td style="padding: 0 5px;">CC</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;">S 1</td> <td style="padding: 0 5px;"></td> </tr> </table> <p>T14N</p> <p>2001</p> </div>	LOT 37	S 36	CC		S 1	
LOT 37	S 36	CC					
	S 1						
	Set a steel fence post alongside the iron post.						
4.64	The original closing cor. of secs. 1 and 36, to line 1-2, Lot 37, monumented with a sandstone, 24x12x3 ins., loosely set 3 ins. in the ground, plainly mkd. CC on the SW. face, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor. Add the mks. AM and bury the original cor. stone in place, 12 ins. below the surface of the ground.						
	<hr/>						
	N. 89° 43' W., beginning new measurement.						
	Over rolling terrain.						
35.27	Point for the cor. of secs. 1, 2, 35 and 36, at proportionate distance.						
	Set an iron post, 28 ins. long, 2½ ins. diam., 7 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base to top, with brass cap mkd.						
	<div style="text-align: center;"> <p>T15N R107W</p> <table border="1" style="margin: auto;"> <tr> <td style="padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td style="padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> </table> <p>T14N</p> <p>2001</p> </div>	S 35	S 36	S 2	S 1		
S 35	S 36						
S 2	S 1						

Dependent Resurvey, Portion of the North Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 1.20 chs. W. of ravine, drains SW.</p> <hr/> <p>N. 89° 43' W., bet. secs. 2 and 35.</p> <p>Over rolling terrain.</p>
26.00	Currant Creek, course WNW.
37.50	Trail road, bears SE. and NW.
39.90	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T15N R107W S 35 1/4 ——— S 2 T14N 2001</p>
44.50	Intersect line 3-4, Lot 37, identical with line 1-2, Lot 38. Point not monumented.
56.40	Sweetwater County Road Nos. 33 and 38, bears NNE. and SSW.
64.45	<p>Point for the closing cor. of secs. 2 and 35, at intersection with line 3-4, Lot 38.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R107W CC — S 35 LOT 38 S 2 T14N 2001</p> <p>Set a steel fence post alongside the iron post.</p>

Dependent Resurvey, Portion of the North Boundary,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>64.48 The original closing cor. of secs. 2 and 35, Tps. 14 and 15 N., R. 107 W., monumented with a sandstone, 15x10x3 ins., firmly set 8 ins. in the ground, dimly mkd. 6 grooves on N. face, 6 grooves on S. face and CC on W. face, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor. Add the mks. AM and bury the stone in place, 3 ins. below the surface of the ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 45' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>15.67 The cor. of secs. 2, 3, 34 and 35, monumented with a sandstone, 18x14x3 ins., firmly set 15 ins. in the ground, plainly mkd. 2 notches on E. edge and 4 notches on W. edge, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T15N</td> <td style="padding: 0 5px;">R107W</td> </tr> <tr> <td style="padding: 0 5px;">S 34</td> <td style="padding: 0 5px;">S 35</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 5px;">S 3</td> <td style="border-top: 1px solid black; padding: 0 5px;">S 2</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">T14N</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">2001</td> </tr> </table> </div> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr style="width: 80%; margin: 10px auto;"/> <div style="text-align: center; margin: 10px auto;"> <p>Dependent Resurvey, Portion of the Subdivisional Lines, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p> <hr style="width: 80%; margin: 10px auto;"/> <p>(Restoring the resurvey executed by John F. H. Stahle in 1902)</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the original closing cor. of secs. 1 and 12, at intersection with line 4-5, Tract 39, monumented with a weathered and broken sandstone, 15x3 ins., firmly set, projecting 10 ins. above the surface of the ground, plainly mkd. 39 on W. face. with an imbedded mound of stone, 3 ft. diam., W. of the cor.</p> <p>At the corner point</p> </div>	T15N	R107W	S 34	S 35	S 3	S 2	T14N		2001	
T15N	R107W										
S 34	S 35										
S 3	S 2										
T14N											
2001											

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W CC $\frac{S \ 1}{S \ 12}$ TR 39</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <p>From this point, Cor. No. 5, Tract 39, bears S. 0° 10' W., 5.87 chs. dist.</p> <p>N. 89° 53' W., bet. secs. 1 and 12.</p> <p>Over gently rolling terrain.</p>
15.36	<p>The 1/4 sec. cor. of secs. 1 and 12, monumented with a sandstone, 24x8x4 ins., firmly set 18 ins. in the ground, plainly mkd. 1/4 on N. face, with a mound of stone, 2 ft. base, 2 ft. high, N. of the cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W S 1 1/4 ——— S 12</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>
39.99	<p>N. 89° 50' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 18x10x3 ins., firmly set 15 ins. in the ground, plainly mkd. 1 notch on N. edge and 3 notches on E. edge, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS									
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T14N</td><td>R107W</td></tr> <tr><td>S 2</td><td>S 1</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 11</td><td>S 12</td></tr> </table> <p>2001</p> </div> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr/>	T14N	R107W	S 2	S 1	<hr/>		S 11	S 12
T14N	R107W								
S 2	S 1								
<hr/>									
S 11	S 12								
	<p>N. 0° 32' W., bet. secs. 1 and 2.</p>								
	<p>Over gently rolling terrain.</p>								
34.06	<p>The original closing cor. of secs. 1 and 2, monumented with a limestone, 17x11x7 ins., firmly set 11 ins. in the ground, plainly mkd. CC on N. face. Add the mks. AM and bury the original cor. stone in place, 3 ins. below the surface of the ground.</p> <hr/>								
	<p>N. 0° 23' E., beginning new measurement.</p>								
	<p>Over gently rolling terrain.</p>								
0.15	<p>Point for the closing cor. of secs. 1 and 2, at intersection with line 2-3, Lot 37.</p>								
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>								
	<div style="text-align: center;"> <table border="1"> <tr><td>T14N</td><td>R107W</td></tr> <tr><td colspan="2">LOT 37</td></tr> <tr><td>S 2</td><td>S 1</td></tr> <tr><td colspan="2">CC</td></tr> </table> <p>2001</p> </div>	T14N	R107W	LOT 37		S 2	S 1	CC	
T14N	R107W								
LOT 37									
S 2	S 1								
CC									
5.89	<p>Point for the 1/4 sec. cor. of secs. 1 and 2.</p>								
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, supported by a mound of stone, 3 ft. base to top, with brass cap mkd.</p>								

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T14N R107W 1/4 S 2 S 1</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post alongside the iron post.</p>
21.00	Trail road, bears SE. and NW.
25.96	Point for the N. 1/16 sec. cor. of secs. 1 and 2.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the the ground, with brass cap mkd.
	<p style="text-align: center;">T14N R107W N 1/16 S 2 S 1</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in an irrigated hay meadow.</p>
29.60	Currant Creek, course NW.
46.06	The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp.
	<hr/> <p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 89° 49' W., bet. secs. 2 and 11.</p> <p>Over rolling terrain.</p>
35.80	Sweetwater County Road Nos. 33 and 38, bears NNE. and SSW.
39.95	The 1/4 sec. cor. of secs. 2 and 11, monumented with a sandstone, 15x15x3 ins., firmly set 9 ins. in the ground, plainly mkd. 1/4 on N. face.
	<p>from which the 1902 resurvey bearing tree</p> <p style="padding-left: 40px;">A cedar, 18 ins. diam, bears S. 40° W., 29 lks. dist., no mks. visible on the partially healed blaze. (1902 record: 12 ins. diam., bears S. 37¾° W., 28 lks. dist.)</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W S 2 1/4 ——— S 11</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89° 43' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
40.26	<p>The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 18x12x4 ins., firmly set 13 ins. in the ground, plainly mkd. 2 notches on E. edge and 5 notches on S. edge.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W S 3 S 2 ——— ——— S 10 S 11</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post. Raise a mound of stone, 2 ft. base, 2 ft. high, N. of the cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 02' E., bet. secs. 2 and 3.</p> <p>Over rolling terrain.</p>
40.23	<p>The 1/4 sec. cor. of secs. 2 and 3, monumented with a sandstone, 18x18x3 ins., firmly set 12 ins. in the ground, dimly mkd. 4 on W. face, with a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W 1/4 S 3 S 2</p> <p style="text-align: center;">2001</p> <p>Bury the 1902 resurvey cor. stone and set a steel fence post alongside the iron post.</p> <p>Cor. is located approximately 30 lks. W. of draw, drains N.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 01' E., beginning new measurement.</p> <p>Over rolling terrain.</p>
19.87	<p>Point for the N. 1/16 sec. cor. of secs. 2 and 3.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107 W N 1/16 S 3 S 2</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.</p>
39.81	<p>The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">Subdivision of Section 1, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the 1/4 sec. cor. of secs. 1 and 12.</p> <p>N. 0° 03' W., on the N. and S. center line of sec. 1.</p> <p>Over rolling terrain.</p>

Subdivision of Section 1,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
14.25	<p>Point for the closing subdivision of sec. cor. at intersection with line 3-4, Tract 39.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14N R107W TR 39 C ----- CC S 1 C</p> <p>2001</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, Cor. No. 4, Tract 39, bears S. 89° 50' E., 15.42 chs. dist.</p>
29.30	Trail road, bears SE. and NW.
30.90	Currant Creek, course Northerly along line from E.
33.50	Leave Currant Creek, course NW., from S.
34.29	<p>Point for the closing subdivision of sec. cor. at intersection with line 1-2, Tract 39.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14N R107W C S 1 CC ----- C TR 39</p> <p>2001</p> </div> <p>From this point, the point for Cor. No. 2, Lot 37, on line 1-2 of Tract 39, bears N. 89° 50' W., 4.60 chs. dist.</p>
39.79	<p>Point for the center 1/4 sec. cor. of the sec. 1, at intersection with the E. and W. center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 1,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T14N R107W C 1/4 S 1 2001 Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1 ft. high, W. of the cor.
59.91	Point for the center N. 1/16 sec. cor. of sec. 1. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T14N R107W C N1/16 S 1 C 2001 Set a steel fence post alongside the iron post.
80.04	The 1/4 sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp. <hr/> From the 1/4 sec. cor. of secs. 1 and 6, on the E. bdy. of the Tp. N. 89° 36' W., on the E. and W. center line of sec. 1. Over rolling terrain.
39.84	The center 1/4 sec. cor. of the sec. 1.
44.44	Intersect line 1-2, Lot 37, at a point from which the point for Cor. No. 2, Lot 37, on line 1-2, Tract 39, bears S. 0° 05' E., 5.52 chs. dist. Point not monumented.
46.50	Currant Creek, course NW.
57.50	Trail road, bears SE. and NW.
80.06	The 1/4 sec. cor. of secs. 1 and 2. <hr/> From the N. 1/16 sec. cor. of secs. 1 and 6, on the E. bdy. of the Tp.

Subdivision of Section 1,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 89° 30' W., on the E. and W. center line of the NE¼ of sec. 1. Over rolling terrain.</p>
39.92	<p>The center N. 1/16 sec. cor. of sec. 1.</p> <hr/>
	<p>N. 89° 40' W., on the E. and W. center line of the NW¼ of sec. 1. Over rolling terrain.</p>
4.61	<p>Point for the closing subdivision of sec. cor. at intersection with line 1-2, Lot 37.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W LOT 37 N $\frac{CC}{S \quad 1}$ N 2001</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, Cor. No. 1, Lot 37, bears N. 0° 05' W., 34.45 chs. dist.</p>
35.50	<p>Currant Creek, course NW.</p>
40.07	<p>The N. 1/16 sec. cor. of secs. 1 and 2.</p> <hr/> <p style="text-align: center;">Subdivision of Section 2, T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming</p> <hr/> <p>From the 1/4 sec. cor. of secs. 2 and 11. Over rolling terrain.</p> <p>N. 0° 01' E., on the N. and S. center line of sec. 2.</p>
34.01	<p>Intersect line 2-3, Lot 37, at a point from which Cor. No. 3, bears S. 89° 54' W., 4.81 chs. dist. Point not monumented.</p>
40.12	<p>Point for the center 1/4 sec. cor. of the sec. 1, at intersection with the E. and W. center line.</p>

Subdivision of Section 2,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W</p> <p style="text-align: center;">C 1/4 S 2</p> <p style="text-align: center;">2001</p>
	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.</p>
48.00	Sweetwater County Road Nos. 33 and 38, bears SE. and NNW.
60.13	Point for the center N. 1/16 sec. cor. of sec. 2.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R107W</p> <p style="text-align: center;">C</p> <p style="text-align: center;">N 1/16 S 2</p> <p style="text-align: center;">C</p> <p style="text-align: center;">2001</p>
	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.</p>
80.19	The 1/4 sec. cor. of secs. 1 and 36, on the W. bdy. of the Tp.
	<hr/> <p>From the 1/4 sec. cor. of secs. 1 and 2.</p> <p>N. 89° 34' W., on the E. and W. center line of sec. 2.</p> <p>Over rolling terrain.</p>
33.50	Sweetwater County Road Nos. 33 and 38, bears SE. and NW.
39.66	The center 1/4 sec. cor. of sec. 2.
44.44	Intersect line 3-4, Lot 37, at a point from which Cor. No. 3, bears S. 0° 02' W., 6.16 chs. dist. Point not monumented.
79.91	The 1/4 sec. cor. of secs. 2 and 3.
	<hr/>

Subdivision of Section 2,
T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>From the N. 1/16 sec. cor. of secs. 1 and 2.</p> <p>N. 89° 39' W., on the E. and W. center line of the NE¼ of sec. 2.</p> <p>Over rolling terrain.</p> <p>6.50 Trail road, bears SE. and NW.</p> <p>39.78 The center N. 1/16 sec. cor. of sec. 2.</p> <hr/> <p>N. 89° 46' W., on the E. and W. center line of the NW¼ of sec. 2.</p> <p>Over rolling terrain.</p> <p>2.30 Sweetwater County Road Nos. 33 and 38, bears SSE. and NNW.</p> <p>4.67 Point for the closing subdivision of sec. cor. at intersection with line 3-4, Lot 37.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> $\begin{array}{c} \text{T14N R107W} \\ \text{N} \frac{\text{CC}}{\text{S}} \frac{\text{TR 37}}{2} \text{N} \end{array}$ <p>2001</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, Cor. No. 2, Lot 38, on line 3-4, Lot 37, bears N. 0° 20' E., 8.79 chs. dist.</p> <p>40.25 The N. 1/16 sec. cor. of secs. 2 and 3.</p> <hr/>
--------	---

T. 14 N., R. 107 W., Sixth Principal Meridian, Wyoming

CHAINS

GENERAL DESCRIPTION

The area encompassed in this survey is located in the southwestern portion of Sweetwater County, approximately 21 miles south of Green River, Wyoming and approximately 27 miles southwest of Rock Springs, Wyoming. The terrain varies from rolling and broken to steep. The average elevation is about 6,700 feet above sea level. The vegetation consist of sagebrush and native grasses with scattered juniper. The bottom land along Currant Creek is used to grow hay. The soil is a mixture of sand and sandy loam.

Currant Creek passes through all the sections encompassed by the survey, and flows northwest into Flaming Gorge Reservoir. Significant permanent improvements consist of Currant Creek Ranch (abandoned) located in section 35, T. 15 N., R. 107 W.

Primary access is by Wyoming State Highway No. 191 to Sweetwater County Roads Nos. 33 and 38. Secondary access is by various graded, unimproved and four wheel drive roads.

CERTIFICATE OF SURVEY

I, Donna S. Malleck, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th day of May, 2001, I have dependently resurveyed Lots 37 and 38, and Tract 39, portions of the east and north boundaries, and subdivisional lines, and subdivided sections 1 and 2, Township 14 North, Range 107 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JUL 26 2002

(Date)

Donna S. Malleck

(Not Available for Signature)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of Lots 37 and 38, and Tract 39, portions of the east and north boundaries, and subdivisional lines, and the subdivision of sections 1 and 2, Township 14 North, Range 107 West, Sixth Principal Meridian, Wyoming, executed by Donna S. Malleck, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JUL 26 2002

(Date)



(Signature of Authorized Officer)