

641-6033

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION

OF THE SUBDIVISIONAL LINES,

AND THE SUBDIVISION OF SECTION 28,

TOWNSHIP 19 NORTH, RANGE 105 WEST,

OF THE SIXTH PRINCIPAL MERIDIAN,

IN THE STATE OF WYOMING.

EXECUTED BY

LYNN A. FORBES

CADASTRAL SURVEYOR

Under Special Instructions dated JULY 28, 1999, approved JULY 28, 1999, which provided for the surveys included under Group Number 665, and assignment instructions dated JULY 28, 1999.

Survey commenced AUGUST 8, 1999

Survey completed AUGUST 10, 1999

641-6033

INDEX DIAGRAM

Township 19 North, Range 105 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	4 28	2 27	26	25
		3			
31	32	33	34	35	36

T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, Township 19 North, Range 105 West, Sixth Principal Meridian, Wyoming.

Stephen W. Downey surveyed the subdivisional lines in 1872. This survey was subsequently cancelled. William S. Adams and Scott P. Stewart resurveyed the subdivisional lines in 1907.

Local surveyors have conducted numerous surveys in the area and the acceptance of such surveys is detailed herein.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 665, Wyoming, dated July 28, 1999.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data was thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed by Global Positioning System (GPS) methods using Trimble Navigation 4000SSI receivers. The instruments were maintained in proper adjustment at all times. The direction of all lines refer to the true meridian. All directions, distance and geographic position were determined by Global Positioning System methods.

The geographic position of the cor. of secs. 20, 21, 28 and 29, based on NAD 83 and determined by Global Positioning System (GPS) is:

Latitude 41° 36' 14.81" N., Longitude 109° 16' 19.69" W.

The magnetic declination is 12½° E.

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS													
	<p>(Restoring the survey executed by William S. Adams and Scott P. Stewart in 1907)</p> <hr/>												
	<p>Beginning at the cor. of secs. 27, 28, 33 and 34, remonumented by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, with an iron post, 2½ ins. diam., firmly set, flush with the surface of the ground, with undated brass cap mkd.</p>												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">BCA</td> </tr> <tr> <td style="text-align: center;">T19N</td> <td style="text-align: center;">R105W</td> </tr> <tr> <td style="text-align: center;">S 28</td> <td style="text-align: center;">S 27</td> </tr> <tr> <td colspan="2" style="text-align: center;"><hr/></td> </tr> <tr> <td style="text-align: center;">S 33</td> <td style="text-align: center;">S 34</td> </tr> <tr> <td colspan="2" style="text-align: center;">PELS 2533</td> </tr> </table>	BCA		T19N	R105W	S 28	S 27	<hr/>		S 33	S 34	PELS 2533	
BCA													
T19N	R105W												
S 28	S 27												
<hr/>													
S 33	S 34												
PELS 2533													
	<p>This position is accepted as a careful and faithful perpetuation of the 1907 resurveyed cor. position.</p>												
	<p>Cor. is located SW. of the intersection of Foothills Boulevard extending N., and Jackson Street extending E. and W.</p>												
	<p>N. 0° 02' W., bet. secs. 27 and 28.</p>												
	<p>Over level terrain, along Foothills Boulevard.</p>												
20.03	<p>Point for the S. 1/16 sec. cor. of secs. 27 and 28, falls in paved road. Point not monumented.</p>												
40.06	<p>Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate measurement by the method of irregular boundary adjustment, based on Rosendahl's record, falls in paved road; there is no remaining evidence of the 1907 resurvey monument or the monument set by Phillip W. Rosendahl, Wyoming Registered Land Surveyor No. 580, in 1984. Point not mounumented.</p> <hr/>												
	<p>N. 0° 09' W., beginning new measurement.</p>												
	<p>Over level terrain, along Foothills Boulevard.</p>												
29.87	<p>Point for the N-N 1/64 sec. cor. of secs. 27 and 28, falls in paved road. Point not monumented.</p>												
39.86	<p>The cor. of secs. 21, 22, 27 and 28, monumented with with the original 1907 U.S. Land Office monument, an iron post, 3 ins. diam., firmly set, 4 ins. below the surface of Foothills Boulevard, below a water valve cover flush with the surface of the road, with undated brass cap inscribed U.S. LAND OFFICE, and mkd.</p>												

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
	T19N S 21 S 22 ----- S 28 S 27 R105W
	<hr/> From the cor. of secs. 27, 28, 33 and 34. N. 87° 55' W., bet. secs. 28 and 33. Over nearly level terrain.
20.83	Point for the E. 1/16 sec. cor. of secs. 28 and 33. Point not monumented.
41.66	The ¼ sec. cor. of secs. 28 and 33, monumented with the original 1907 U.S. Land Office monument, an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap inscribed U.S. LAND OFFICE, and mkd.
	T19N S 28 1/4 ——— S 33 1982 R105W JFC LS 573
	Cor. is located at cor. of wooden fences extending N. and W. Joseph W. Manatos, Wyoming Registered Land Surveyor No. 573, referenced and reset this monument in it's original position, in 1982, as recorded on a certified land corner recordation certificate filed in the Sweetwater County Clerk's Office.
	<hr/> N. 87° 55' W., beginning new measurement. Over nearly level terrain.
41.50	The cor. of secs. 28, 29, 32 and 33, monumented with the original 1907 U.S. Land Office monument, an iron post, 3 ins. diam., firmly set, projecting 6 ins. above the ground, with undated brass cap, inscribed U.S. LAND OFFICE, and mkd.

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T19N S 29 S 28 ----- S 32 S 33 R105W</p>
	<p>Cor. is located 20 lks. W. of trail road, extending N. and S.</p> <hr/>
	<p>N. 0° 04' W., bet. secs. 28 and 29.</p> <p>Over nearly level terrain, along trail road.</p>
40.06	<p>The ¼ sec. cor. of secs. 28 and 29, reestablished by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, monumented with an iron post, 2½ ins. diam., firmly set 2 ins. below the surface of the ground, with brass cap inscribed AMI PELS 2533, and mkd.</p>
	<p style="text-align: center;">S 29 S 28 1/4 1997</p>
	<p>This position is accepted as a careful and faithful reestablishment of the 1907 resurvey cor. position.</p>
	<p>Cor. is located at intersection of trail roads extending N., E., S. and W.</p> <hr/>
	<p>N. 0° 04' W., beginning new measurement.</p> <p>Over nearly level terrain, along trail road.</p>
20.03	<p>The N. 1/16 sec. cor. of secs. 28 and 29, established by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p>
	<p style="text-align: center;">AMI 29 28 N 1/16 1997 PELS 2533</p>
	<p>This position is accepted as a careful and faithful determination of the cor. position.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS											
	<p>Cor. is located 20 lks. W. of trail road extending N. and S.</p> <hr/> <p>N. 0° 04' W., beginning new measurement.</p> <p>Over nearly level terrain, along trail road.</p>										
20.04	<p>The cor. of secs. 20, 21, 28 and 29, monumented with the original 1907 U.S. Land Office monument, an iron post, 2½ ins. diam., firmly set, projecting 15 ins. above the ground, with undated brass cap inscribed U.S. LAND OFFICE, and mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T19N</td></tr> <tr><td>20</td><td>21</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>29</td><td>28</td></tr> <tr><td colspan="2">R105W</td></tr> </table> </div>	T19N		20	21	<hr/>		29	28	R105W	
T19N											
20	21										
<hr/>											
29	28										
R105W											
	<p>Cor. is located next to two water valves projecting from the ground at intersection of trail roads extending N., E., S. and W.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 87° 46' W., bet. secs. 21 and 28.</p> <p>Over nearly level terrain, along trail road.</p>										
20.76	<p>Point for the E. 1/16 sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table> <tr><td>T19N</td><td>R105W</td></tr> <tr><td>S</td><td>21</td></tr> <tr><td>E1/16</td><td>—</td></tr> <tr><td>S</td><td>28</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div>	T19N	R105W	S	21	E1/16	—	S	28	1999	
T19N	R105W										
S	21										
E1/16	—										
S	28										
1999											
41.52	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 45 lks. S. of trail road extending E. and W.</p> <p>The ¼ sec. cor. of secs. 21 and 28, monumented with the original 1907 U.S. Land Office monument, an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with a steel fence post alongside, with undated brass cap inscribed U.S. LAND OFFICE, and mkd.</p>										

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">JFC T19N R105W S 28 C-S 1/16 RLS 2928</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <p>There is no remaining evidence of the monument set by Joseph W. Manatos in 1982.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
10.02	Point for the center N-S 1/64 sec. cor. of sec. 28. Point not monumented.
20.04	<p>The center ¼ sec. cor. of sec. 28, established by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, with an iron post, 2½ ins. diam., firmly set, flush with the surface of the ground, with brass cap mkd.</p>
	<p style="text-align: center;">ASPEN MT INC T19N C 1/4 R105W S 28 PELS 2533 1992</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
19.98	<p>The center N. 1/16 sec. cor. of sec. 28, established by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, with an iron post, 2½ ins. diam., firmly set, flush with the surface of the ground, with brass cap mkd.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">A M I N 1/16 C C S 28 T19N R105W 1992 PE LS 2533</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <p>Cor. is located at cor. of fences set in concrete, extending S. and E. along a residential lot.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
19.98	<p>The $\frac{1}{4}$ sec. cor. of secs. 21 and 28.</p> <hr style="width: 80%; margin: 10px auto;"/>
	<p>From the point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.</p> <p>N. $87^{\circ} 55' W.$, on the E. and W. center line of sec. 28.</p> <p>Over nearly level terrain.</p>
20.82	<p>The center E. 1/16 sec. cor. of sec. 28, established by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, with an iron post, $2\frac{1}{2}$ ins. diam., firmly set, flush with the surface of the ground, with brass cap mkd.</p>
	<p style="text-align: center;">AMI E1/16 C-C S 28 T19N R105W 1993 PELS 2533</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. $87^{\circ} 55' W.$, beginning new measurement.</p> <p>Over nearly level terrain.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
5.20	Point for the center E-W-E 1/256 sec. cor. of sec. 28. Point not monumented.
10.40	<p>Point for the center W-E 1/64 sec. cor. of sec. 28, an iron post, 30 ins. long, 2½ ins. diam., was found lying loose nearby with brass cap mkd. T19N R105W S28 1/64 1982 LS2500.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W W-E 1/64 C————C S 28 1999</p> <p>Bury the private monument alongside the iron post.</p>
20.80	<p>The center ¼ sec. cor. of sec. 28.</p> <hr style="width: 30%; margin-left: auto; margin-right: auto;"/> <p>N 87° 55' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>
20.80	<p>The center W. 1/16 sec. cor. of sec. 28, established by John A. Steil, Wyoming Registered Land Surveyor No. 2500, with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 1/16 1982 LS 2500</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr style="width: 30%; margin-left: auto; margin-right: auto;"/> <p>N. 87° 55' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>
20.75	<p>The ¼ sec. cor. of secs. 28 and 29.</p> <hr style="width: 80%; margin-left: 0;"/> <p>From the center E. 1/16 sec. cor. of sec. 28.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N 0° 04' W., on the N. and S. center line of the NE¼ of sec. 28.</p> <p>Over nearly level terrain.</p> <p>29.93 The center-N-NE 1/16 sec. cor. of sec. 28, established by Phillip W. Rosendahl, Wyoming Registered Land Surveyor No. 580, with an aluminum rod, 5/8 ins. diam., firmly set, projecting 6 ins. above the ground, with aluminum cap mkd. T19N R105W S28 C-N-NE 1/64 1984 WY LS 580. This position is accepted as a careful and faithful determination of the cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 C-N-NE 1/64 1999</p> <p>Deposit the aluminum rod and set a steel fence post alongside the iron post.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 04' W., beginning new measurement.</p> <p>Over nearly level terrain.</p> <p>9.98 The E. 1/16 sec. cor. of secs. 21 and 28.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the point for the N-N 1/64 sec. cor. of secs. 27 and 28.</p> <p>N. 87° 44' W., on the E. and W. center line of the NE¼NE¼ of sec. 28.</p> <p>Over nearly level terrain.</p> <p>20.77 The center N-NE 1/ 64 sec. cor. of sec. 28.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the point for the E. 1/16 sec. cor. of secs. 28 and 33.</p> <p>N. 0° 01' W., on the N. and S. center line of the SE¼ of sec. 28.</p> <p>Over nearly level terrain.</p>
--------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
20.03	<p>The SE. 1/16 sec. cor. of sec. 28, established by Phillip W. Rosendahl, Wyoming Registered Land Surveyor No. 580, with a steel reinforcement rod, 5/8 ins. diam., firmly set, projecting 1 in. above the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R105W SE 1/16 S 28 1984 WY LS 580</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 01' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>
10.02	<p>Point for the center N-SE 1/64 sec. cor. of sec. 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 C-N-SE 1/64 1999</p> <p>Set a steel fence post alongside the iron post.</p>
15.03	<p>Point for the center N-N-SE 1/256 sec. cor. of sec. 28. Point not monumented.</p>
20.04	<p>The center E. 1/16 sec. cor. of sec. 28.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the point for the S. 1/16 sec. cor. of secs. 27 and 28.</p> <p>N. 87° 55' W., on the E. and W. center line of the SE¼ of sec. 28.</p> <p>Over nearly level terrain.</p>
20.80	<p>The SE. 1/16 sec. cor. of sec. 28.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>N. 87° 55' W., beginning new measurement.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Over nearly level terrain.</p>
10.40	<p>Point for the center W-SE 1/64 sec. cor. of sec. 28. Point not monumented.</p>
20.80	<p>The center S. 1/16 sec. cor. of sec. 28.</p> <hr/> <p>From the point for the center W-SE 1/64 sec. cor. of sec. 28. NORTH, on the N. and S. center line of the NW$\frac{1}{4}$SE$\frac{1}{4}$ of sec. 28.</p> <p>Over nearly level terrain.</p>
10.02	<p>The NW-SE 1/64 sec. cor. of sec. 28, established by Phillip W. Rosendahl, Wyoming Registered Land Surveyor No. 580, with a steel reinforcement rod, 3/4 ins. diam., firmly set, 26 ins. below the surface of the ground, with aluminum cap mkd. NW-SE 1/64 S28 1984 LS580. This position is accepted as a careful and faithful determination of the cor. position. Also at this position a steel reinforcement rod, 18 ins. long 5/8 ins. diam., firmly set projecting 2 ins. above the ground, on top of the Rosendahl monument, with aluminum cap mkd. SWEETWATER CO SURVEY MONUMENT RLS 3116.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 28 ins. in the ground, on top of the Rosendahl monument, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 NW—SE 1/64 1999</p> <p>Deposit the Sweetwater Co. monument alongside the iron post.</p> <hr/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
5.01	<p>The center N-NW-SE 1/256 sec. cor. of sec. 28, established by Wallace W. Gudgell Registered Land Surveyor No. 3116, monumented with a steel reinforcement rod, 5/8 ins. diam., firmly set, projecting 2 ins. above the ground, with aluminum cap mkd. SWEETWATER CO SURVEY MONUMENT RLS 3116. This position is accepted as a careful and faithful determination of the cor. position.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 C-N-NW-SE 1/256 1999</p> <p>Deposit the steel reinforcement rod alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
5.01	<p>The center W-E 1/64 sec. cor. of sec. 28.</p> <hr/>
	<p>From the center N-SE 1/64 sec. cor. of sec. 28.</p> <p>N. 87° 55' W., on the E. and W. center line of the NW¼SE¼ of sec. 28.</p> <p>Over nearly level terrain.</p>
5.20	<p>Point for the center E-NW-SE 1/256 sec. cor. of sec. 28.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., flush with the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 C-E-NW-SE 1/256 1999</p> <p>Cor. is located under a residence's wooden fence extending E. and W.</p>
10.40	<p>The NW-SE 1/64 sec. cor. of sec. 28.</p>
20.80	<p>The point for the center N-S 1/64 sec. cor. of sec. 28.</p> <hr/>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
5.01	<p>From the center E-NW-SE 1/256 sec. cor. of sec. 28.</p> <p>N. 0° 01' W., on the N. and S. center line of the NE$\frac{1}{4}$NW$\frac{1}{4}$SE$\frac{1}{4}$ of sec. 28.</p> <p>Over nearly level terrain.</p> <p>The NE-NW-SE 1/256 sec. cor. of sec. 28, established by Wallace W. Gudgell Registered Land Surveyor No. 3116, monumented with a steel reinforcement rod, 24 ins. long, 5/8 ins. diam., firmly set, 4 ins. below the surface of the ground, with aluminum cap mkd. SWEETWATER CO SURVEY MONUMENT RLS 3116. This position is accepted as a careful and faithful determination of the cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R105W S 28 NE-NW-SE 1/256 1999</p> <p>Deposit the steel reinforcement rod alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 01' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>
5.01	<p>The point for the center E-W-E 1/256 of sec. 28.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the point for the center N-N-SE 1/256 sec. cor. of sec. 28.</p> <p>N. 87° 55' W., on the E. and W. center line of the NE$\frac{1}{4}$NW$\frac{1}{4}$SE$\frac{1}{4}$ of sec. 28.</p> <p>Over nearly level terrain.</p>
5.20	<p>The NE-NW-SE 1/256 sec. cor. of sec. 28.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 87° 55' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>

Subdivision of Section 28,
T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming

CHAINS	
5.20	<p>The center N-NW-SE 1/256 sec. cor. of sec. 28.</p> <hr/> <p>From the center W. 1/16 sec. cor. of sec. 28.</p> <p>NORTH, on the N. and S. center line of the NW¼ of sec. 28.</p> <p>Over nearly level terrain.</p>
20.01	<p>The NW. 1/16 sec. cor. of sec. 28, established by Harry J. Kessner, Wyoming Professional Engineer and Land Surveyor No. 2533, monumented with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">AMI NW 1/16 SEC 28 1997 PELS 2533</p> <p>This position is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>NORTH, beginning new measurement.</p> <p>Over nearly level terrain.</p>
20.01	<p>The W. 1/16 sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the center N. 1/16 sec. cor. of sec. 28.</p> <p>N. 87° 51' W., on the E. and W. center line of sec. 28..</p> <p>Over nearly level terrain.</p>
20.80	<p>The NW. 1/16 sec. cor. of sec. 28.</p> <hr/> <p>N. 87° 51' W., beginning new measurement.</p> <p>Over nearly level terrain.</p>
20.77	<p>The N. 1/16 sec. cor. of secs. 28 and 29.</p> <hr/>

T. 19 N., R. 105 W., Sixth Principal Meridian, Wyoming


CHAINS	GENERAL DESCRIPTION
	<p>The area embraced by this survey is situated in the west-central portion of Sweetwater County, in the northwest portion of the city of Rock Springs, Wyoming, in the Dry Creek and Hunters Ridge subdivisions. The terrain is nearly level with the average elevation of about 6,400 feet above sea level. Drainage of the area is generally southeasterly. The vegetation consist of native grasses, the rest is mostly residential lawns.</p> <p>Access is provided by Foothills Boulevard on the E. side of the section, and numerous streets within the subdivision.</p>

CERTIFICATE OF SURVEY

I, Lynn A. Forbes, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 28th day of July, 1999, I have dependently resurveyed of a portion of the subdivisional lines and the subdivided section 28, Township 19 North, Range 105 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 22 2000

(Date)

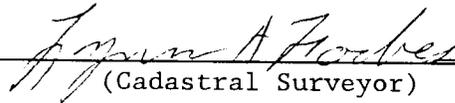

(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, Township 19 North, Range 105 West, of the Sixth Principal Meridian, in the State of Wyoming, executed by Lynn A. Forbes, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

SEP 22 2000

(Date)

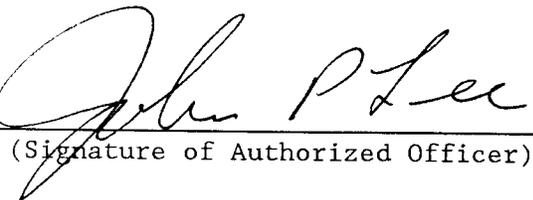

(Signature of Authorized Officer)