

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD NOTES**

OF THE  
DEPENDENT RESURVEY  
OF  
PORTIONS OF THE NORTH BOUNDARY  
AND  
SUBDIVISIONAL LINES,  
AND THE  
SUBDIVISION OF SECTION 5,  
AND THE METES AND BOUNDS SURVEY OF LOT 1, SECTION 5,  
TOWNSHIP 38 NORTH, RANGE 115 WEST,  
OF THE  
SIXTH PRINCIPAL MERIDIAN,  
IN THE STATE OF WYOMING.

**EXECUTED BY**

JAMES D. CLAFLIN

CADASTRAL SURVEYOR

PATRICIA STEIKUNAS FACTOR

FOREST LAND SURVEYOR

Under Special Instructions dated MAY 13, 1997, approved MAY 15, 1997, which provided for the surveys included under Group Number 640, and assignment instructions dated MAY 13, 1997.

Survey commenced MAY 20, 1997

Survey completed AUGUST 11, 1997

# INDEX DIAGRAM

Township 38 North, Range 115 West

2

6	7 5 6	5 4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of Section 5.....Page 8  
Metes and Bounds Survey of Lot 1, Section 5.....Page 12

## T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

## CHAINS

The following field notes are those of the dependent resurvey of portions of the north boundary and subdivisional lines, the subdivision of section 5, and the metes and bounds survey of lot 1, section 5, Township 38 North, Range 115 West, of the Sixth Principal Meridian, Wyoming.

Adrian J. Parshall surveyed a portion of the north boundary and the subdivisional lines in 1907. Andrew Nelson remonumented corners on the line between sections 4 and 5, in 1962.

Numerous section subdivision corners of unknown origin have been recovered by local land surveyors and ultimately accepted as careful and faithful determinations of the true corner positions. These corners have been attributed to Camp Davis summer surveying students, an official record has not been recovered. Numerous local surveys have been performed in the area and are described in detail herein.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 640, Wyoming, dated May 13, 1997.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data were thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed with a WILD T2000 electronic total station, a WILD model TC1000 Total Station, and by chaining methods. The instruments were maintained in proper adjustment at all times. The direction of all lines refer to the true meridian, determined by hour angle observations of the sun at various points along the lines of survey and carried forward by sustained angulation.

The geographic position of the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., based on NAD 83 and determined by satellite positioning methods, is:

Latitude 43° 17' 36" N. and Longitude 110° 38' 12" W.

The mean magnetic declination is 14° E.

Dependent Resurvey, Portions of the North Boundary,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS

(Restoring the survey executed by  
Adrian J. Parshall in 1907)

---

Beginning at the cor. of secs. 4, 5, 32 and 33, on the N. bdy.  
of the Tp., monumented with an iron post, 2½ ins. diam., firmly  
set, projecting 3 ins. above the ground, with brass cap mkd.

T39N	R115W
S 32	S 33
-----	
S 5	S 4
T38N	
1962	

Cor. is located S. 20° W., 83 lks. dist. from center line of  
Wyoming State Highway No. 89, extending SE. and NW.

N. 89° 58' W., bet. secs. 5 and 32.

Over rolling terrain.

- 1.00 Teton National Forest Road No. 30460, bears N. and S.
- 3.70 Descend over flood plain.
- 18.93 The witness cor. to the E. 1/16 sec. cor. bet. secs. 5 and 32,  
monumented by Paul N. Scherbal, Wyoming Registered Land  
Surveyor, No. 164, with an iron post 2½ ins., diam., firmly set  
flush with the surface of the ground, with brass cap mkd.

T39N	R115W
S 32	-----
E 1/16	-----
S 5	-----
T38N	R115W
W.C. 66' E	
1966	

This position is accepted as a careful and faithful  
determination of the cor. position. A Certified Land Corner  
Recordation is on file in the Teton County Clerk's Office.

- 19.10 Right bank, Hoback River, course NW., thence across river.
- 19.93 True point for the E. 1/16 sec. cor. of secs. 5 and 32, falls in  
the Hoback River, where it is impracticable to establish a  
permanent monument.
-

Dependent Resurvey, Portions of the North Boundary,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 89° 58' W., beginning new measurement.
	Over nearly level terrain, across river.
4.03	Left bank Hoback River, course NW.
12.07	Left bank Hoback River, course W.
14.00	Lone Eagle Camp and Broken Arrow Ranch Road, extends N. and S.
18.39	Right bank Hoback River, course W.
19.89	The ¼ sec. cor. of secs. 5 and 32, monumented by Paul N. Scherbal, Wyoming Registered Land Surveyor, No. 164, with an iron post 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd.
	T39N R115W S 32 1/4 ——— S 5 T38N 1966
	This position is accepted as a careful and faithful perpetuation of the original cor. position. A Certified Land Corner Recordation is on file in the Teton County Clerk's Office.
	—————
	N. 89° 58' W., beginning new measurement.
	Over nearly level terrain.
0.82	Right bank Hoback River, course NW., thence across river.
5.40	Left bank Hoback River, course NW., thence over nearly level terrain.
10.00	Ascend abruptly.
11.32	Top of ascent; thence over rolling terrain.
19.96	The W. 1/16 sec. cor. of secs. 5 and 32, remonumented by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post 2½ ins., diam., firmly set, projecting 6 ins. above the ground, with brass cap inscribed: PIERSON LAND SURVEYS JACKSON WY and mkd.

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>from which the 1962 bearing trees</p> <p>A spruce, 12 ins. diam., bears S. <math>73\frac{1}{2}^{\circ}</math> E., 33 lks. dist., with healed blaze.</p> <p>A spruce, 11 ins. diam., bears N. <math>46\frac{1}{2}^{\circ}</math> W., 12.5 lks. dist., with healed blaze.</p> <p>Cor. is located in pole fence extending N. and S.</p> <hr/> <p>N. <math>0^{\circ} 01'</math> W., beginning new measurement.</p> <p>Across Hoback River.</p>
0.11	Right bank Hoback River, course WNW.
8.40	Top of bench, bears E. and W.
20.03	<p>The N. 1/16 sec. cor. of secs. 4 and 5, monumented by Peter M. Jorgenson, Wyoming Professional Engineer and Land Surveyor No. 2612, with an iron post, <math>2\frac{1}{2}</math> ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap inscribed PETER M. JORGENSEN PE &amp; LS 2612 and mkd.</p> <p style="text-align: center;">T38N R115W N1/16 S 5   S 4 1990</p> <p>This position is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr/> <p>N. <math>0^{\circ} 03'</math> W., beginning new measurement.</p> <p>Over rolling terrain.</p>
18.10	Teton National Forest Road No. 30460, bears SE. and NW.
20.02	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.</p> <hr/> <p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. <math>89^{\circ} 54'</math> W., bet. secs. 5 and 8.</p> <p>Over rolling terrain, through timber.</p>

Dependent Resurvey, Portions of the North Boundary,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>T39N R115W SEC 32 W1/16 SEC 5 T38N R115W 1996 PLS 3831</p>
	<p>This position was recovered by Paul N. Scherbal, Wyoming Registered Land Surveyor, No. 164, in 1966, and is accepted a careful and faithful determination of the cor. position. A Certified Land Corner Recordation is on file in the Teton County Clerk's Office.</p> <hr/> <p>N. 89° 57' W., beginning new measurement.</p> <p>Over nearly level terrain, through dense willows.</p>
0.92	Right bank Willow Creek, course N.
3.68	Left bank Willow Creek, course N.
7.72	Center of irrigation ditch extending northerly.
19.81	<p>The cor. of secs. 5, 6, 31 and 32, perpetuated by Paul N. Scherbal, Wyoming Registered Land Surveyor No. 164, with an iron post 2½ ins. diam., firmly set, projecting 8 ins. above the ground, in a collar of stone, with brass cap mkd.</p>
	<p>T39N R115W S 31   S 32 ----- S 6   S 5 T38N R115W 1966</p>
	<p>This position is accepted as a careful and faithful perpetuation of the original cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr/>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS

(Restoring the survey executed by  
Adrian J. Parshall in 1907)

From the cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2½ ins. diam., firmly set, projecting 3 ins. above the ground, in a mound of stone, at cor. of fences extending N. and E., with brass cap mkd.

T38N R115W	
S 5	S 4
S 8	S 9
1962	

N. 0° 01' E., bet. secs. 4 and 5.

Over rolling terrain, along fence.

19.92 The S. 1/16 sec. cor of secs. 4 and 5, monumented by person(s) unknown with a concrete post, 6x6 ins. square, firmly set, projecting 2 ins. above the ground, with steel plate mkd. T38N R115W S1/16 S5 S4 1987. This position was perpetuated by Paul N. Scherbal, Wyoming Registered Land Surveyor No. 164. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.

Cor. is located 2 lks. E. of intersection of fences, extending N., S. and W.

N. 0° 02' W., beginning new measurement.

Over rolling terrain, along fence.

18.30 Left bank Hoback River, course WNW.

19.92 True point for the ¼ sec. cor. of secs. 4 and 5, falls in active channel of Hoback River, where it is impracticable to establish a permanent monument, determined at record bearing and distance from the witness corner established by Andrew Nelson in 1962.

An iron post, 2½ ins. diam., bears NORTH, 0.50 chs. dist., firmly set, projecting 6 ins. above the ground, in a small mound of stone, with brass cap mkd.

T38N R115W	
S 5	S 4
WC	
33 FT	
1962	

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

<p>CHAINS</p> <p>39.76</p>	<p>The ¼ sec. cor. of secs. 5 and 8, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, monumented with an iron post 2½ ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.</p> <p style="text-align: center;">T38N R115W S 5 1/4 S 8 1996</p> <p>from which</p> <p style="padding-left: 40px;">A pine 14 ins. diam., bears N. 25° E., 89.4 lks. dist., mkd. 1/4 S5 BT.</p> <p style="padding-left: 40px;">A pine 14 ins. diam., bears N. 44° W., 48.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr/> <p>From the ¼ sec. cor. of secs. 5 and 6, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, monumented with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, in a collar of stone, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.</p> <p style="text-align: center;">T38N R115W 1/4 S 6   S 5 1996</p> <p>from which</p> <p style="padding-left: 40px;">A lodgepole pine, 12 ins. diam., bears S. 78° E., 33 lks. dist., mkd. 1/4 S 5 BT.</p> <p style="padding-left: 40px;">A lodgepole pine, 12 ins. diam., bears N. 28° E., 37.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>This position is accepted as a careful and faithful perpetuation of the original cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p>
----------------------------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 0° 04' E., bet. secs. 5 and 6.
	Descend over rolling terrain, through timber.
8.64	Faint trail road, bears NE. and SW.
12.00	Irrigation ditch extending NE. and SW.
19.76	The N. 1/16 sec. cor. of secs. 5 and 6, monumented by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.
	T38N R115W N1/16 S 6   S 5 1996
	This position is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.
	_____
	N. 0° 05' E., beginning new measurement.
	Over nearly level terrain, through dense willows.
3.30	Right bank Willow Creek, bears ESE. and WNW.
4.25	Left bank Willow Creek, bears ESE. and WNW.
13.30	Ascend abruptly, over mountainous terrain.
19.82	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.
	Subdivision of Section 5, T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming
	From the ¼ sec. cor. of secs. 5 and 8.
	N. 0° 03' W., on the N. and S. center line of sec. 5.
	Descend over rolling terrain, through timber.

Subdivision of Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.16	<p>The center <math>\frac{1}{4}</math> sec. cor. of sec. 5, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post <math>2\frac{1}{2}</math> ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.</p> <p style="text-align: center;">S 5 T38N R115W C 1/4 S 5 1996</p> <p>from which</p> <p style="padding-left: 40px;">A lodgepole pine, 18 ins. diam., bears S. <math>82^{\circ}</math> E., 56 lks. dist., mkd. C 1/4 S 5 BT.</p> <p style="padding-left: 40px;">A lodgepole pine, 12 ins. diam., bears S. <math>28^{\circ}</math> W., 27.7 lks., dist., mkd. X at breast height and BT at base.</p> <p>This position was previously established by person(s) unknown and is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. <math>0^{\circ} 02'</math> W., beginning new measurement.</p> <p>Descend over rolling terrain.</p>
13.60	<p>Base of descent, over nearly level terrain.</p>
19.92	<p>The center N. <math>\frac{1}{16}</math> sec. cor. of sec. 5, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, with brass cap inscribed PLS 3831 and mkd.</p> <p style="text-align: center;">T38N R115W S 5 CN 1/16 1996</p> <p>This position was previously established by person(s) unknown and is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. <math>0^{\circ} 09'</math> W., beginning new measurement.</p>

Subdivision of Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over nearly level terrain.
16.50	Descend abruptly to floodplain, through marshy ground.
18.00	Left bank Hoback River, course E.
19.70	Right bank Hoback River, course E.
19.90	The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp.
	<hr/>
	From the true point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5. N. 89° 39' W., on the E. and W. center line of sec. 5.
	Over gently rolling terrain.
19.89	The center E. 1/16 sec. cor. of sec. 5, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an aluminum cap, 1½ ins. diam., firmly set inside existing steel pipe $\frac{3}{4}$ ins. diam., firmly set flush in concrete, under a 20 ft. high steel triangulation structure, cap inscribed PLS 3831 SURVEY POINT. This position was previously established by person(s) unknown and is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.
	<hr/>
	N. 89° 36' W., beginning new measurement.
	Ascend over rolling terrain.
19.89	The center $\frac{1}{4}$ sec. cor. of sec. 5.
	<hr/>
	N. 89° 36' W., beginning new measurement.
	Ascend over rolling terrain.
19.92	The center W. 1/16 sec. cor. of sec. 5, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.
	S 5 T38N R115W CW 1/16 S 5 1996

Subdivision of Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>from which</p> <p>A fir, 10 ins. diam., bears S. 60° E., 60.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>A fir, 14 ins. diam., bears S. 62° W., 49 lks. dist., mkd. C-W 1/16 S 5 BT.</p> <p>This position was previously established by person(s) unknown and is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr/> <p>N. 89° 38' W., beginning new measurement.</p> <p>Ascend over mountainous terrain.</p>
19.96	<p>The ¼ sec. cor. of secs. 5 and 6.</p>
	<hr/> <p>From the center E. 1/16 sec. cor. of sec. 5.</p> <p>N. 0° 01' W., on the N. and S. center line of the NE¼ of sec. 5.</p> <p>Over gently rolling terrain.</p>
19.97	<p>The NE. 1/16 sec. cor. of sec. 5, identical with Cor. No. 9, Lot 1, perpetuated by Scott R. Pierson, Wyoming Registered Land Surveyor No. 3831, with an iron post, 2½ ins. diam., firmly set at an intersection of fences extending N., E. and W., projecting 4 ins. above the ground, with brass cap inscribed PIERSON LAND SURVEYS PLS 3831 JACKSON WY and mkd.</p>
	<p style="text-align: center;">S 5 T38N R115W NE 1/16 S 5 1996</p>
	<p>This position was previously established by person(s) unknown and is accepted as a careful and faithful perpetuation of the cor. position. A Certified Land Corner Recordation is on file at the Teton County Clerk's Office.</p> <hr/> <p>N. 0° 10' W., beginning new measurement, on the N. and S. center line of the NE¼ of sec. 5, identical in part with line 9-8, Lot 1.</p>

Subdivision of Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over nearly level terrain.
8.50	Descend over rolling terrain.
14.81	Point for Cor. No. 8, Lot 1, hereinafter described.
15.00	Descend to River bottom.
18.18	Left bank Hoback River, course NW.
19.98	True point for the E. 1/16 sec. cor. bet. secs. 5 and 32, on the N. bdy of the Tp., falls in river.
<hr/>	
	From the N. 1/16 sec. cor. of secs. 4 and 5.
	N. 89° 50' W., on the E. and W. center line of sec. 5, identical in part with line 9-1, Lot 1.
	Descend over gently rolling terrain.
5.25	Right bank Hoback River, course NW.
7.60	Left bank Hoback River, course NW
13.75	Cor. No. 1, Lot 1, hereinafter described.
19.42	Trail road, bears N. and S.
19.89	The NE. 1/16 sec. cor. of sec. 5.
<hr/>	
	N. 89° 44' W., beginning new measurement.
	Over nearly level terrain.
19.90	The center N. 1/16 sec. cor. of sec. 5.
<hr/>	
<p>Metes and Bounds Survey of Lot 1, Section 5, T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming</p>	
<hr/>	
	Beginning at the point for Cor. No. 1, Lot 1, on the E. and W. center line of the NE¼ of sec. 5.
	Set an aluminum post, 28 ins. long., 2½ ins. diam., 22 ins. in the ground, atop a U. S. Forest Service line marker cap, with magnet, in a collar of stone, with aluminum cap mkd.


Metes and Bounds Survey Lot 1, Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
3.35	<p style="text-align: center;">T38N R115W LOT 1   1   S5 1997</p> <p>N. 2° 41' W., on line 1-2, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 2, Lot 1.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 22 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p>
1.77	<p style="text-align: center;">T38N R115W 2   S5 LOT 1   1997</p> <p>N. 31° 30' W., on line 2-3, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 3, Lot 1.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 22 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p>
2.57	<p style="text-align: center;">T38N R115W LOT 1   3   S5 1997</p> <p>N. 15° 18' W., on line 3-4, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 4, Lot 1.</p>

Metes and Bounds Survey Lot 1, Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 18 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T38N R115W LOT 1 4   S5 1997</p>
2.18	<p>N. 23° 06' W., on line 4-5, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 5, Lot 1.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 20 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T38N R115W LOT 1 5   S5 1997</p>
5.13	<p>N. 7° 08' W., on line 5-6, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 6, Lot 1.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 22 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T38N R115W LOT 1 6   S5 1997</p>

Metes and Bounds Survey Lot 1, Section 5,  
T. 38 N., R. 115 W., Sixth Principal Meridian, Wyoming

CHAINS	
1.59	<p>N. 63° 00' W., on line 6-7, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 7, Lot 1.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 20 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T38N R115W</p> <p>S 5</p>  <p>7</p> <p>LOT 1</p> <p>1997</p> </div>
1.55	<p>S. 77° 59' W., on line 7-8, Lot 1.</p> <p>Over nearly level terrain, along upper bench of Hoback River.</p> <p>Point for Cor. No. 8, Lot 1, on the N. and S. center line of the NE¼ of sec. 5.</p> <p>Set an aluminum post, 28 ins. long., 2½ ins. diam., 22 ins. in the ground, atop a U. S. Forest Service line marker cap with magnet, in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T38N R115W</p> <p>S 5</p>  <p>8</p> <p>LOT 1</p> <p>1997</p> </div>
14.81	<p>S. 0° 10' E., on line 8-9, Lot 1, identical in part with the N. and S. center line of the NE¼ of sec. 5.</p> <p>Over nearly level terrain.</p> <p>Cor. No. 9, Lot 1, identical with the NE. 1/16 sec. cor. of sec. 5.</p> <p>S. 89° 50' E., on line 9-1, Lot 1, identical in part with the E. and W. center line of the NE¼ of sec. 5.</p>



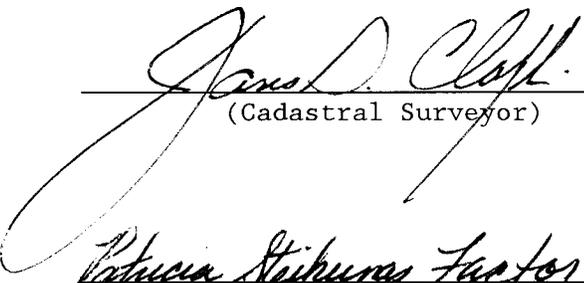


## CERTIFICATE OF SURVEY

We, James D. Claflin, Cadastral Surveyor and Patricia Steikunas Factor, Forest Land Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 13th day of May, 1997, have dependently resurveyed portions of the north boundary and subdivisional lines, subdivided section 5, and executed the metes and bounds survey of Lot 1, Section 5, Township 38 North, Range 115 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

DEC 13 1999

\_\_\_\_\_  
(Date)

  
\_\_\_\_\_  
(Cadastral Surveyor)

DEC 13 1999

\_\_\_\_\_  
(Date)

  
\_\_\_\_\_  
(Cadastral Surveyor)

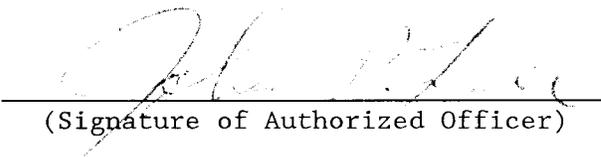
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of portions of the north boundary and subdivisional lines, the subdivision of section 5, and the metes and bounds survey of Lot 1, Section 5, Township 38 North, Range 115 West, of the Sixth Principal Meridian, in the State of Wyoming, executed by James D. Claflin, Cadastral Surveyor, and Patricia Steikunas Factor, Forest Land Surveyor, having been critically examined and found correct, are hereby approved.

DEC 13 1999

\_\_\_\_\_  
(Date)

  
\_\_\_\_\_  
(Signature of Authorized Officer)