

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

THE SOUTH BOUNDARY

AND

A PORTION OF THE EAST BOUNDARY,
TOWNSHIP 43 NORTH, RANGE 67 WEST,
OF THE SIXTH PRINCIPAL MERIDIAN,
IN THE STATE OF WYOMING.

EXECUTED BY

JAMES D. CLAFLIN

CADASTRAL SURVEYOR

RYAN R. LORENZEN

SURVEYING TECHNICIAN

Under Special Instructions dated MARCH 25, 1997, approved MARCH 28, 1997, which provided for the surveys included under Group Number 635, and assignment instructions dated MARCH 28, 1997.

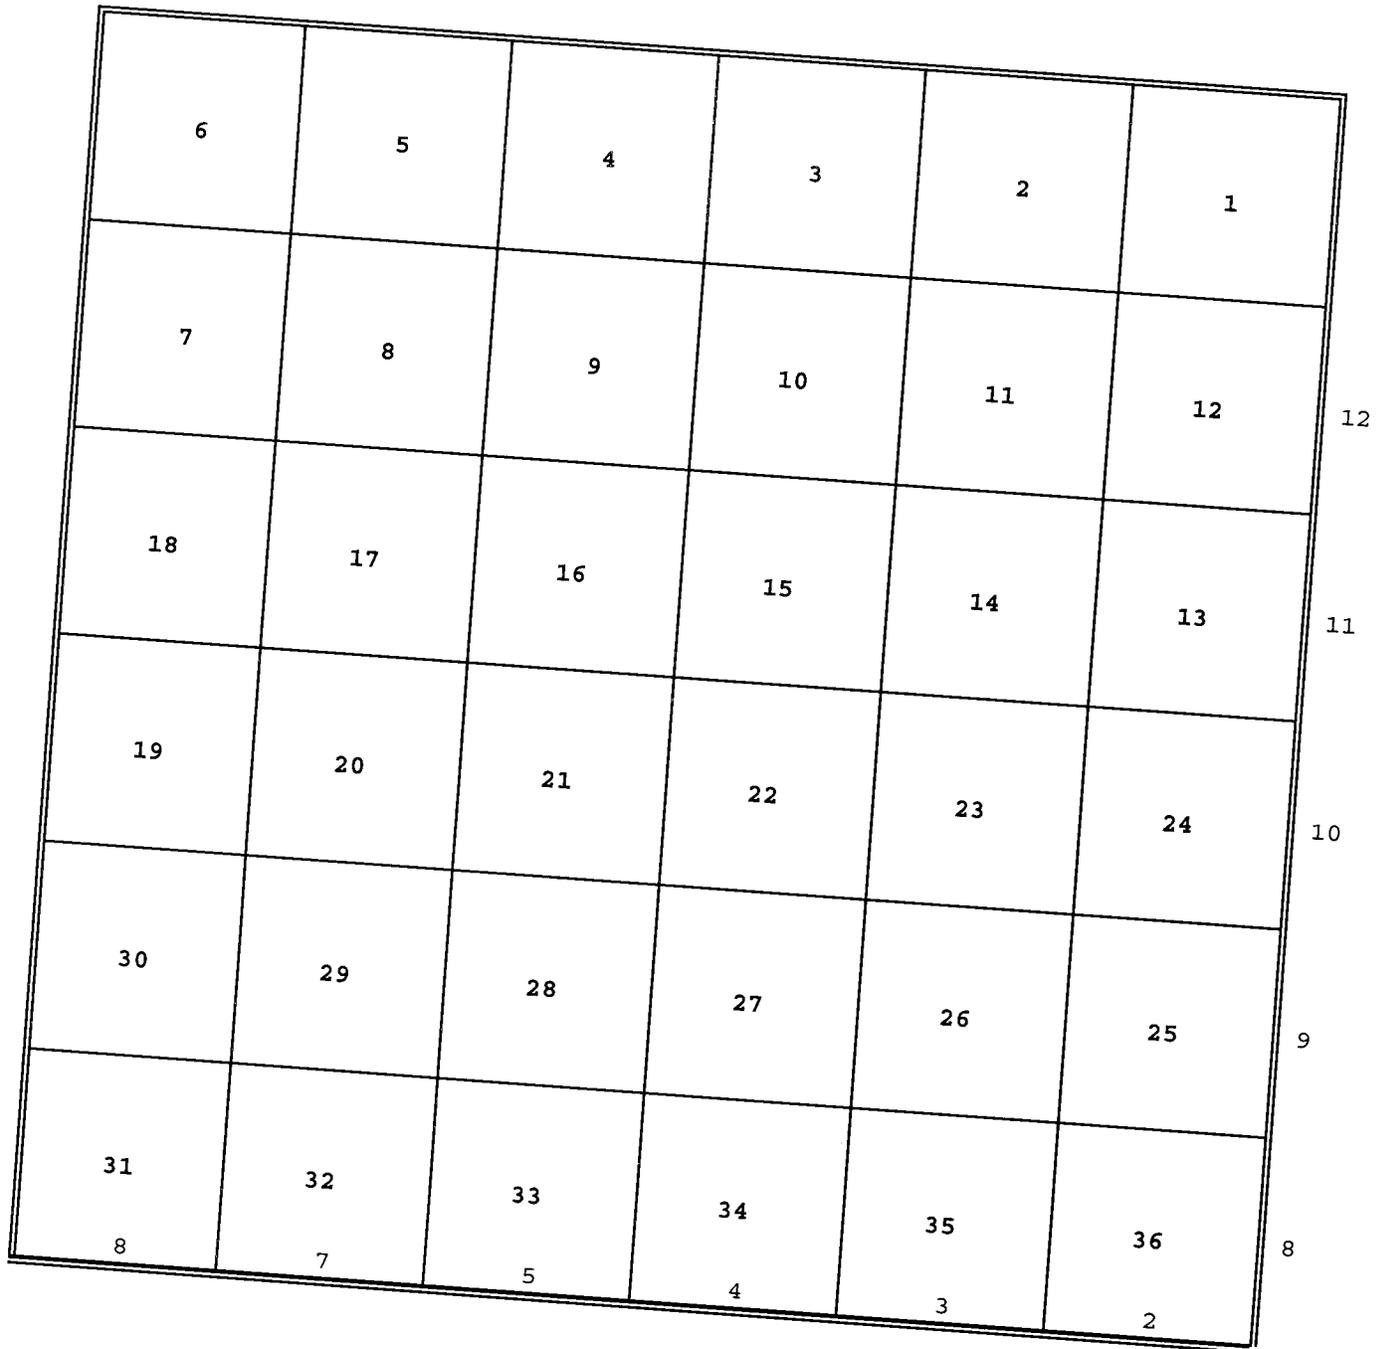
Survey commenced SEPTEMBER 30, 1997

Survey completed OCTOBER 9, 1999

INDEX DIAGRAM

385

Township 43 North, Range 67 West



T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS

The following field notes are those of the dependent resurvey of the south boundary and portions of the east boundary and subdivisional lines, Township 43 North, Range 67 West, of the Sixth Principal Meridian, Wyoming.

Alpheus P. Hanson surveyed the exterior boundaries and subdivisional lines in 1882. Russell C. MacDonald dependently resurveyed the north boundary, portions of the east boundary and subdivisional lines, and subdivided section 4 in 1956. Richard A. Kohler dependently resurveyed the west boundary in 1992.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 635, Wyoming, dated March 25, 1997.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data was thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed with a WILD Model T1000 electronic theodolite, and a WILD Model DI1600 electronic distance meter, and by chaining methods. The instruments were maintained in proper adjustment at all times. The directions of all lines refer to the true meridian, determined by hour angle observations of the the sun at various points along the lines of survey and carried forward by sustained angulation.

Detectable Electronically Energized Particles (DEEP-1 TM) were buried as memorials at certain corner monuments. The "DEEP-1" is composed of strontium encased in a color coded plastic container. The units are 1 inch in diameter, 2½ inches long, weigh 2½ ounces, and are magnetically detectable to an average depth of 8 feet.

The geographic position of the southeast corner of the township, based on NAD 83 and determined by satellite positioning methods is:

Latitude 43° 39' 16.661" N., Longitude 104° 50' 21.974" W.

T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS

The mean magnetic declination is $11\frac{1}{2}^{\circ}$ E.

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

(Restoring the survey executed by
Alpheus P. Hanson in 1882)

Beginning at the cor. of Tps. 42 and 43 N., Rs. 66 and 67 W., monumented by William R. Robinson, Wyoming Registered Land Surveyor No. 38, with an iron post, 36 ins. long, 3 ins. diam., firmly set 30 ins. in the ground, with shallow pits to the SE., SW. and NW., and a wooden post lying alongside, with iron cap, 4x3 ins. square, mkd.

1953	
R67W R66W	
T43N T43N	
<hr/>	
T42N T42N	
R67W R66W	
W.R.R. CO.	

This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.

T43N	
R67W R66W	
S 36 S 31	
<hr/>	
S 1 S 6	
T42N	
1997	

Bury the private monument upside down alongside the iron post.

S. $89^{\circ} 01'$ W., bet. secs. 1 and 36.

Over gently rolling terrain.

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.16	<p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W S 36 1/4 — S 1 T42N 1997</p> </div> <p>Set a steel fence post alongside the iron post.</p>
79.90	Newly constructed fence, bears N. and S.
80.32	<p>Point for the cor. of secs. 1, 2, 35, and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W S 35 S 36 — — S 2 S 1 T42N 1997</p> </div>
	S. 89° 01' W., bet. secs. 2 and 35.
	Over gently rolling terrain.
40.16	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W S 35 1/4 — S 2 T42N 1997</p> </div>

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located N. 70¼° W., 1.02 chs. dist., from intersection of fences extending N., ESE. and W.</p> <p>60.24 Point for the W. 1/16 sec. cor. of secs. 2 and 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W S 35 W1/16— S 2 T42N 1997</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located N. 67¼° W., 2.19 chs. dist., from cor. of fences extending N. and E.</p>
67.30	Black Thunder Creek, course S.
75.50	Little Thunder Creek, course NW.
80.32	<p>Point for the cor. of secs. 2, 3, 34, and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W S 34 S 35 — — S 3 S 2 T42N 1997</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 81.8 lks. N. of fence extending irregularly E. and W.</p>
	<hr/> <p>S. 89° 01' W., bet. secs. 3 and 34.</p>

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Over rolling terrain.
40.16	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R67W S 34 1/4 ——— S 3 T42N 1997</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 76.1 lks. N. of fence extending irregularly E. and W.</p>
80.32	<p>Point for the cor. of secs. 3, 4, 33, and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R76W S 33 S 34 ————— S 4 S 3 T42N 1997</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located on W. edge of hill, 22.4 lks. N. of fence extending irregularly E. and W.</p>
20.08	<p>S. 89° 01' W., bet. secs. 4 and 33.</p> <p>Over gently rolling terrain.</p> <p>Point for the E. 1/16 sec. cor. of secs. 4 and 33.</p>

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R67W S 33 E1/16 ——— S 4 T42N 1997</p>
	<p>Set a steel fence post alongside the iron post.</p>
	<p>Cor. is located N. 62° E., 1.10 chs. dist., from cor. of fences extending irregularly E. and S.</p>
36.00	<p>Little Thunder Creek, course SE.</p>
40.16	<p>Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R67W S 33 1/4 ——— S 4 T42N 1997</p>
	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.</p>
59.70	<p>Little Thunder Creek, course NE.</p>
80.32	<p>Point for the cor. of secs. 4, 5, 32, and 33, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a small collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R76W S 32 S 33 ————— S 5 S 4 T42N 1997</p>

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located S. 88° E., 2.72 chs. dist., from cor. of fences extending SSE. and W.</p>
	<p>S. 89° 01' W., bet. secs. 5 and 32.</p> <p>Over gently rolling terrain.</p>
19.00	Lynch Road, bears N. and S.
34.30	Draw, drains S.
40.16	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R67W</p> <p>S 32</p> <p>1/4 ———</p> <p>S 5</p> <p>T42N</p> <p>1997</p> </div>
	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.</p> <p>Cor. is located 1.10 chs. N. of fence extending irregularly E. and W., in projection of fence from the W.</p>
45.25	Draw, drains SE.
80.32	<p>Point for the cor. of secs. 5, 6, 31, and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43N R76W</p> <p>S 31 S 32</p> <p>————— —————</p> <p>S 6 S 5</p> <p>T42N</p> <p>1997</p> </div>

Dependent Resurvey of the South Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in small draw, drains E., N. 72° E., 1.34 chs. dist., from intersection of fences extending N., E. and W.</p>
	<p>S. 89° 01' W., bet. secs. 6 and 31.</p>
	<p>Over gently rolling terrain.</p>
40.16	<p>Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T43N R67W S 31 1/4 — S 6 T42N 1997</p>
	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.</p> <p>Cor. is located 1.59 chs. N. of fence extending irregularly E. and W.</p>
78.56	<p>The cor. of Tps. 42 and 43 N., Rs. 67 and 68 W., monumented with an iron post, 2½ ins. diam., as described in the 1992 field notes of the dependent resurvey, T. 43 N., R. 68 W.</p>
	<p style="text-align: center;">Dependent Resurvey, Portion of the East Boundary, T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming</p>
	<p style="text-align: center;">(Restoring the survey executed by Alpheus P. Hanson in 1882, and the subsequent dependent resurvey by Russell C. MacDonald in 1956)</p>
	<p>From the cor. of Tps. 42 and 43 N., Rs. 66 and 67 W.</p> <p>N. 0° 15' E., bet. secs. 31 and 36.</p> <p>Over gently rolling terrain.</p>

Dependent Resurvey, Portion of the East Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.805	<p>Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T43N R76W R66W 1/4 S 36 S 31 1997</p> <p>Set a steel fence post alongside the iron post.</p>
79.61	<p>The cor. of secs. 25, 30, 31, and 36, monumented by James H. Hildebrand, Wyoming Professional Engineer and Land Surveyor No. 383, with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, in small collar of stone, with brass cap inscribed WYO. HIGHWAY DEPART. 1968 and mkd.</p> <p style="text-align: center;">T43N 25 30 ----- 36 31 R67W R66W</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p>
39.93	<p>N. 0° 41' E., bet. secs. 25 and 30.</p> <p>Over gently rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T43N R67W R66W 1/4 S 25 S 30 1997</p>

Dependent Resurvey, Portion of the East Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS													
79.86	<p>Set a steel fence post alongside the iron post.</p> <p>The cor. of secs. 19, 24, 25, and 30, determined at midpoint between the reference monuments established by James H. Hildebrand, Wyoming Professional Engineer and Land Surveyor No. 383, in 1968</p> <p>An iron post, 2½ ins. diam., bears EAST, 30.2 lks. dist., firmly set, projecting 2 ins. above the ground, with brass cap mkd. WYO. HIGHWAY DEPART. 1968 T43N R66W R67W S19 S24 S25 S30 20' and an arrow pointing toward the cor., in a collar of stone, with a broken steel fence post lying alongside.</p> <p>An iron post, 2½ ins. diam., bears WEST, 30.2 lks. dist., firmly set, projecting 6 ins. above the ground, with brass cap mkd. WYO. HIGHWAY DEPART. 1968 T43N R66W R67W S19 S24 S25 S30 20' and an arrow pointing toward the cor., in a collar of stone, with a steel fence post alongside.</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p> <table data-bbox="860 1260 1023 1470" style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T43N</td></tr> <tr><td style="text-align: center;">R67W</td><td style="text-align: center;">R66W</td></tr> <tr><td style="text-align: center;">S 24</td><td style="text-align: center;">S 19</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S 25</td><td style="text-align: center;">S 30</td></tr> <tr><td colspan="2" style="text-align: center;">1997</td></tr> </table> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located in bottom of draw, drains SSW.</p>	T43N		R67W	R66W	S 24	S 19	-----		S 25	S 30	1997	
T43N													
R67W	R66W												
S 24	S 19												

S 25	S 30												
1997													
39.85	<p>N. 0° 11' E., bet. secs. 19 and 24.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate distance; there is no remaining evidence of the original cor.</p>												

Dependent Resurvey, Portion of the East Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p>
53.60	<p style="text-align: center;">T43N R67W R66W 1/4 S 24 S 19 1997</p> <p>Set a steel fence post alongside the iron post.</p>
79.70	<p>Wyoming State Highway No. 450, bears ENE. and WSW.</p> <p>The cor. of secs. 13, 18, 19, and 24, monumented by James H. Hildebrand, Wyoming Professional Engineer and Land Surveyor No. 383, with an iron post, 2½ ins. diam., firmly set flush with the surface of the ground, in a collar of stone, with a steel fence post alongside, with brass cap inscribed WYO. HIGHWAY DEPART. 1968 and mkd.</p>
	<p style="text-align: center;">T43N 13S 18S ----- 24S 19S R67W R66W</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>Cor. is located in deep draw, drains SW.</p>
22.70	<p>N. 0° 16' E., bet. secs. 13 and 18.</p> <p>Over rolling terrain.</p>
39.88	<p>Cellars Loop Road, bears ESE and WNW.</p>
	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey, Portion of the East Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T43N R67W R66W 1/4 S 13 S 18 1997</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located N. 20° E., 2.46 chs. dist., from intersection of fences extending N., E. and S.</p> <p>79.76 The cor. of secs. 7, 12, 13, and 18, monumented by James H. Hildebrand, Wyoming Professional Engineer and Land Surveyor No. 383, with an iron post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, in a collar of stone, with a steel fence post alongside, with brass cap inscribed WYO. HIGHWAY DEPART. 1968 and mkd.</p> <p style="text-align: center;">T43N 12S 7S ----- 13S 18S R67W R66W</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>Cor. is located 57.1 lks. E. of fence extending N. and S.</p>
39.91	<p>N. 0° 20' E., bet. secs. 7 and 12.</p> <p>Over rolling terrain.</p> <p>The 1/4 sec. cor. of secs. 7 and 12, monumented with a sandstone, 13X12X4 ins., firmly set 8 ins. in the ground, no mks. visible. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p>

Dependent Resurvey, Portion of the East Boundary,
T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T43N R67W R66W 1/4 S 12 S 7 1997</p> <p>Bury the unmkd. stone and set a steel fence post alongside the iron post. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.</p> <p>Cor. is located 35.2 lks. E. of fence extending N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 09' E., beginning new measurement.</p> <p>Over rolling terrain.</p>
19.935	<p>Point for the N. 1/16 sec. cor. of secs. 7 and 12.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white "DEEP-1" magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T43N R67W R66W N1/16 S 12 S 7 1997</p>
39.87	<p>Set a steel fence post alongside the iron post and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.</p> <p>Cor. is located 18.2 lks. E. of fence extending N. and S.</p> <p>The cor. of secs. 1, 6, 7, and 12, monumented with an iron post, 2½ ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T43N R67W R66W S 1 S 6 <hr style="width: 10%; margin: 0 auto;"/>S 12 S 7 1956</p>
	<p>Cor. is located in projected intersection of fences from the N., E. and S.</p> <hr style="width: 60%; margin: 10px auto;"/>

T. 43 N., R. 67 W., Sixth Principal Meridian, Wyoming

CHAINS	<p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embrace by this survey is situated in the southwest portion of Weston County, approximately 36 miles southwest of Newcastle, Wyoming.</p> <p>The terrain is gently rolling, with the elevation ranging from about 4,200 feet on the south boundary along Black Thunder Creek, to about 4,650 feet above sea level, on the east boundary between sections 7 and 12. The soil is sandy loam, with vegetation consisting of sagebrush and native grasses.</p> <p>The drainage is secondary to Black Thunder Creek, draining southeasterly, crossing the south boundary between sections 2 and 35. Wildcat Creek, drains southeasterly crossing the east boundary between sections 1 and 6. Evidence of past oil exploration prevails in the area.</p> <p>The Field Ranch is situated approximately 3/4 of a mile south of the southeast corner of the township. Access is provided by Wyoming State Highway No. 450, extending northeasterly and southwesterly through the south half of the township, with numerous other county and trail roads throughout the area.</p>
--------	--

CERTIFICATE OF SURVEY

401

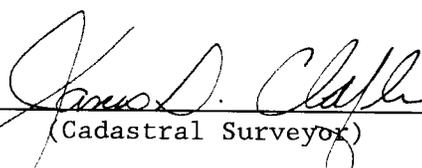
We, James D. Claflin, Cadastral Surveyor, and Ryan R. Lorenzen, Survey Technician, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of March, 1997, we have dependently resurveyed the south boundary and a portion of the east boundary, Township 43 North, Range 67 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

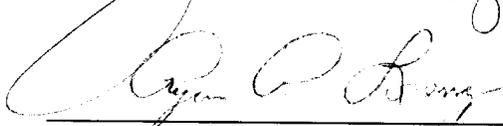
MAY 1 8 2000

(Date)

MAY 1 8 2000

(Date)


 (Cadastral Surveyor)


 (Survey Technician)

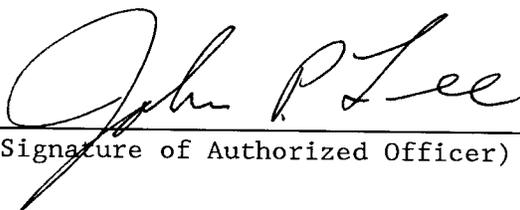
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of the south boundary, and a portion of the east boundary, Township 43 North, Range 67 West, Sixth Principal Meridian, Wyoming, executed by James D. Claflin, Cadastral Surveyor, and Ryan R. Lorenzen, Survey Technician, having been critically examined and found correct, are hereby approved.

MAY 1 8 2000

(Date)


 (Signature of Authorized Officer)