


TOWNSHIP 12 NORTH, RANGE 90 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY AND METES AND BOUNDS SURVEY

SURVEY INFORMATION AND CERTIFICATE

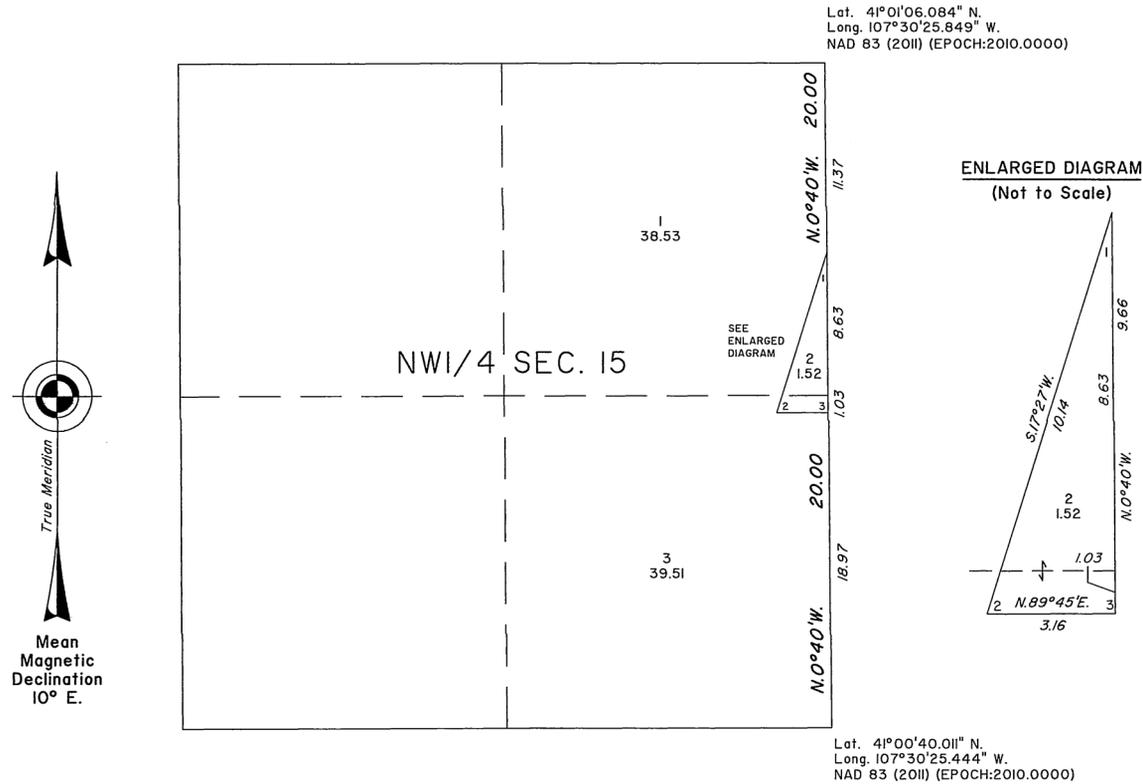

This plat represents the entire record of the dependent resurvey of a portion of the subdivision of section 15, and the metes and bounds survey of Lot 2, section 15, Township 12 North, Range 90 West, Sixth Principal Meridian, Wyoming.

The history of earlier surveys pertaining to this survey is as follows:

George W. Baker retraced the Wyoming-Colorado State Boundary, surveyed the Third Standard Parallel North (north boundary), the remaining township exteriors and the subdivisional lines in 1880. Sonja S. Sparks resurveyed a portion of the subdivisional lines, and surveyed the subdivision of section 15 in 2010.

Except as indicated hereon, the lottings and areas are as shown on the plat approved April 20, 1881.

The area embraced by this survey is situated in southwest Carbon County, approximately 1 mile S. of Dixon, Wyoming, near the Wyoming-Colorado State Boundary. The terrain is nearly level to mountainous, with a mean elevation of 6500 ft. above sea level. The soil is sandy and rocky. Vegetation consists of sagebrush and native grasses, mixed with cottonwood, juniper and cedar trees. Drainage of the area is generally northerly to the Little Snake River, which drains northwest. There are ranching and haying operations in the area. Access is provided by U.S. Highway 789, Wyoming State Highway 70, Carbon County Roads No. 601 and 607, Moffett County, Colo. Road No. 2, and unimproved dirt roads.

The direction and length of all lines were determined by Trimble Model R8M3 Global Positioning System/Global Navigation Satellite Systems (GPS/GNSS) receivers. Cadastral project control and corner measurements determined during the GPS/GNSS survey achieve the accuracy standards stated in "Standards For the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems (GNSS)", dated February 23, 2009. The directions of all lines refer to the true meridian and are reported as mean bearings. All reported positions are referenced to the NAD 83(CORS 96) (EPOCH: 20002) datum. The National Geodetic Survey Online Positioning Service (OPUS) - Static was used to determine the coordinates of the GPS Control. Documentation of the determined positions is included in the group file.

I, Bradley F. Dillon, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions dated May 6, 2013, and Assignment Instructions dated May 6, 2013, for Group Number 883, Wyoming, I have dependently resurveyed a portion of the subdivision of section 15 and executed the metes and bounds survey of Lot 2, section 15, Township 12 North, Range 90 West, Sixth Principal Meridian, Wyoming, and that this plat, in one sheet, represents the entire record of this survey. Survey commenced May 30, 2013, and completed June 18, 2013, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 2009, and in specific manner described hereon.

Bradley F. Dillon
Bradley F. Dillon
Cadastral Surveyor


August 7, 2013
Date

The center 1/4 sec. cor. of sec. 15, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the official record of the 2010 dependent resurvey, executed under Group No. 811, Wyoming.

Cor. is located on a steep NNW. facing slope.

Point for Cor. No. 1, Lot 2, sec. 15.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, atop a plastic encased magnetic marker, with brass cap mkd.




Set a steel fence post nearby.

Cor. is located 24 lks. W. of trail road, bears irregularly N. and SSW.

The center N. 1/16 sec. cor. of sec. 15, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the official record of the 2010 dependent resurvey, executed under Group No. 811, Wyoming.

Point for Cor. No. 2, Lot 2, sec. 15.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, atop a plastic encased magnetic marker, with brass cap mkd.




Cor. is located near the corner of a 2 strand barbed wire and wire mesh fence extending NNE. and E.

The 1/4 sec. cor. of secs. 10 and 15, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the official record of the 2010 dependent resurvey, executed under Group No. 811, Wyoming.

Cor. is located in an open horse pasture.

Point for Cor. No. 3, Lot 2, sec. 15.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, atop a plastic encased magnetic marker, with brass cap mkd.



Cor. is located 1 lk. N. of a 6 strand barbed wire fence extending E. and W.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming

August 7, 2013

This plat representing the entire record of this survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

John P. Lee

John P. Lee
Chief Cadastral Surveyor for Wyoming