


TOWNSHIP 17 NORTH, RANGE 93 WEST OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

CORRECTIVE DEPENDENT RESURVEY

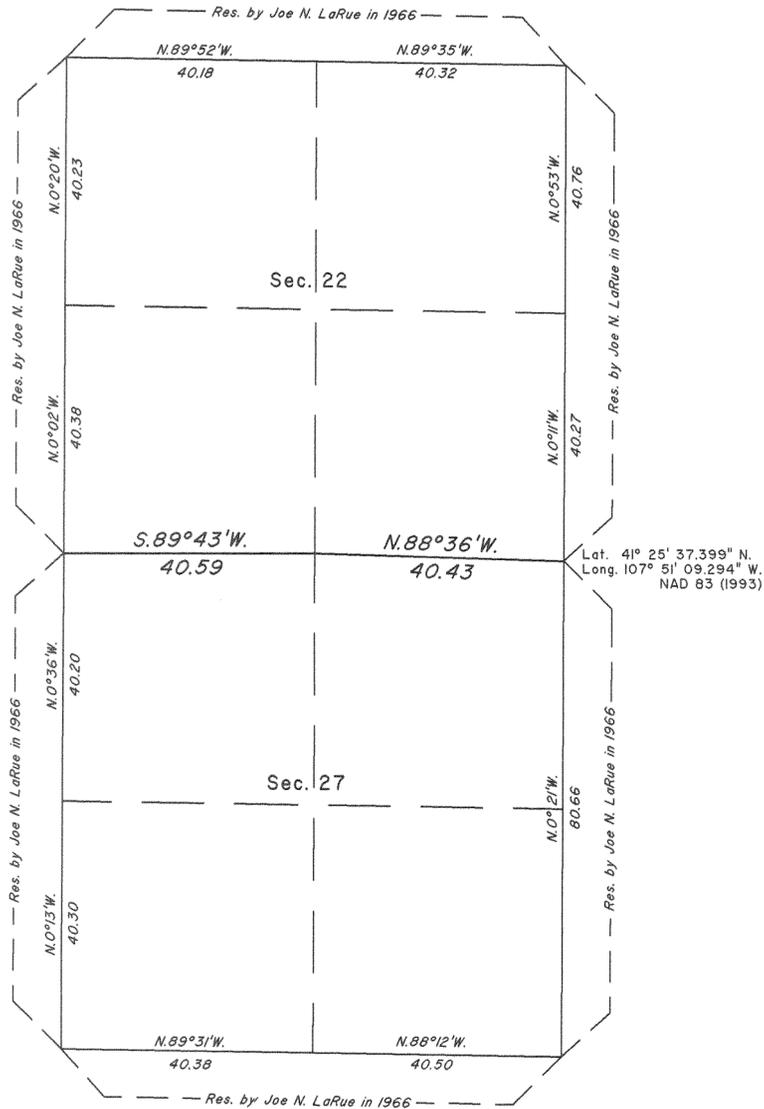

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the corrective dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, Township 17 North, Range 93 West, Sixth Principal Meridian, Wyoming.

Mortimer N. Grant surveyed the subdivisional lines in 1883. Joe N. LaRue dependently resurveyed the subdivisional lines in 1966.

Notification from Brian L. Forbes, President D. R. Griffin and Associates, Inc., and Wyoming Registered Land Surveyor No. 5653, dated October 22, 2004, purported recovering the original 1/4 section corner of secs. 22 and 27, which was overlooked during the 1966 dependent resurvey. A subsequent field investigation confirmed the purported findings. This corrective dependent resurvey as shown hereon corrects the 1966 dependent resurvey.

Except as indicated hereon, the lotting and areas are as shown on the plats approved September 18, 1883, and October 4, 1968.

The survey was executed with Trimble Navigation Model 4700 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM No. 2001-186, "Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods", dated July 26, 2001. The directions of all lines refer to the true meridian. The directions, distances, and geographic positions were determined by GPS observations.

I, Lynn A. Forbes, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions dated February 15, 2005, and Assignment Instructions dated February 15, 2005, for Group No. 742, Wyoming, have corrected the dependent resurvey of a portion of the subdivisional lines, Township 17 North, Range 93 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Field assistant was Sonja S. Sparks, Cadastral Surveyor (Student Trainee). Survey was executed February 25, 2005, and has been made in strict conformity with the special instructions, the Manual of Surveying Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described hereon.

Lynn A. Forbes
Lynn A. Forbes
Cadastral Surveyor

August 3, 2005
Date

The cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with a weathered sandstone, firmly set, projecting 4x5x3 ins. above the ground, no mks. visible, alongside, with a steel post alongside, with brass cap mkd.

T17N R93W
S 22 S 23

S 27 S 26
1966

The 1/4 sec. cor. of secs. 22 and 27, monumented with a sandstone, 8x6x2 ins., firmly set 4 ins. in the ground, plainly mkd. 1/4 on N. face, with a steel fence post alongside.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T17N R93W
S 22
1/4
S 27
2005


Bury the original cor. stone, and retain the steel fence post alongside the stainless steel post.

From this point, the erroneous position for the 1/4 sec. cor. of secs. 22 and 27, as reestablished during the 1966 dependent resurvey, bears S. 0° 22' W., 5.16 chs. dist., monumented with an iron post, 28 ins. long, 2 1/2 ins. diam., firmly set 22 ins. in the ground, with brass cap mkd. T17N R93W 1/4 S22 S27 1966. I add the mks. AM on the brass cap and bury the iron post in place, 5 ins. below the surface of the ground.

The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with steel fence post alongside, with brass cap mkd.

T17N R93W
S 21 S 22

S 28 S 27
1966



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming

August 3, 2005

This plat representing the entire record of this survey, having been correctly executed in accordance with the requirements of law and the regulations of this bureau, is hereby accepted.

For the Director

John P. Lee
John P. Lee
Chief Cadastral Surveyor for Wyoming