


TOWNSHIP 17 NORTH, RANGE 93 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

CORRECTIVE DEPENDENT RESURVEY

SURVEY INFORMATION

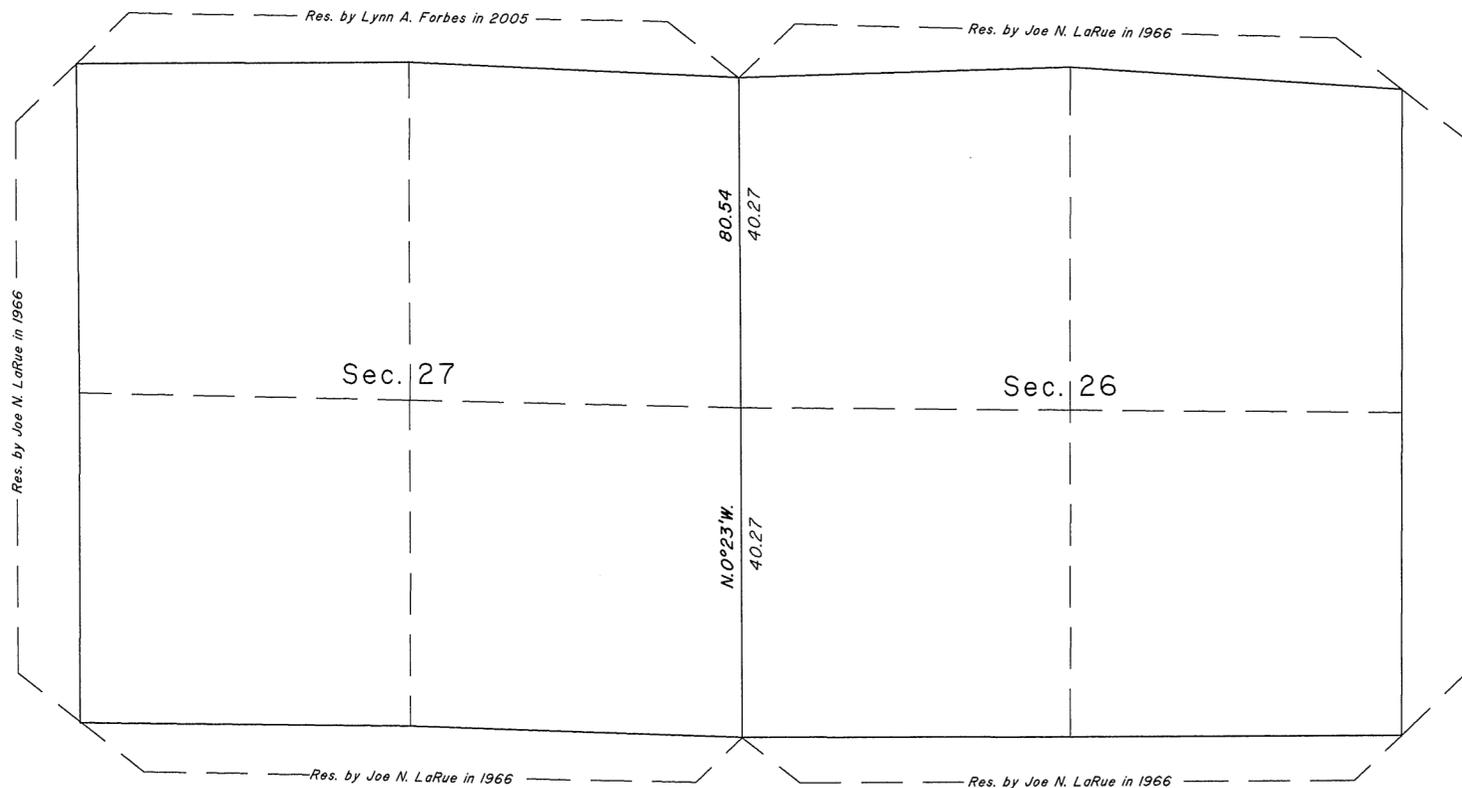

This plat represents the entire record of the corrective dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, Township 17 North, Range 93 West, Sixth Principal Meridian, Wyoming.

Mortimer N. Grant surveyed the subdivisional lines in 1883. Joe N. LaRue dependently resurveyed the subdivisional lines in 1966.

Notification from Clement Ray Williams, Survey Manager for D. R. Griffin and Associates, Inc., and Wyoming Professional Land surveyor No. 6263, dated 4/30/2010, identified the 1966 1/4 sec. cor. of secs. 26 and 27 as set in the ground, created a substantial bearing break that did not match the survey record. A subsequent field investigation confirmed the findings. This corrective dependent resurvey as shown hereon corrects the 1966 dependent resurvey.

The survey was executed with TRIMBLE Model 5800 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM 2010-094, "Incorporating Standards for the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems", dated April 1, 2010. The directions of all lines refer to the true meridian as determined by GPS observations.

SURVEY CERTIFICATE

I, Sonja S. Sparks, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions and Assignment Instructions dated May 10, 2010, for Group No. 822, Wyoming, have corrected the dependent resurvey of a portion of the subdivisional lines, Township 17 North, Range 93 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this survey. Field assistants were Bradley A. Dickson and Courtney L. Carpenter, Survey Technicians. Survey was executed May 13, 2010, and has been made in strict conformity with the special instructions, the Manual of Surveying Instructions, 2009, and in the specific manner described hereon.

Sonja S. Sparks
Sonja S. Sparks
Cadastral Surveyor
October 13, 2011
Date

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming
October 13, 2011

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director
John P. Lee
John P. Lee
Chief Cadastral Surveyor for Wyoming



The cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the surface of the ground, with a steel fence post alongside, with brass cap mkd.

T17N R93W
S 27 | S 26
S 34 | S 35
1966

Cor. is located 0.59 chs. E. of an underground pipeline, extending N. 39° E. and S. 39° W.

Point for the 1/4 sec. cor. of secs. 26 and 27, determined at proportionate distance, as described in the field notes and depicted on the plat of the 1966 resurvey.

From this point, the monument erroneously reestablished for the 1/4 sec. cor. of secs. 26 and 27 during the 1966 resurvey, bears S. 86° 59' W., 3.92 chs. dist., an iron post, 28 ins. long, 2 1/2 ins. diam., firmly set 23 ins. in the ground, with a steel fence post alongside, with brass cap mkd. T17N R93W 1/4 S 26 S 27 1966.

With no apparent or record use of this erroneous position by others,

Reset the iron post at the proportionate point, 26 ins. in the ground, and add the mks. to read

T17N R93W
1/4
S 27 | S 26
2010
1966

Set a steel fence post alongside the iron post.

The cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the surface of the ground, with a sandstone buried alongside, with a portion projecting 3 ins. above the surface of the ground, with a steel fence post nearby, with brass cap mkd.

T17N R93W
S 22 | S 23
S 27 | S 26
1966

