


# TOWNSHIP 12 NORTH, RANGE 68 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

## LOCATION AND REMONUMENTATION OF CERTAIN CORNERS

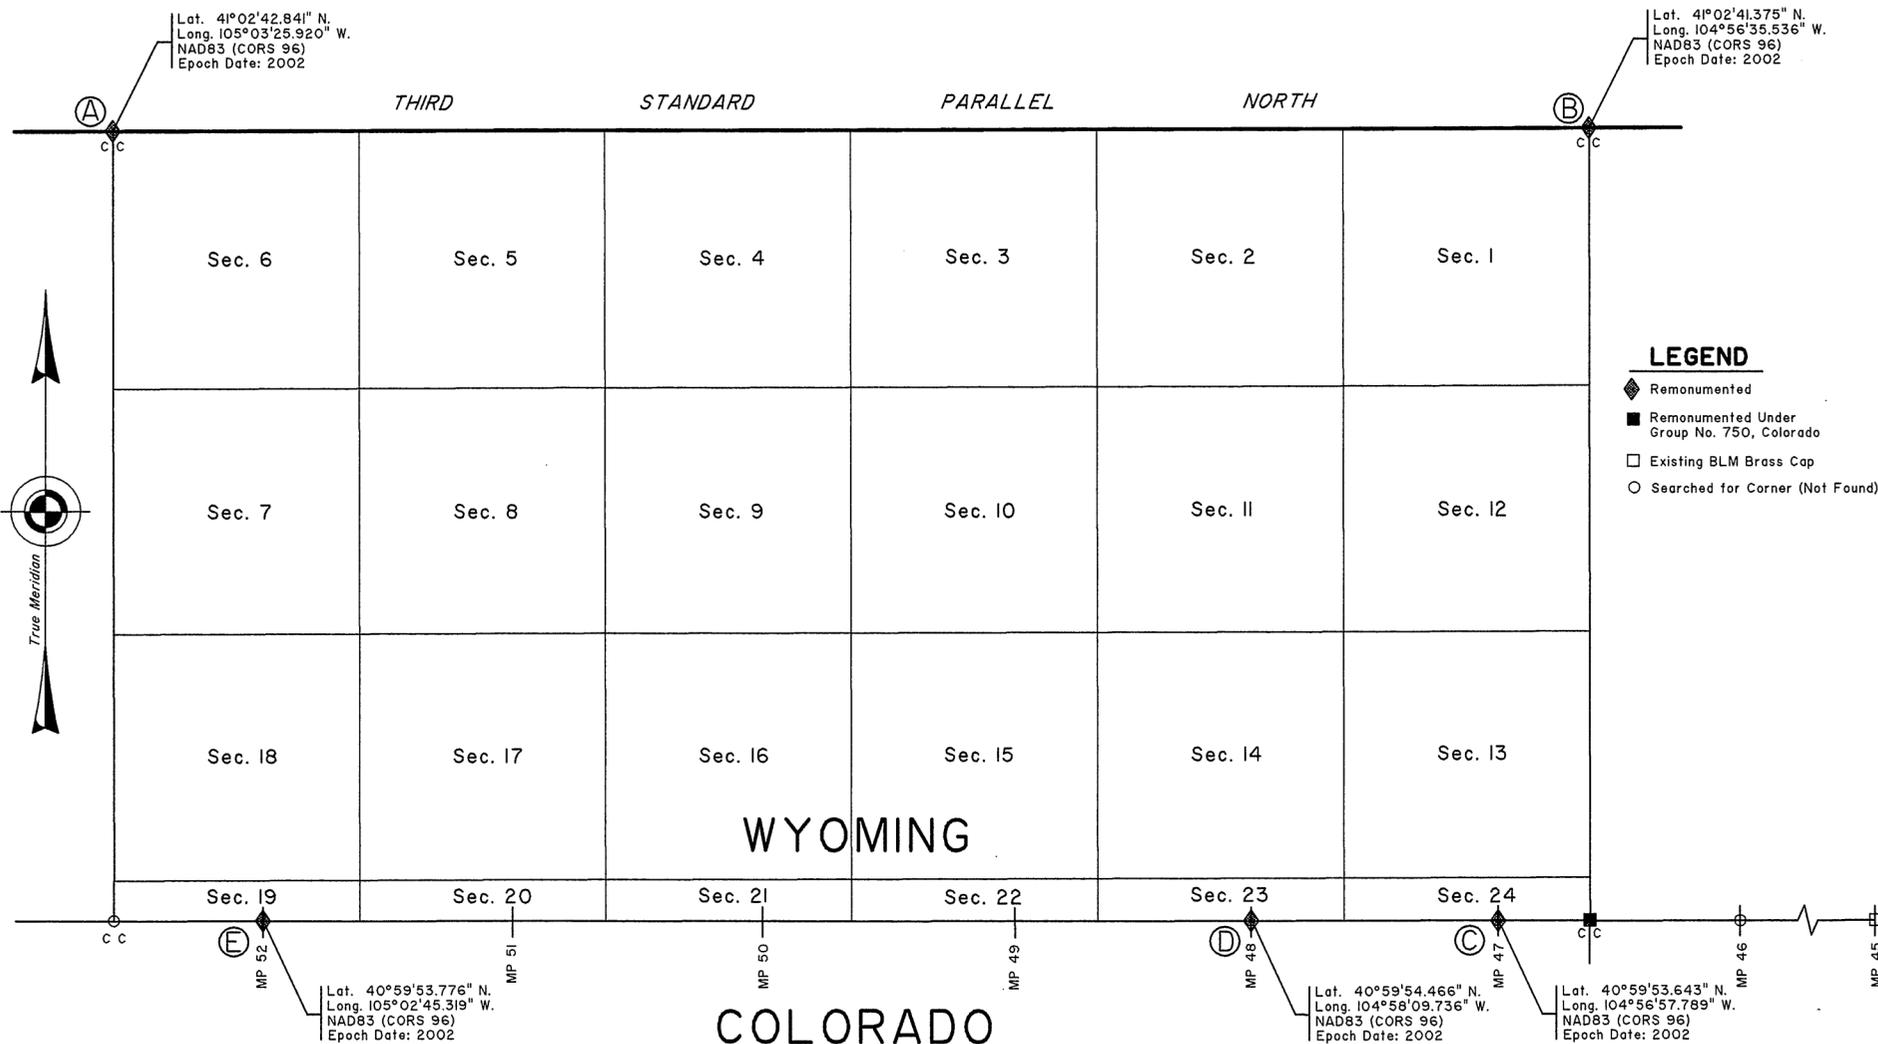

### SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the location and remonumentation of certain corners, Township 12 North, Range 68 West, Sixth Principal Meridian, Wyoming.

The remonumentation of certain corner points established by W.M. Ashley, U.S. Deputy Surveyor, in 1867, and A.V. Richards, U.S. Astronomer and Surveyor, in 1873, was made at the request of the Geographic Coordinate Data Base (GCDB) Program Manager, Washington Office, Bureau of Land Management.

The geographic coordinates, in NAD 83 (CORS 96), epoch date 2002, for the corners as shown, were determined by Global Positioning System (GPS) observations.

I, Darryl A. Wilson, Colorado Registered Professional Land Surveyor #23059, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions dated June 11, 1990, and Assignment Instructions dated September 20, 2004, for Group No. 540, Wyoming, I have located and remonumented certain corners which are represented on this plat, Township 12 North, Range 68 West, Sixth Principal Meridian, Wyoming. Survey commenced October 4, 2004, and completed October 10, 2004, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in specific manner described hereon.

*Darryl A. Wilson*  
Darryl A. Wilson  
Surveyor

January 15, 2009  
Date

### CORNER DESCRIPTIONS

**A** The closing cor. of Tps. 12 N., Rs. 68 and 69 W., at intersection of fences extending N., E., S. and W. This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T13N R68W  
S 31  
SI 36  
R69W/R68W  
T12N  
CC  
2004

**B** The closing cor. of Tps. 12 N., Rs. 67 and 68 W., at intersection of fences extending S. and W. This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R67W  
S 31  
SI 36  
R68W/R67W  
T12N  
CC  
2004

From this point, the standard cor. of Tps. 13 N., Rs. 67 and 68 W., bears W., 4.10 chs. dist., monumented with a granite stone, 15 x 10 x 5 ins., loosely set in a mound of stone, plainly mkd. 6 grooves on a face, and 6 grooves on opposite face. Cor. is located in a corner of fences extending N., E. and W.

**C** Mile Post 47, monumented with a mound of stone, 6 ft. diam., 20 ins. high. This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 5 ft. diam., 10 ins. high, with brass cap mkd.

MP 47  
WYO  
COLO  
2004

**D** Mile Post 48, monumented with a mound of stone, 4 1/2 ft. diam., 13 ins. high. This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, at the center of the mound of stone, with brass cap mkd.

MP 48  
WYO  
COLO  
2004

**E** Mile Post 52, monumented with a mound of stone, 6 ft. diam., 1 ft. high, with a wood post, 6 ft. long, lying alongside, with faint, illegible scribe mks.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, in a mound of stone, 6 ft. diam., 9 ins. high, with brass cap mkd.

MP 52  
WYO  
COLO  
2004

Deposit the wood post atop the mound of stone.

Cor. is located in a fence extending E. and W.

