

TOWNSHIP 18 NORTH, RANGE 99 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING
DEPENDENT RESURVEY

CORNER DESCRIPTIONS

(A) The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, in a collar of stone, steel fence post nearby, with brass cap mkd.

T18N R99W
S 10 | S 11
S 15 | S 14
1910

Cor. is located on open sagebrush covered ground.

(B) The 1/4 sec. cor. of secs. 10 and 15, determined at proportionate distance, there is no remaining evidence of the 1910 resurvey cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T18N R99W
S 10
1/4
S 15
2001

Set a steel fence post nearby

Cor. is located 65 lks. S. of a trail road, bears SSE. and NNW.

(C) The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above ground, in a collar of stone, steel fence post nearby, with brass cap mkd.

T18N R99W
S 9 | S 10
S 16 | S 15
1910

Cor. is located on open sagebrush covered ground.

(D) Cor. no. 3 of Tract 37, monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above ground, steel fence post nearby, with brass cap erroneously mkd.

T18N R99W
TR 37
3
S 10
1925

Brass cap was not remarked.

Cor. is located on open sagebrush covered ground.




(E) Point for cor. no. 4 of Tract 37, determined by the method of grant boundary adjustment, there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic coated magnet, with brass cap mkd.

T18N R99W
TR 37
4
S 10
2006

Set a steel fence post nearby.

Cor. is located on open barren ground.

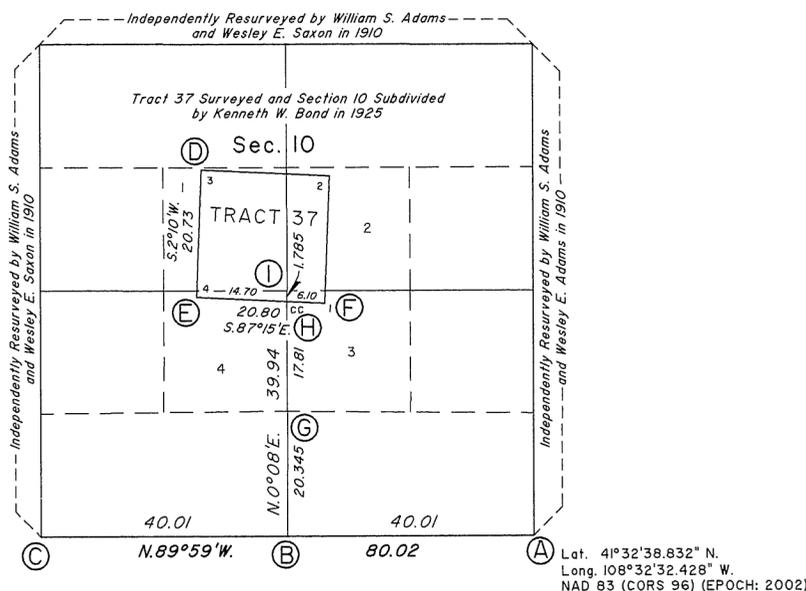

(F) Cor. no. 1 of Tract 37, monumented with a broken iron post, 1 in. diam., 36 ins. long, loosely set, projecting 14 ins. above ground, steel fence post nearby, with brass cap erroneously mkd.

T18N R99W
1 | S 10
TR37
1925

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic coated magnet, with brass cap mkd.

T18N R99W
TR37
1
S 10
2006

Bury the iron post alongside the stainless steel post.

Cor. is located on open greasewood covered ground.

(G) Point for the center S 1/16 sec. cor. of sec. 10.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic coated magnet, with brass cap mkd.

T18N R99W
C
S 1/16 | S 10
C
2001

Set a steel fence post nearby.

Cor. is located 95 lks. N. of a graded road, 32 lks. wide, bears ENE. and WSW.

(H) Intersect line 4-1 of Tract 37.

Point for the closing cor. of the N. and S. center line of sec. 10.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic coated magnet, with brass cap mkd.

T18N R99W
TR37
C
CC | S 10
C
2006

Set a steel fence post nearby.

Cor. is located on open greasewood covered ground.

From this point, cor. no. 1, Tract 37, bears S. 87° 15' E., 6.10 chs. dist.

From this same point, cor. no.4, Tract 37, bears N 87° 15' W, 14.70 chs. dist.

(I) The center 1/4 sec. cor. of sec. 10, monumented with a leaning iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, in a collar of stone, steel fence post nearby, with brass cap mkd.

T18N R99W
S 10
CE | NTER
1925

Cor. is located on open brush covered ground.

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the dependent resurvey of portions of the subdivisional lines, Tract 37 and subdivision of section 10, designed to restore the corners in their true original locations according to the best available evidence, Township 18 North, Range 99 W, Sixth Principal Meridian, Wyoming.

William S. Adams and Wesley E. Saxon independently resurveyed the subdivisional lines in 1910. Kenneth W. Bond surveyed Tract 37 and subdivided section 10 in 1925.

Lottings and areas are as shown on the plats approved November 13, 1912; December 17, 1925 and accepted August 30, 1926.

The survey was executed with TRIMBLE Model 4700 and 5800 Global Positioning System (GPS) receivers. The directions of all lines refer to the true meridian as determined by GPS observations. GPS control network and supporting data are contained in the official group file.

We, Donna S. Malleck and Olian T. Shockley, Cadastral Surveyors, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions dated May 14, 2001, and Assignment Instructions dated May 14, 2001 and May 16, 2006 for Group No. 690, Wyoming, we have dependently resurveyed portions of the subdivisional lines, Tract 37 and subdivision of section 10, Township 18 North, Range 99 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of the survey.

Field Assistants were Bradley J. Dickson, Surveying Technician, Joseph Iliya, Surveying Aid and Ken. G. Magrath, Sweetwater County Surveyor.

Survey executed beginning May 7, 2001 and completed June 13, 2006, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States 1973, and in the Specific Manner described hereon.

Unavailable for signature July 7, 2009
Date
Donna S. Malleck
Cadastral Surveyor
Olian T. Shockley July 7, 2009
Date
Cadastral Surveyor

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming July 7, 2009

This plat, which constitutes the entire record of this survey, having been correctly executed in accordance with the requirements of the law and the regulations of this Bureau, is hereby accepted.

For the Director
John P. Lee
Chief Cadastral Surveyor for Wyoming