

VOLUME WR49

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE
DEPENDENT RESURVEY
OF A PORTION OF
THE SOUTH BOUNDARY OF THE WIND RIVER INDIAN RESERVATION
AND
SUBDIVISIONAL LINES,
AND
THE SURVEY OF THE SUBDIVISION OF SECTION 20,
AND
THE METES AND BOUNDS SURVEY OF CERTAIN LOTS IN SECTION 20,
TOWNSHIP 2 SOUTH, RANGE 1 WEST,
OF THE WIND RIVER MERIDIAN,
IN THE STATE OF WYOMING.

EXECUTED BY

JOEL T. EBNER

CADASTRAL SURVEYOR

Under Special Instructions dated JUNE 20, 2005, approved JUNE 20, 2005, which provided for the surveys included under Group Number 751, and assignment instructions dated JUNE 20, 2005.

Survey commenced JUNE 29, 2005

Survey completed JULY 7, 2005

INDEX DIAGRAM

Township 2 South, Range 1 West

6	5	4	3	2	1	MERIDIAN
7	8	9	10	11	12	
18	17 8	16	15	14	13	
19	10 20 11	6 21	22			RIVER
	4	2				WIND

Subdivision of Section 20.....Page 12
 Metes and Bounds Survey of Lot 5, Section 20.....Page 15
 Metes and Bounds Survey of Lot 6, Section 20.....Page 17
 Metes and Bounds Survey of Lot 7, Section 20.....Page 18
 Metes and Bounds Survey of Lot 8, Section 20.....Page 19

T. 2 S., R. 1 W., Wind River Meridian, Wyoming

<p>Chains</p>	<p>The following field notes are those of the dependent resurvey of a portion of the south boundary of the Wind River Indian Reservation and subdivisional lines, and the survey of the subdivision of section 20, and the metes and bounds survey of certain lots in section 20, Township 2 South, Range 1 West, Wind River Meridian, Wyoming.</p> <p>James W. Miller surveyed the Wind River Meridian (east boundary), the south boundary of the Shoshone Indian Reservation, presently known as the Wind River Indian Reservation (south boundary), a portion of the north boundary and subdivisional lines, and subdivided certain sections in 1875. Robert M. Jones resurveyed a portion of the south boundary in 1885. Howard B. Carpenter surveyed the west boundary in 1891. Edward F. Stahle and C. Edward Artist surveyed the remaining portion of the north boundary, retraced the south and west boundaries, and surveyed the remaining subdivisional lines in 1898. Edwin H. Van Antwerp resurveyed a portion of the south boundary in 1912. Robert A. Farmer and Frederick C. Miller resurveyed the north boundary in 1913. Robert A. Farmer resurveyed the east boundary in 1913. Person(s) unknown surveyed certain Indian Allotments prior to 1914. Robert A. Farmer resurveyed portions of the west boundary, the south boundary, the subdivisional lines and subdivision of section lines and subdivided certain sections in 1914. Guy H. Richardson retraced a portion of the south boundary in 1929.</p> <p>The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 751, Wyoming, dated June 20, 2005.</p> <p>Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The retracement data were thoroughly verified and only true line field notes are given herein, which refer to the completed survey.</p> <p>The survey was executed with Trimble Navigation Model 4700 Global Positioning System (GPS) receivers. The GPS procedures used were in accordance with IM No. 2001-186, "Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods" dated July 26, 2001. The directions of all lines are referenced to the true meridian. GPS control network and supporting data are contained in the official group file.</p>
----------------------	---

T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains

The geographic position of the Initial Point of the south boundary of the Wind River Indian Reservation, based on NAD 83 (1993) and determined by Global Positioning methods is:

Latitude 42° 52' 06.225" N., Longitude 108° 53' 19.162" W.

The mean magnetic declination is 12° E.

Dependent Resurvey,
Portion of the South Boundary, Wind River Indian Reservation,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

(Restoring of the resurvey executed by
Edwin H. Van Antwerp in 1912)

Beginning at the Initial Point of the south boundary of the Wind River Indian Reservation, monumented with a granite boulder, 4x4x3 ft., no marks visible, with an iron pipe, 4 ins. diam., projecting 5 ft. above the ground, in mound of stone on west edge of boulder. This position is accepted as the best available evidence of the original cor. position.

At the corner point

Set a brass tablet, 3¼ ins. diam., 3½ in. stem, in drill hole in top center of boulder, with top mkd.

T2S R1W
S 21
WRIR IP

S 2
T33N R101W
2005

From this point, the meander corner on the S. bdy. of the Wind River Indian Reservation on the left bank of the Popo Agie River, bears N. 89° 52' E., 6.60 chs. dist., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey,
Portion of the South Boundary, Wind River Indian Reservation,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	<p style="text-align: center;">T2SR1W</p> <p style="text-align: center;">129 S 21</p> <p style="text-align: center;">MC</p> <p style="text-align: center;">1914</p>
	<p>S. 89° 35' W., on the 1st Mile, on the S. bdy. of the Wind River Indian Reservation.</p> <p>Over nearly level to mountainous terrain.</p>
19.03	Point for the closing cor. of secs. 20 and 21, T. 2 S., R. 1 W. , hereinafter described
19.97	Road, dirt surface, bears N. 15° E. and S. 15° W.
24.26	From this point, cor. of fences extending W. and N. 15° E., bears NORTH, 27 lks. dist.
24.76	Road, gravel surface, bears N. 10° E. and S. 10° W.
38.99	Point for the E. 1/16 sec. cor. of section 20 only, T. 2 S., R. 1 W., hereinafter described.
45.83	<p>From this point, the original closing cor. of secs. 2 and 3, T. 33 N., R. 101 W., bears SOUTH, 10 lks. dist., monumented with a granite stone, firmly set, projecting 9x7x6 ins. above the ground, plainly mkd. 2 grooves on E. face, CC on S. face and 4 grooves on the W. face, with an embedded mound of stone, 4 ft. base, S. of the cor. and a steel fence post alongside.</p> <p>Rebuild the mound of stone, 3 ft. base, 2 ft. high, S. of the cor. Cor. is located 26 lks. S. of fence extending E. and W</p>
47.65	From this point, intersection of fences extending E., W. and S. 20° W., bears NORTH, 18 lks. dist.
47.71	Fence, bears N. 20° E. and S. 20° W.
48.20	Road, dirt surface, bears N. 24° E. and S. 24° W. Begin steep ascent.

Dependent Resurvey,
Portion of the South Boundary, Wind River Indian Reservation,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
58.95	Point for the 1/4 sec. cor. of section 20 only, T. 2 S., R. 1 W., hereinafter described.
62.10	From this point, an iron post, 4 ins. diam., firmly set, projecting 6 ft. above the ground, in fence extending E. and W., as described in an unrecorded retracement of the south boundary of the Shoshone Indian Reservation, by Guy H. Richardson, U.S. Cadastral Engineer, dated November 7, 1929, bears NORTH, 36 lks. dist. Notes of this retracement are included in the official group file.
62.28	From this point, intersection of fences extending E., N. 50° E., S. 50° W. and abandoned W., bears NORTH, 37 lks. dist.
62.73	Fence, bears N. 50° E. and S. 50° W.
78.28	Mile Post 1, monumented with a limestone, 21x10x6 ins., firmly set 10 ins. in the ground, in a collar of stone, no mks. visible. This position is accepted as the best available evidence of the original cor. position.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, atop a white DEEP-1® magnetic marker, in a collar of stone, with brass cap mkd.
	T2S R1W S 20 WRIR 1M <hr style="width: 20%; margin: auto;"/> S 3 T33N R101W 2005
	Bury the unmkd. stone and set a steel fence post alongside the stainless steel post.
	Cor. is located 42 lks. S. of abandoned fence extending E. and W.
	<hr style="width: 80%; margin-left: 0;"/>
	S. 89° 33' W., on the 2 nd Mile, on the S. bdy. of the Wind River Indian Reservation.
	Over mountainous terrain.

Dependent Resurvey,
Portion of the South Boundary, Wind River Indian Reservation,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
3.36	From this point, an iron post, 4 ins. diam., firmly set, projecting 6 ft. above the ground, in abandoned fence extending E. and W., as described in an unrecorded retracement of the south boundary of the Shoshone Indian Reservation, by Guy H. Richardson, U.S. Cadastral Engineer, dated November 7, 1929, bears NORTH, 42 lks. dist. Notes of this retracement are included in the official group file.
14.62	From this point, an iron post, 4 ins. diam., firmly set, projecting 6.5 ft. above ground, in abandoned fence extending E. and W., as described in an unrecorded retracement of the south boundary of the Shoshone Indian Reservation, by Guy H. Richardson, U.S. Cadastral Engineer, dated November 7, 1929, bears NORTH, 35 lks. dist. Notes of this retracement are included in the official group file.
20.59	Point for the closing cor. of secs. 19 and 20, T. 2 S., R. 1 W., hereinafter described.
47.76	From this point, the closing cor. of secs. 3 and 4, T. 33 N., R. 101 W., bears SOUTH, 1 lk. dist., monumented with a white sandstone, firmly set, projecting 8x8x6 ins. above the ground, plainly mkd. 3 grooves on the E. face, CC on S. face and 3 grooves on W. face. Set a steel fence post alongside the original cor. stone. Cor. is located 20 lks. S. of abandoned fence extending E. and W.
78.27	Mile Post 2, monumented with a white sandstone, 36x12x9 ins., firmly set 17 ins. in the ground, in a collar of stone, plainly mkd. 2 grooves on E. face, faintly marked PL on S. face and SR on N. face. At the corner point Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base to top, with brass cap mkd.
	T2S R1W S 19 WRIR 2M <hr style="width: 20%; margin: auto;"/> S 4 T33N R101W 2005

Dependent Resurvey,
 Portion of the South Boundary, Wind River Indian Reservation,
 T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	<p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 6 lks. S. of abandoned fence extending E. and W.</p> <hr/> <p style="text-align: center;">Dependent Resurvey, Portion of the Subdivisional Lines, T. 2 S., R. 1 W., Wind River Meridian, Wyoming</p> <hr/> <p style="text-align: center;">(Restoring the resurvey executed by Robert A. Farmer in 1914)</p> <hr/> <p>Beginning at the cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, with a sandstone, firmly set, projecting, 8x7x6 ins. above the ground alongside, plainly marked 4 grooves on E. face and 3 grooves on S. face, with an embedded mound of stone, 3 ft. diam., W. of the cor., with brass cap marked.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">116</td> <td style="padding: 0 10px;">117</td> </tr> <tr> <td style="padding: 0 10px;">S 17</td> <td style="padding: 0 10px;">S 16</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; width: 100px; margin: 0 auto;"></td> </tr> <tr> <td style="padding: 0 10px;">S 20</td> <td style="padding: 0 10px;">S 21</td> </tr> <tr> <td colspan="2" style="text-align: center;">1914</td> </tr> </table> </div> <p>Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>S. 0° 02' W., bet. secs. 20 and 21.</p> <p>Over rolling terrain.</p> <p>19.21 Fence, bears N. 35° E. and S. 35° W.</p> <p>19.89 The N. 1/16 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor., with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="padding: 0 10px;">N1/16</td> </tr> <tr> <td style="padding: 0 10px;">S 20</td> <td style="padding: 0 10px;">S 21</td> </tr> <tr> <td colspan="2" style="text-align: center;">1914</td> </tr> </table> </div> <hr/> <p>S. 0° 10' E., beginning new measurement.</p>	116	117	S 17	S 16			S 20	S 21	1914		N1/16		S 20	S 21	1914	
116	117																
S 17	S 16																
S 20	S 21																
1914																	
N1/16																	
S 20	S 21																
1914																	

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	Over rolling terrain.
19.96	<p>The 1/4 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with a granite stone, firmly set, projecting 9x7x7 ins. above the ground alongside, plainly marked 1/4 on W. face and 129 on SE. face, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor., with brass cap mkd.</p>
	$\begin{array}{ccc} & 1/4 & \\ & S\ 20 & \ S\ 21 \\ & & \ 129 \\ & & 1914 \end{array}$ <hr/>
	S. 0° 05' E., beginning new measurement.
	Over rolling terrain.
13.16	Fence, bears N. 22° E. and S. 22° W.
20.01	<p>Point for the S. 1/16 sec. cor. of secs. 20 and 21, identical with Cor. No. 1, Lot 5, sec. 20.</p>
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, atop a white DEEP-1® magnetic marker, in collar of stone, with brass cap mkd.</p>
	$\begin{array}{ccc} & T2S\ R1W & \\ & S1/16 & \\ & S\ 20 & \ S\ 21 \\ & & 2005 \end{array}$
30.83	Road, gravel surface, bears N. 25° E. and S. 25° E.
31.88	Cor. No. 4, Lot 5, sec. 20, identical with Cor. No. 1, Lot 8, sec. 20, hereinafter described.
32.14	<p>The closing cor. of secs. 20 and 21, monumented with an iron post, 36 ins. long, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with a limestone, 17x13x4 ins., firmly set 6 ins. in ground alongside, plainly marked 4 grooves on E. face, 2 grooves on W. face and 129 CC SIR on N. face, with a mound of stone, 3 ft. base, 2 ft. high, N. of the cor., with a steel fence post set alongside, with brass cap mkd.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains																													
	<div style="text-align: center;"> <table border="0"> <tr><td></td><td>T2S</td><td>R1W</td><td></td></tr> <tr><td>S</td><td>20</td><td> </td><td>S 21</td></tr> <tr><td></td><td>C</td><td> </td><td>C</td></tr> <tr><td colspan="4"><hr/></td></tr> <tr><td></td><td colspan="2">1914</td><td></td></tr> </table> </div> <p>Add the marks AM to the original cor. stone and AM 2005 to the brass cap, bury both, 7 ins. below the surface of the ground, destroy the mound of stone and remove the steel fence post.</p>		T2S	R1W		S	20		S 21		C		C	<hr/>					1914										
	T2S	R1W																											
S	20		S 21																										
	C		C																										
<hr/>																													
	1914																												
32.33	<p>Point for the closing cor. of secs. 20 and 21, identical with Cor. No. 4, Lot 8, sec. 20, at intersection with the S. bdy. of the Wind River Indian Reservation.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, in collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td></td><td>T2S</td><td>R1W</td><td></td></tr> <tr><td>S</td><td>20</td><td> </td><td>S 21</td></tr> <tr><td></td><td>C</td><td> </td><td>C</td></tr> <tr><td colspan="4"><hr/></td></tr> <tr><td></td><td>S</td><td>2</td><td></td></tr> <tr><td></td><td>T33N</td><td>R101W</td><td></td></tr> <tr><td></td><td colspan="2">2005</td><td></td></tr> </table> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <p>From this point, the Initial Point of the S. bdy. of the Wind River Indian Reservation, bears N. 89° 35' E., 19.03 chs. dist.</p>		T2S	R1W		S	20		S 21		C		C	<hr/>					S	2			T33N	R101W			2005		
	T2S	R1W																											
S	20		S 21																										
	C		C																										
<hr/>																													
	S	2																											
	T33N	R101W																											
	2005																												
20.04	<hr/> <p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 89° 29' W., bet. secs. 17 and 20.</p> <p>Over rolling terrain.</p> <p>The E. 1/16 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 17 ins. above the ground, in a collar of stone, with brass cap mkd.</p>																												

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	<div style="text-align: center;"> <p>E1/16</p> <p>75 S 17 116</p> <hr style="width: 10%; margin: auto;"/> <p>S 20</p> <p>1914</p> <hr style="width: 50%; margin: auto;"/> </div> <p>N. 89° 47' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
19.81	<p>The 1/4 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam., 30 ins. long, loosely set 6 ins. in the ground, leaning S. with scattered mound of stone to the E. and N., with brass cap mkd.</p> <div style="text-align: center;"> <p>T2S R1W</p> <p>75</p> <p>S 17</p> <p>1/4 <hr style="width: 10%; display: inline-block; vertical-align: middle;"/></p> <p>S 20</p> <p>1914</p> </div> <p>Reset the iron post 12 ins. in the ground to bedrock, supported by a mound of stone, 4 ft. base to top.</p> <hr style="width: 50%; margin: auto;"/> <p>N. 89° 42' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
20.01	<p>The W. 1/16 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above the ground, with top 5 ins. bent S., with an embedded mound of stone, 3 ft base, N. of the cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>W1/16</p> <p>972 S 17 75</p> <hr style="width: 10%; margin: auto;"/> <p>S 20</p> <p>1914</p> <hr style="width: 50%; margin: auto;"/> </div> <p>N. 89° 41' W., beginning new measurement.</p> <p>Ascend steep slope over mountainous terrain.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
19.97	<p>The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. diam., firmly set, projecting 22 ins. above the ground, with a white sandstone, firmly set, projecting 12x10x5 ins. above the ground alongside, plainly marked 5 grooves on E. face and 3 grooves on S. face, with an embedded mound of stone N. of the cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>972 T2S R1W S 18 S 17 ----- S 19 S 20 1914</p> </div> <p>Build a supporting mound of stone around the iron post, 4 ft. base to top.</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by Edward F. Stahle and C. Edward Artist in 1898)</p> <hr/> <p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>S. 0° 39' W. bet. secs. 19 and 20.</p>
39.85	<p>The 1/4 sec. cor. of secs. 19 and 20, monumented with a limestone, 14x12x5 ins., firmly set 9 ins. in the ground, plainly marked 1/4 on west face, with an embedded mound of stone, 3 ft. base, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a white DEEP-1® magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T2S R1W 1/4 S 19 S 20 2005</p> </div> <p>Bury the original cor. stone alongside the stainless steel post and rebuild the mound of stone, 4 ft. base, 2 ft. high, W. of the cor.</p> <hr/> <p>S. 0° 57' E., beginning new measurement.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains															
	Over mountainous terrain.														
1.09	Wash, drains N. 40° E.														
31.80	The original closing cor. of secs. 19 and 20, monumented with a white sandstone, 18x14x7 ins., firmly set 11 ins. in the ground, plainly marked 5 grooves on E. face, 1 groove on W. face and CC SIR on N. face, with a steel fence post set alongside. Add the mks. AM and bury the stone in place, 4 ins. below the surface of the ground and remove the steel fence post.														
33.08	Abandoned fence, bears E. and W.														
33.40	Point for the closing cor. of secs. 19 and 20, at intersection with the S. bdy. of the Wind River Indian Reservation.														
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, atop a white DEEP-1® magnetic marker, in collar of stone, with brass cap mkd.														
	<table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T2S</td> <td style="padding: 0 5px;">R1W</td> </tr> <tr> <td style="padding: 0 5px;">S 19</td> <td style="padding: 0 5px;">S 20</td> </tr> <tr> <td style="padding: 0 5px;">C</td> <td style="padding: 0 5px;">C</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; width: 100px;"></td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">S 3</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T33N R101W</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">2005</td> </tr> </table>	T2S	R1W	S 19	S 20	C	C			S 3		T33N R101W		2005	
T2S	R1W														
S 19	S 20														
C	C														
S 3															
T33N R101W															
2005															
	Set a steel fence post alongside the stainless steel post.														
	From this point, Mile Post 1, on the S. bdy. of the Wind River Indian Reservation, bears N. 89° 33' E., 20.59 chs. dist.														
	<hr/> The point for the 1/4 sec. cor. of sec. 20 only, identical with Cor. No. 3, Lot 7, sec. 20, T. 2 S., R. 1 W., is at midpoint on the S. bdy. of sec. 20.														
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker with brass cap mkd.														

Dependent Resurvey, Portion of the Subdivisional Lines,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	<p style="text-align: center;">T2S R1W 1/4 S 20 <hr/>T33N R101W 2005</p>
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, Mile Post 1 on the S. bdy. of the Wind River Indian Reservation, bears S. 89° 35' W., 19.33 chs. dist.</p> <hr/>
	<p>The point for the E. 1/16 sec. cor. of sec. 20 only, identical with Cor. No. 4, Lot 7, sec. 20 and Cor. No. 3, Lot 8, sec. 20, T. 2 S., R. 1 W., is at midpoint bet. the closing cor. of secs. 20 and 21 and the 1/4 sec. cor. of sec. 20 only, on the S. bdy. of sec. 20.</p>
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, with brass cap mkd.</p>
	<p style="text-align: center;">T2S R1W E1/16 S 20 <hr/>T33N R101W 2005</p>
	<p>Set a steel fence post alongside the stainless steel post.</p> <p>From this point, the Initial Point of the S. bdy. of the Wind River Indian Reservation, bears N. 89° 35' E., 38.99 chs. dist.</p> <hr/>
	<p style="text-align: center;">Subdivision of Section 20, T. 2 S., R. 1 W., Wind River Meridian, Wyoming</p> <hr/>
	<p>From the 1/4 sec. cor. of sec. 20 only, identical with Cor. No. 3, Lot 7, sec. 20. N. 0° 02' W., on the N. and S. center line of sec. 20.</p> <p>Over rolling terrain.</p>
0.34	Fence, bears E. and W.
0.45	Cor. No. 3, Lot 6, identical with Cor. No. 2, Lot 7, hereinafter described.

Subdivision of Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
12.47	<p>Point for the center S. 1/16 sec. cor. of sec. 20, identical with Cor. No. 2, Lot 6.</p> <p>Set a brass tablet, 3¼ ins. diam., 3½ in. stem, in drill hole of rock outcrop, with top mkd.</p> <p style="text-align: center;">T2S R1W C S1/16 S 20 C 2005</p> <p>Set a steel fence post alongside the rock outcrop.</p>
32.86	<p>Point for the center 1/4 sec. cor. of sec. 20, at intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, with brass cap mkd.</p> <p style="text-align: center;">T2S R1W C1/4 S 20 2005</p> <p>Set a steel fence post alongside the stainless steel post.</p>
72.73	<p>The 1/4 sec. cor. of secs. 17 and 20.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 20 and 21.</p> <p>N. 89° 40' W., on the E. and W. center line of sec. 20.</p> <p>Over rolling terrain.</p>
16.52	<p>Fence, bears N. 30° E. and S. 30° W.</p>
19.94	<p>Point for the center E. 1/16 sec. cor. of sec. 20.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, with brass cap mkd.</p>

Subdivision of Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	T2S R1W E1/16 C———C S 20 2005
	Set a steel fence post alongside the stainless steel post.
39.88	The center 1/4 sec. cor. of sec. 20.
79.00	Wash, drains N. 30° E.
80.34	The 1/4 sec. cor. of secs. 19 and 20.
	<hr/> From the E 1/16 sec. cor. of sec. 20 only, identical with Cor. No. 4, Lot 7 and Cor. No. 3, Lot 8. N. 0° 03' W., on the N. and S. center line of the SE¼ of sec. 20. Over rolling terrain.
0.18	Fence, bears E. and W.
0.45	Cor. No. 3, Lot 5, identical with Cor. No. 4, Lot 6, Cor. No. 1, Lot 7 and Cor. No. 2, Lot 8, hereinafter described.
12.40	Point for the SE. 1/16 sec. cor. of sec. 20, identical with Cor. No. 2, Lot 5 and Cor. No. 1, Lot 6, at intersection with the E. and W. center line of the SE¼.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, with brass cap mkd.
	T2S R1W SE1/16 S 20 2005
	Set a steel fence post alongside the stainless steel post.
26.50	Fence, bears N. 30° E. and S. 30° W.
32.60	The center E. 1/16 sec. cor. of sec. 20.
	<hr/>

Subdivision of Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
	<p>From the S. 1/16 sec. cor. of secs. 20 and 21, identical with Cor. No. 1, Lot 5.</p> <p>S. 89° 48' W., on the E. and W. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p>
1.41	Fence, bears N. 25° E. and S. 25° W.
6.70	Road, dirt surface, bears N. 25° E. and S. 25° W.
12.72	Road, dirt surface, bears N. 60° E. and S. 60° W.
19.95	The SE. 1/16 sec. cor. of sec. 20, identical with Cor. No. 2, Lot 5 and Cor. No. 1, Lot 6.
39.90	The center S. 1/16 sec. cor. of sec. 20, identical with Cor. No. 2, Lot 6.
<hr/> <p>Metes and Bounds Survey of Lot 5, Section 20, T. 2 S., R. 1 W., Wind River Meridian, Wyoming</p> <hr/>	
	<p>Beginning at Cor. No. 1, Lot 5, identical with the S. 1/16 sec. cor. of secs. 20 and 21.</p> <p>S. 89° 48' W., on line 1-2, Lot 5, identical in part with the E. and W. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p>
19.95	Cor. No. 2, Lot 5, identical with Cor. No. 1, Lot 6 and the SE. 1/16 sec. cor. of sec. 20.
	<hr/> <p>S. 0° 03' E., on line 2-3, Lot 5, identical with line 1-4, Lot 6 and identical in part with the N. and S. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p>
11.95	<p>Point for Cor. No. 3, Lot 5, identical with Cor. No. 4, Lot 6, Cor. No. 1, Lot 7 and Cor. No. 2, Lot 8.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1 ® magnetic marker, with brass cap mkd.</p>

Metes and Bounds Survey of Lot 5, Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains																						
	<div style="text-align: center;"> <p>T2S R1W S 20</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">LOT 6</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">LOT 5</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">4</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">3</td> </tr> <tr> <td colspan="3" style="border-top: 1px solid black; height: 1px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">1</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">LOT 7</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">LOT 8</td> </tr> </table> <p>2005</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>N. 89° 35' E., on line 3-4, Lot 5, identical with line 1-2, Lot 8.</p> <p>Over rolling terrain.</p>	LOT 6		LOT 5	4		3				1		2	LOT 7		LOT 8						
LOT 6		LOT 5																				
4		3																				
1		2																				
LOT 7		LOT 8																				
<p>19.96</p>	<p>Point for Cor. No. 4, Lot 5, identical with Cor. No. 1, Lot 8, at intersection with the line bet. secs. 20 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1® magnetic marker, in collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T2S R1W</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px;">LOT 5</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">4</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">S 20</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 21</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">1</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">LOT 8</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> </table> <p>2005</p> </div> <hr/> <p>N. 0° 05' W., on line 4-1, Lot 5, identical in part with the line bet. secs. 20 and 21.</p> <p>Over rolling terrain.</p>	LOT 5						4			S 20		S 21				1			LOT 8		
LOT 5																						
4																						
S 20		S 21																				
1																						
LOT 8																						
<p>11.87</p>	<p>Cor. No. 1, Lot 5, identical with the S. 1/16 sec. cor. of secs. 20 and 21 and the point of beginning; said lot contains 23.77 acres, more or less.</p> <hr/>																					

Metes and Bounds Survey of Lot 6, Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

<p>Chains</p>	<p>Beginning at Cor. No. 1, Lot 6, identical with Cor. No. 2, Lot 5 and the SE. 1/16 sec. cor. of sec. 20.</p> <p>S. 89° 48' W., on line 1-2, Lot 6, identical in part with the E. and W. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p> <p>19.95 Cor. No. 2, Lot 6, identical with the center S. 1/16 sec. cor. of sec. 20.</p> <hr/> <p>S. 0° 02' E., on line 2-3, Lot 6, identical in part with the N. and S. center line of sec. 20.</p> <p>Over rolling terrain.</p> <p>12.02 Point for Cor. No. 3, Lot 6, identical with Cor. No. 2, Lot 7.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, atop a white DEEP-1 ® magnetic marker, with brass cap mkd.</p> <div style="text-align: center;"> <p>T2S R1W</p> <p>S 20</p> <p> LOT 6</p> <p> 3</p> <hr style="width: 50px; margin: 0 auto;"/> <p> 2</p> <p> LOT 7</p> <p>2005</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>N. 89° 35' E., on line 3-4, Lot 6, identical with line 1-2, Lot 7.</p> <p>Over rolling terrain.</p> <p>19.96 Cor. No. 4, Lot 6, identical with Cor. No. 3, Lot 5, Cor. No. 1, Lot 7 and Cor. No. 2, Lot 8, at intersection with the N. and S. center line of the SE¼ sec. 20.</p> <hr/> <p>N. 0° 03' W., on line 4-1, Lot 6, identical with line 2-3, Lot 5 and identical in part with the N. and S. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p>
----------------------	---

Metes and Bounds Survey of Lot 6, Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
11.95	<p>Cor. No. 1, Lot 6, identical with Cor. No. 2, Lot 5 and the SE. 1/16 sec. cor. of sec. 20 and the point of beginning; said lot contains 23.92 acres, more or less.</p> <hr/> <p style="text-align: center;">Metes and Bounds Survey of Lot 7, Section 20, T. 2 S., R. 1 W., Wind River Meridian, Wyoming</p> <hr/> <p>Beginning at Cor. No. 1, Lot 7, identical with Cor. No. 3, Lot 5, Cor. No. 4, Lot 6 and Cor. No. 2, Lot 8.</p> <p>S. 89° 35' W., on line 1-2, Lot 7, identical with line 3-4, Lot 6.</p> <p>Over rolling terrain.</p>
19.96	<p>Cor. No. 2, Lot 7, identical with Cor. No. 3, Lot 6, at intersection with the N. and S. center line of sec. 20.</p> <hr/> <p>S. 0° 02' E., on line 2-3, Lot 7, identical in part with the N. and S. center line of sec. 20.</p> <p>Over rolling terrain.</p>
0.45	<p>Cor. No. 3, Lot 7, identical with the 1/4 sec. cor. of sec. 20 only, on the S. bdy. of the Wind River Indian Reservation.</p> <hr/> <p>N. 89° 35' E., on line 3-4, Lot 7, identical in part with the S. bdy. of the Wind River Indian Reservation.</p> <p>Over rolling terrain.</p>
19.96	<p>Cor. No. 4, Lot 7, identical with Cor. No. 3, Lot 8 and the E. 1/16 sec. cor. of sec. 20 only, on the S. bdy. of the Wind River Indian Reservation.</p> <hr/> <p>N. 0° 03' W., on line 4-1, Lot 7, identical with line 2-3, Lot 8 and identical in part with the N. and S. center line of the SE¼ of sec. 20.</p> <p>Over rolling terrain.</p>

Metes and Bounds Survey of Lot 7, Section 20,
T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	
0.45	Cor. No. 1, Lot 7, identical with Cor. No. 3, Lot 5, Cor. No. 4, Lot 6 and Cor. No. 2, Lot 8 and the point of beginning; said lot contains 0.91 acres, more or less.
	<hr/> <p style="text-align: center;">Metes and Bounds Survey of Lot 8, Section 20, T. 2 S., R. 1 W., Wind River Meridian, Wyoming</p> <hr/> <p>Beginning at Cor. No. 1, Lot 8, identical with Cor. No. 4, Lot 5.</p> <p>S. 89° 35' W., on line 1-2, Lot 8, identical with line 3-4, Lot 5.</p> <p>Over rolling terrain.</p>
19.96	Cor. No. 2, Lot 8, identical with Cor. No. 3, Lot 5, Cor. No. 4, Lot 6, and Cor. No. 1, Lot 7, at intersection with the N. and S. center line of the SE ¹ / ₄ sec. 20.
	<hr/> <p>S. 0° 03' E., on line 2-3, Lot 8, identical with line 1-4, Lot 7 and identical in part with the N. and S. center line of the SE¹/₄ of sec. 20.</p> <p>Over rolling terrain.</p>
0.45	Cor. No. 3, Lot 8, identical with Cor. No. 4, Lot 7 and the E. 1/16 sec. cor. of sec. 20 only, on the S. bdy. of the Wind River Indian Reservation
	<hr/> <p>N. 89° 35' E., on line 3-4, Lot 8, identical in part with the S. bdy. of the Wind River Indian Reservation.</p> <p>Over rolling terrain.</p>
19.96	Cor. No. 4, Lot 8, identical with the closing cor. of secs. 20 and 21.
	<hr/> <p>N. 0° 05' W., on line 4-1, Lot 8, identical in part with the line bet. secs. 20 and 21.</p> <p>Over rolling terrain.</p>
0.45	Cor. No. 1, Lot 8, identical with Cor. No. 4, Lot 5 and the point of beginning; said lot contains 0.91 acres, more or less.

T. 2 S., R. 1 W., Wind River Meridian, Wyoming

Chains	<p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in Fremont County, approximately 14 miles northwest of Lander, Wyoming. The terrain varies from nearly level to mountainous, with the elevation ranging from about 6,000 feet to about 7,600 feet above sea level. The soil is primarily sandy loam. The vegetation consists of sagebrush and native grasses.</p> <p>Drainage is provided by several draws which flow intermittently in a northeasterly direction. The area surveyed is uninhabited and there was no evidence of mineral activity. Access is provided by North Fork Road, private roads and several trail roads.</p>
---------------	--

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

FIELD ASSISTANTS


NAMES	CAPACITY
James E. Jacob	Land Surveyor (Student Trainee)

CERTIFICATE OF SURVEY

I, Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of special instructions bearing date of the 20th day of June, 2005, I have dependently resurveyed a portion of the south boundary of the Wind River Indian Reservation and subdivisional lines, and the survey of the subdivision of section 20, and the metes and bounds survey of certain lots in section 20, Township 2 South, Range 1 West, of the Wind River Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction. Said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

NOV 09 2005

(Date)

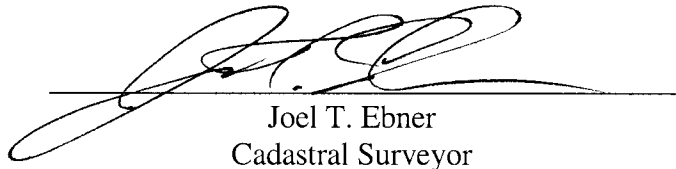

Joel T. Ebner
Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of a portion of the south boundary of the Wind River Indian Reservation and subdivisional lines, and the survey of the subdivision of section 20, and the metes and bounds survey of certain lots in section 20, Township 2 South, Range 1 West, of the Wind River Meridian, Wyoming, executed by Joel T. Ebner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

NOV 09 2005

(Date)

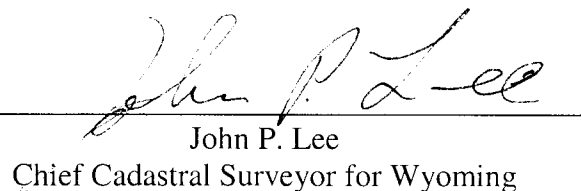

John P. Lee
Chief Cadastral Surveyor for Wyoming